



0 to 71 dB Toggle Step Attenuator, 75 Ohm F Female to 75 Ohm F Female Rated to 1 Watt From 0.3 MHz to 1,000 MHz

TECHNICAL DATA SHEET PE70A1008

Configuration

Design	Step Attenuator
Connector 1	F Female
Connector 2	F Female
Body Material and Plating	Aluminum

Electrical Specifications * Values at 25°C, sea level

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.3		1,000	MHz
Impedance		75		Ohms
Attenuation Value		0 to 71		dB
Step Type		Toggle		
Accuracy Statement		±0.5		
Input Power			1	Watts
VSWR			1.37:1	

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Range	0.0003 to 0.5	0.5 to 1				GHz
Insertion Loss	1.2	2.6				dB

Mechanical Specifications

Size	
Length	3.7007 in 94 mm
Width	1.6929 in 43 mm
Height	0.9055 in 23 mm
Weight	0.335 lbs 151.95 g

Connectors

Description	Connector 1	Connector 2
Type	F Female	F Female

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	
REACH Compliant	12/17/2015

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [0 to 71 dB Toggle Step Attenuator, 75 Ohm F Female to 75 Ohm F Female Rated to 1 Watt From 0.3 MHz to 1,000 MHz PE70A1008](#)



0 to 71 dB Toggle Step Attenuator, 75 Ohm F Female to 75 Ohm F Female Rated to 1 Watt From 0.3 MHz to 1,000 MHz

TECHNICAL DATA SHEET

PE70A1008

Plotted and Other Data

Notes:

- Values at 25 °C, sea level

0 to 71 dB Toggle Step Attenuator, 75 Ohm F Female to 75 Ohm F Female Rated to 1 Watt From 0.3 MHz to 1,000 MHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [0 to 71 dB Toggle Step Attenuator, 75 Ohm F Female to 75 Ohm F Female Rated to 1 Watt From 0.3 MHz to 1,000 MHz PE70A1008](https://www.pasternack.com/71db-step-f-female-f-female-0-watts-attenuator-pe70a1008-p.aspx)

URL: <https://www.pasternack.com/71db-step-f-female-f-female-0-watts-attenuator-pe70a1008-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE70A1008 CAD Drawing

0 to 71 dB Toggle Step Attenuator, 75 Ohm F Female to 75 Ohm F Female Rated to 1 Watt From 0.3 MHz to 1,000 MHz

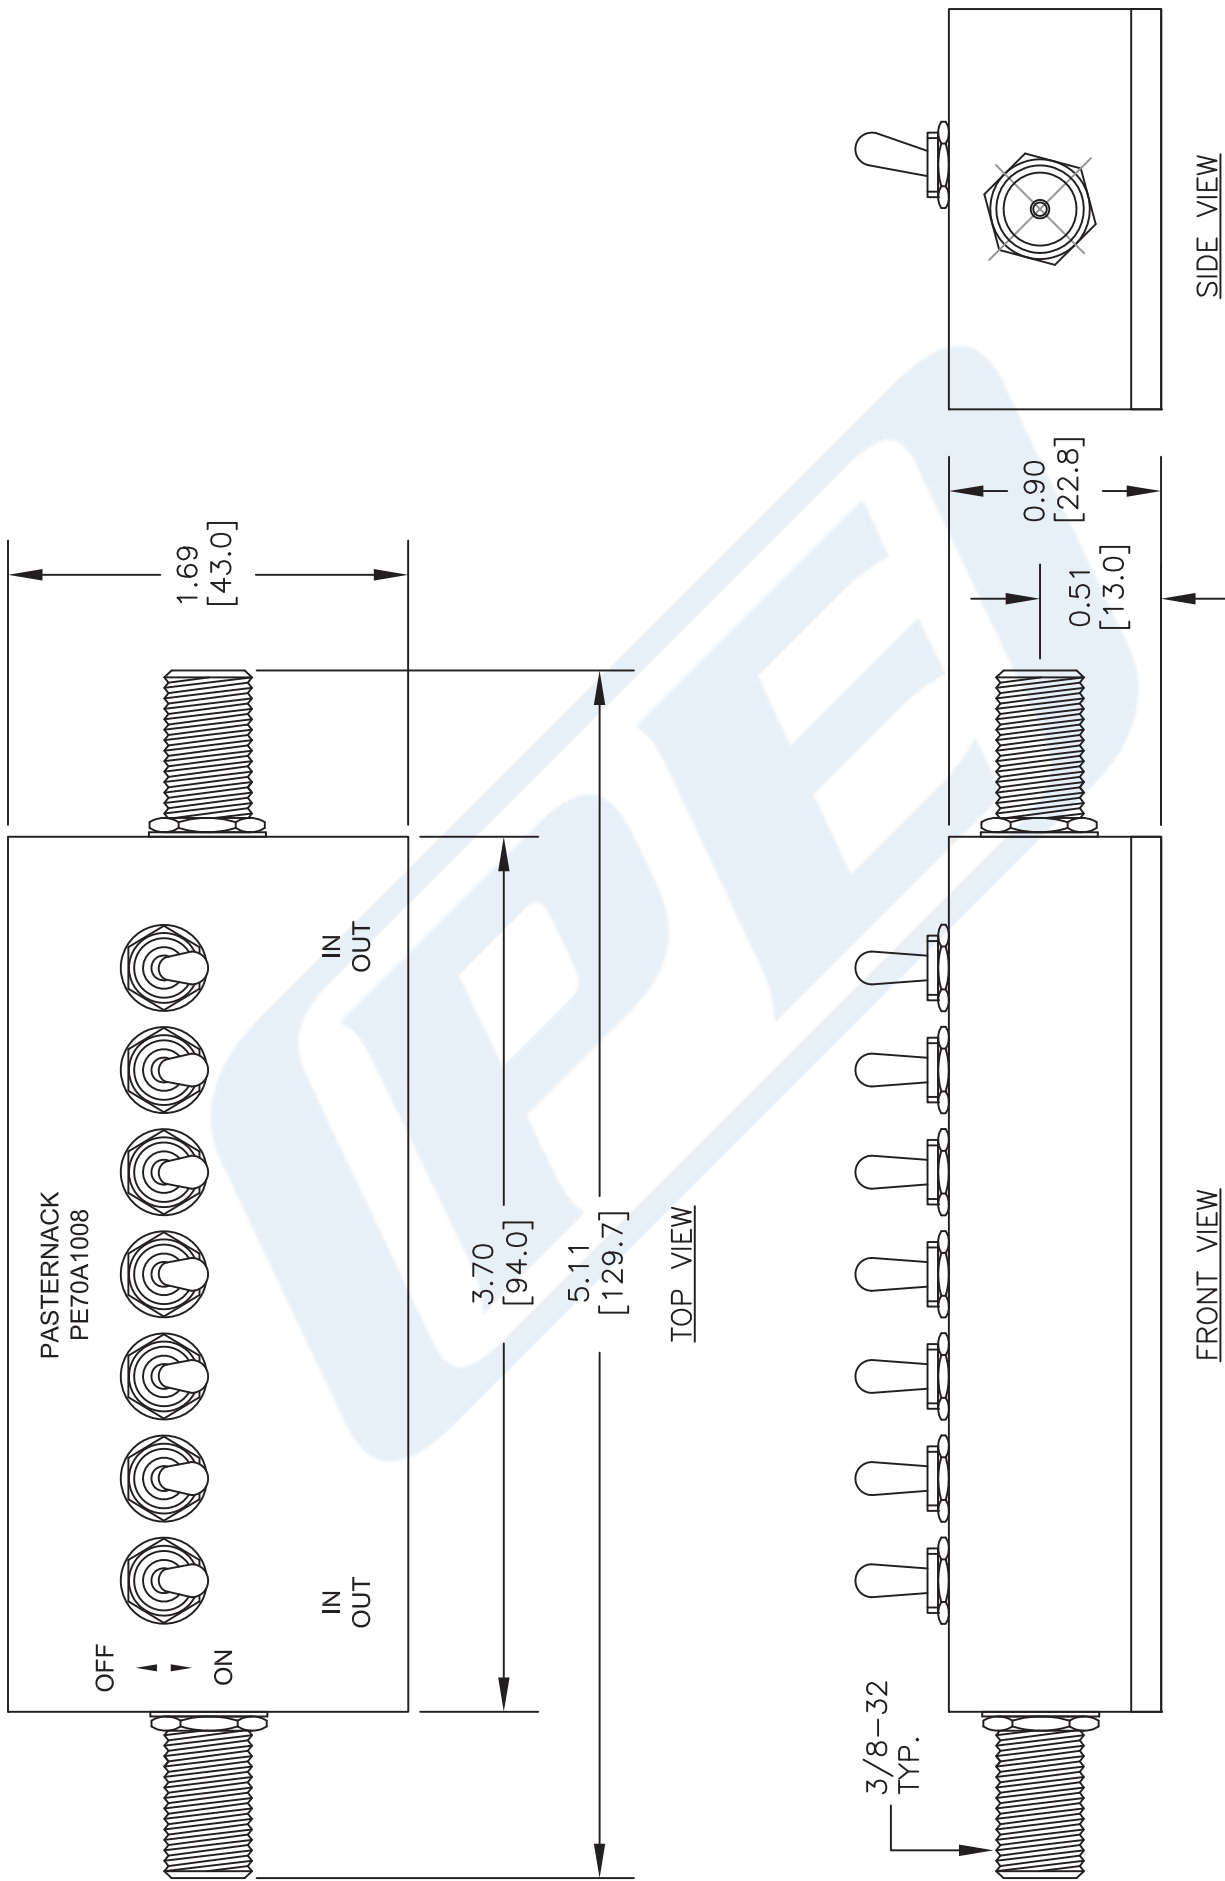

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE70A1008

(PE) PASTERNAK®
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 052815 SCALE N/A SIZE A 2233