
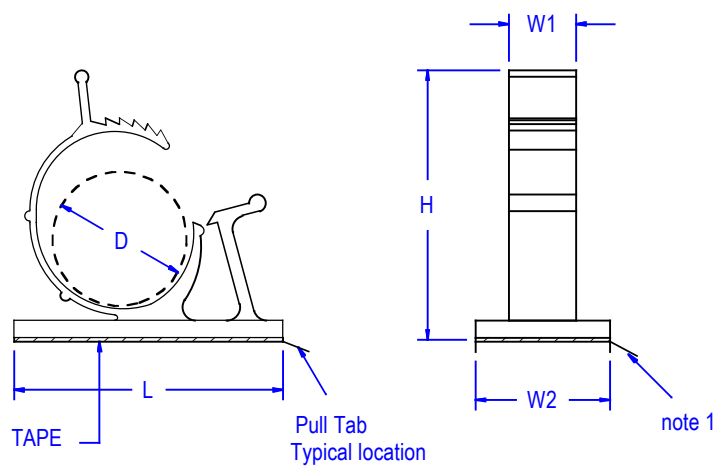


04-08-xxx Series



ITEM #	D		L		W1		W2		H		Material	Adhesive	Packing (Pcs/bag)
	BUNDLE DIA. Inches	RANGE mm.	±.015 Inches	±0.4 mm.	±.015 Inches	±0.4 mm.	±.015 Inches	±0.4 mm.	Reference Inches	mm.			
04-08-008	.22 - .26	5.5 - 6.5	.85	21.6	.39	10	.65	16.5	.71	18	MR-01	MR-59	500
04-08-108	.31 - .41	7.9 - 10.3	1.00	25.4	.40	10.2	.75	19.1	.87	22.2	MR-12	MR-48	100
04-08-208	.47 - .56	11.9 - 14.3	1.25	31.8	.40	10.2	.75	19.1	1.09	27.8	MR-12	MR-48	100
04-08-308	.58 - .75	14.7 - 19.1	1.50	38.1	.50	12.7	.75	19.1	1.25	31.8	MR-12	MR-48	100
04-08-408	.87 - .98	22.2 - 25.2	2.00	50.5	.50	12.7	1.00	25.4	1.75	44.5	MR-01	MR-59	200

- NOTES:
 1. PULL TAB LOCATION FOR PART NO 04-08-408 and 04-08-008
 2. UL RATED 94V-0 MATERIAL AVAILABLE ON REQUEST. TO ORDER ADD SUFFIX "X" TO ITEM NUMBER.

MATERIAL	NYLON 66
UL RATING	94V-2
UL FILE NO.	E70062
COLOR	BLACK
RoHS COMPLIANCE	YES
TEMPERATURE RANGE (REF.)	-40 to 185°F (-40 to 85°C)
MATERIAL NUMBER	MR-01

ADHESIVE	ACRYLIC
CARRIER	POLYETHYLENE
THICKNESS	.043 (1.1) ±15%
COLOR	WHITE
RoHS COMPLIANCE	YES
SERVICE TEMPERATURE	158°F (70 °C)
MR NUMBER	48

MATERIAL	NYLON 66
UL RATING	94V-2
UL FILE NO.	E41938
COLOR	NATURAL
RoHS COMPLIANCE	YES
TEMPERATURE RANGE (REF.)	-40 to 185°F (-40 to 85°C)
MR NUMBER	12

ADHESIVE	RUBBER
CARRIER	Pe. duble silicon Kraft paper
THICKNESS	.040 (1mm)
COLOR	WHITE
UL FILE NO.	NA
RoHS COMPLIANCE	NA
SERVICE TEMPERATURE	50 to 95°F (10 to 35 °C)
MR NUMBER	59

					BY	DATE	Title	
							CABLE CLAMP, ADJUSTABLE	
					VERIFIED		Part No.	Issue
					REVIEWED	FL		
					DRAWN	FL	SEE TABLE	0
					DIMENSIONS Inches (mm) Tolerance AS NOTED			Drwg. type
					ALL ELECTRONICS HARDWARE INC. 2642 Corporate Parkway Algonquin, IL. 60102 1-800-778-7234			
No	Revision	Date	Init.				CATALOG	6-06-19
							File No.	04-08-xxx series