



6dB DC Bias Attenuator, TNC Male to TNC Female Brass  
Tri-Metal Body Rated to 2 Watts from 100MHz to 3 GHz

## DC Bias Attenuators Technical Data Sheet

**PE7449-6**

Pasternack carries a wide range of fixed attenuators with a broad selection of attenuation levels, frequency ranges, and power dissipation ranges. RF microwave attenuators (also known as RF pads) lower the amplitude of a signal (attenuate) a known amount and can be used in a wide variety of applications. These attenuator pads are used when a signal needs to be reduced to protect measurement equipment or other circuitry, to extend the range of power meters and amplifiers, and to impedance match circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Pasternack carries one of the largest in-stock varieties and ships them same day. The PE7449-6 is a 6 dB DC passing Fixed Attenuator that operates from 100 MHz to 3 GHz and is rated to 2 Watts and 0.1A DC current. PE7449-6 would only attenuate RF signal without reducing the DC current passing through the part. The versatile coaxial package uses TNC male to TNC female connectors.

- 0.1GHz to 3GHz Frequency Range
- Input Power 2 Watts (CW)
- 50ohm impedance
- Attenuation 6±2.5dB
- DC Bias Current 100mA Max
- VSWR < 1.35:1

### Configuration

Design	DC Bias Attenuator
Connector 1	TNC Male
Connector 2	TNC Female
Body Material and Plating	Brass, Tri-Metal

### Electrical Specifications

Frequency Range, GHz	0.1 to 3
Impedance, Ohms	50
Attenuation Value, dB	6
Attenuation Accuracy, dB	±2.5
Maximum Input Power, Watts	2
Maximum VSWR	1.35:1
Maximum DC Bias Voltage, Volts	100
Maximum DC Bias Current, A	0.1

### Mechanical Specifications

#### Size

Length, in [mm]	2.319 [58.9]
Width, in [mm]	0.63 [16]
Height, in [mm]	0.63 [16]
Weight, lbs [g]	0.088 [39.92]

#### Connector 1

Type	TNC Male
Contact Material and Plating	Beryllium Copper, Gold

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6dB DC Bias Attenuator, TNC Male to TNC Female Brass Tri-Metal Body Rated to 2 Watts from 100MHz to 3 GHz PE7449-6](#)



6dB DC Bias Attenuator, TNC Male to TNC Female Brass  
Tri-Metal Body Rated to 2 Watts from 100MHz to 3 GHz

## DC Bias Attenuators Technical Data Sheet

**PE7449-6**

Outer Conductor Material and Plating

Beryllium Copper, Gold

**Connector 2**

Type

TNC Female

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

**Plotted and Other Data**

Notes:

Values at 25 °C, sea level  
Attenuation accuracy is Typical

6dB DC Bias Attenuator, TNC Male to TNC Female Brass Tri-Metal Body Rated to 2 Watts from 100MHz to 3 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [6dB DC Bias Attenuator, TNC Male to TNC Female Brass Tri-Metal Body Rated to 2 Watts from 100MHz to 3 GHz PE7449-6](https://www.pasternack.com/6db-dc-bias-tnc-male-tnc-female-2-watts-attenuator-pe7449-6)

URL: <https://www.pasternack.com/6db-dc-bias-tnc-male-tnc-female-2-watts-attenuator-pe7449-6-p.aspx>

# PE7449-6 CAD Drawing

6dB DC Bias Attenuator, TNC Male to TNC Female Brass Tri-Metal Body Rated to 2 Watts from 100MHz to 3 GHz

REVISIONS		
REV.	DESCRIPTION	DATE
A	INITIAL RELEASE	08/08/2022
		APPROVED
		SPONG

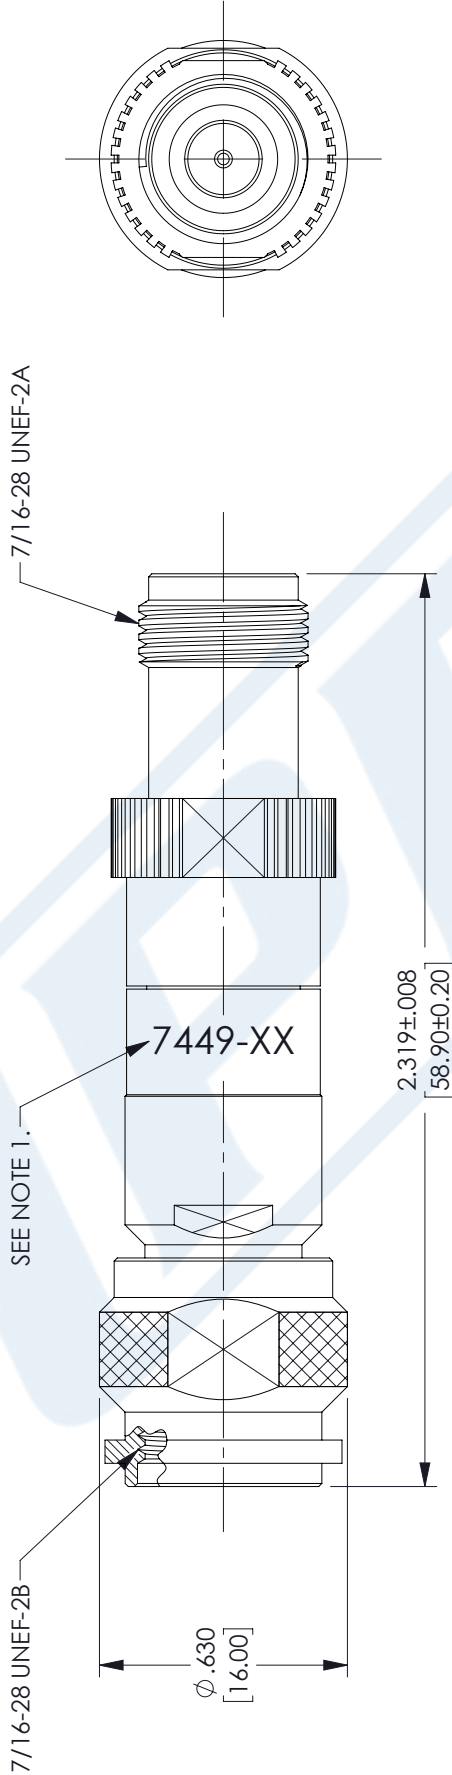

<p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [ ] ARE MILLIMETERS</p> <p>TOLERANCES:</p> <table border="0"> <tr> <td>.X = ±.2</td> <td>[5.08]</td> <td>FRACTIONS</td> <td></td> </tr> <tr> <td>.XX = ±.02</td> <td>[.51]</td> <td></td> <td>±.132</td> </tr> <tr> <td>.XXX = ±.005</td> <td>[.13]</td> <td>ANGLES ± 1°</td> <td></td> </tr> </table> <p>CABLE LENGTH (L) TOLERANCES:</p> <table border="0"> <tr> <td>L ≤ 12</td> <td>[305]</td> <td>= +1 [25] / -0</td> </tr> <tr> <td>12 [305] &lt; L ≤ 60</td> <td>[1524]</td> <td>= +2 [51] / -0</td> </tr> <tr> <td>60 [1524] &lt; L ≤ 120</td> <td>[3048]</td> <td>= +4 [102] / -0</td> </tr> <tr> <td>120 [3048] &lt; L ≤ 300</td> <td>[7620]</td> <td>= +6 [152] / -0</td> </tr> <tr> <td>300 [7620] &lt; L =</td> <td></td> <td>+5%L / -0</td> </tr> </table> <p>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p>	.X = ±.2	[5.08]	FRACTIONS		.XX = ±.02	[.51]		±.132	.XXX = ±.005	[.13]	ANGLES ± 1°		L ≤ 12	[305]	= +1 [25] / -0	12 [305] < L ≤ 60	[1524]	= +2 [51] / -0	60 [1524] < L ≤ 120	[3048]	= +4 [102] / -0	120 [3048] < L ≤ 300	[7620]	= +6 [152] / -0	300 [7620] < L =		+5%L / -0	<p><b>PE PASTERNAK</b> an INFINITI<sup>®</sup> brand</p> <p>Pasternack Enterprises, Inc. P. O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920   1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com</p>	<p>THIRD-ANGLE PROJECTION</p> <p>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED.</p> <p>SHEET 1 OF 1</p> <p>SCALE N/A</p>
	.X = ±.2	[5.08]	FRACTIONS																										
.XX = ±.02	[.51]		±.132																										
.XXX = ±.005	[.13]	ANGLES ± 1°																											
L ≤ 12	[305]	= +1 [25] / -0																											
12 [305] < L ≤ 60	[1524]	= +2 [51] / -0																											
60 [1524] < L ≤ 120	[3048]	= +4 [102] / -0																											
120 [3048] < L ≤ 300	[7620]	= +6 [152] / -0																											
300 [7620] < L =		+5%L / -0																											
<p>SIZE A</p> <p>CAGE CODE 53919</p> <p>DRAWN BY AKRESOWSK</p> <p>ITEM NO. PE7449</p> <p>REV A</p>																													

- NOTES:
- ITEM IS MARKED WITH ITEM NUMBER WHERE SHOWN. "-XX" DENOTES THE ATTENUATION VALUE, EXAMPLE: 7449-3 = 3dB, 7449-10 = 10dB, ETC.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.