



POWER SUPPLY

- AC 100-120 Single-Phase Input
- Width only 32mm
- Efficiency up to 90.0%
- Easy Fuse Breaking due to High Overload Peak Current
- 20% Output Power Reserves
- Full Power up to +60°C
- 3 Year Warranty

GENERAL DESCRIPTION

The DIMENSION C-Line units are cost optimized power supplies without compromising quality, reliability and performance. The C-Line is part of the DIMENSION power supply family, existing alongside the high featured Q-Line.

The CS5.243 includes all the essential basic functions and the devices have a power reserve of 20%. This extra current may even be used continuously at temperatures up to +45°C.

The most important features are the small size, high efficiency and the wide temperature range.

The unit also has an input for 100-120V mains only. This supports regional applications and offers additional cost savings without sacrificing functionality.

High immunity to transients and power surges as well as low electromagnetic emission and a large international approval package for a variety of applications makes this unit suitable for nearly every situation.

SHORT-FORM DATA

| | | |
|-------------------|----------------|-------------------|
| Output voltage | DC 24V | |
| Adjustment range | 24 - 28V | |
| Output current | 5A | at 24V, amb <60°C |
| | 6A | at 24V, amb <45°C |
| | 4.3A | at 28V, amb <60°C |
| | 5.1A | at 28V, amb <45°C |
| Output power | 120W | ambient <60°C |
| | 144W | ambient <45°C |
| Output ripple | < 50mVpp | 20Hz to 20MHz |
| AC Input voltage | AC 100-120V | ±10% |
| Mains frequency | 50-60Hz | ±6% |
| AC Input current | 1.88A | at 120Vac |
| DC Input voltage | - | not allowed |
| Power factor | 0.59 | at 120Vac |
| AC Inrush current | 45A peak | at 120Vac |
| Efficiency | 90.0% | at 120Vac |
| Losses | 13.5W | at 120Vac |
| Temperature range | -10°C to +70°C | operational |
| Derating *) | 3W/°C | +60 to +70°C |
| Hold-up time | 78ms | at 120Vac |
| Dimensions | 32x124x117mm | WxHxD |
| Weight | 500g / 1.1lb | |

ORDER NUMBERS

| | | |
|--------------|----------------|--|
| Power Supply | CS5.243 | 24-28V Standard unit (AC 100-120V-Version) |
| Accessory | ZM1.WALL | Wall mount bracket |
| | ZM13.SIDE | Side mount bracket |
| | YRM2.DIODE | Redundancy module |

MARKINGS



UL 508



IEC 60950-1



UL 60950-1



Marine



Class I Div 2



INDEX

| | Page | | Page |
|--|------|---|------|
| 1. Intended Use | 3 | 19. Regulatory Compliance | 19 |
| 2. Installation Requirements | 4 | 20. Physical Dimensions and Weight | 20 |
| 3. AC-Input | 5 | 21. Accessories | 21 |
| 4. DC-Input | 7 | 21.1. ZM1.WALL - Wall Mounting Bracket | 21 |
| 5. Input Inrush Current | 7 | 21.2. ZM13.SIDE - Side Mounting Bracket | 21 |
| 6. Output | 8 | 21.3. Redundancy Modules | 22 |
| 7. Hold-up Time | 9 | 22. Application Notes | 23 |
| 8. Efficiency and Power Losses | 10 | 22.1. Peak Current Capability | 23 |
| 9. Lifetime Expectancy and MTBF | 11 | 22.2. Back-feeding Loads | 24 |
| 10. Functional Diagram | 11 | 22.3. External Input Protection | 24 |
| 11. Terminals and Wiring | 12 | 22.4. Parallel Use to Increase Output Power | 24 |
| 12. Front Side and User Elements | 13 | 22.5. Parallel Use for Redundancy | 24 |
| 13. EMC | 14 | 22.6. Series Operation | 25 |
| 14. Environment | 15 | 22.7. Inductive and Capacitive Loads | 25 |
| 15. Protection Features | 16 | 22.8. Charging of Batteries | 25 |
| 16. Safety Features | 16 | 22.9. Use in a Tightly Sealed Enclosure | 25 |
| 17. Dielectric Strength | 17 | 22.10. Mounting Orientations | 26 |
| 18. Approvals and Fulfilled Standard | 18 | | |

The information presented in this document is believed to be accurate and reliable and may change without notice. No part of this document may be reproduced or utilized in any form without permission in writing from the publisher.

TERMINOLOGY, ABBREVIATIONS AND DEFINITIONS

| | |
|--|---|
| PE and \oplus symbol | PE is the abbreviation for Protective Earth and has the same meaning as the symbol \oplus . |
| Earth, Ground | This document uses the term "earth" which is the same as the U.S. term "ground". |
| T.b.d. | To be defined, value or description will follow later. |
| AC 120V | A figure displayed with the AC or DC before the value represents a nominal voltage with standard tolerances (usually $\pm 15\%$) included. E.g.: DC 12V describes a 12V battery disregarding whether it is full (13.7V) or flat (10V) |
| 120Vac | A figure with the unit (Vac) at the end is a momentary figure without any additional tolerances included. |
| 50Hz vs. 60Hz | As long as not otherwise stated, AC 100V parameters are valid at 50Hz mains frequency and AC 120V parameters are valid for 60Hz mains frequency. |
| may | A key word indicating flexibility of choice with no implied preference. |
| shall | A key word indicating a mandatory requirement. |
| should | A key word indicating flexibility of choice with a strongly preferred implementation. |

1. INTENDED USE

This device is designed for installation in an enclosure and is intended for commercial use, such as in industrial control, process control, monitoring, measurement equipment or the like.

Do not use this device in equipment, where malfunctioning may cause severe personal injury or threaten human life without additional appropriate safety devices, that are suited for the end application.

If this device is used in a manner outside of its specification, the protection provided by the device may be impaired.

2. INSTALLATION REQUIREMENTS

Install device in an enclosure providing protection against electrical, mechanical and fire hazards.

Install the device onto a DIN-rail according to EN 60715 with the input terminals on the bottom of the device. Other mounting orientations require a reduction in output current.

Make sure that the wiring is correct by following all local and national codes. Use appropriate copper cables that are designed for a minimum operating temperature of 60°C for ambient temperatures up to +45°C, 75°C for ambient temperatures up to +60°C and 90°C for ambient temperatures up to +70°C. Ensure that all strands of a stranded wire enter the terminal connection. Use ferrules for wires on the input terminals. Unused screw terminals should be securely tightened.

The device is designed for pollution degree 2 areas in controlled environments. No condensation or frost is allowed.

The enclosure of the device provides a degree of protection of IP20. The housing does not provide protection against spilled liquids.

The device is designed for overvoltage category II zones. Below 2000m altitude the device is tested for impulse withstand voltages up to 4kV, which corresponds to OVC III according to IEC 60664-1.

The device is designed as "Class of Protection I" equipment according to IEC 61140. Do not use without a proper PE (Protective Earth) connection.

The device is suitable to be supplied from TN, TT and IT mains networks. The continuous voltage between the input terminals and the PE potential must not exceed 300Vac.

A disconnecting means shall be provided for the input of the device.

The device is designed for convection cooling and does not require an external fan. Do not obstruct airflow and do not cover ventilation grid!

The device is designed for altitudes up to 5000m (16400ft). Above 2000m (6560ft) a reduction in output current is required.

Keep the following minimum installation clearances: 40mm on top, 20mm on the bottom, 5mm left and right side. Increase the 5mm to 15mm in case the adjacent device is a heat source. When the device is permanently loaded with less than 50%, the 5mm can be reduced to zero.

The device is designed, tested and approved for branch circuits up to 20A without additional protection device. If an external fuse is utilized, do not use circuit breakers smaller than 16A B- or 10A C-Characteristic to avoid a nuisance tripping of the circuit breaker.

The maximum surrounding air temperature is +70°C (+158°F). The operational temperature is the same as the ambient or surrounding air temperature and is defined 2cm below the device.

The device is designed to operate in areas between 5% and 95% relative humidity.

⚠ WARNING Risk of electrical shock, fire, personal injury or death.

- Do not use the power supply without proper grounding (Protective Earth). Use the terminal on the input block for earth connection and not one of the screws on the housing.
- Turn power off before working on the device. Protect against inadvertent re-powering.
- Make sure that the wiring is correct by following all local and national codes.
- Do not modify or repair the unit.
- Do not open the unit as high voltages are present inside.
- Use caution to prevent any foreign objects from entering the housing.
- Do not use in wet locations or in areas where moisture or condensation can be expected.
- Do not touch during power-on, and immediately after power-off. Hot surfaces may cause burns.

Notes for use in hazardous location areas:

The power supply is suitable for use in Class I Division 2 Groups A, B, C, D locations.

WARNING EXPLOSION HAZARDS!

Substitution of components may impair suitability for this environment.

Do not disconnect the unit or operate the voltage adjustment unless power has been switched off or the area is known to be non-hazardous.

3. AC-INPUT

| | | | |
|---------------------------------|--------------------------------------|---------------------------------------|---|
| AC input | nom. | AC 100-120V | ±10% |
| Mains network systems | | TN, TT or IT | |
| AC input range | | 90-132Vac / 85-90Vac 132-150Vac | continuous operation short-tem or with reduced output current, see Fig. 3-5. max. 500ms |
| Allowed voltage L or N to earth | max. | 300Vac | continuous, IEC 62103 |
| Input frequency | nom. | 50–60Hz | ±6% |
| Turn-on voltage | typ. | 60Vac | steady-state value, see Fig. 3-1 |
| Shut-down voltage | typ. | 55Vac | steady-state value, see Fig. 3-1 |
| External input protection | See recommendations in chapter 22.3. | | |

| | | AC 100V | AC 120V | |
|-------------------|------|----------------|----------------|---|
| Input current | typ. | 2.23A | 1.88A | at 24V, 5A, see Fig. 3-3 |
| Power factor*) | typ. | 0.6 | 0.59 | at 24V, 5A, see Fig. 3-4 |
| Crest factor**) | typ. | 2.9 | 3.1 | at 24V, 5A |
| Start-up delay | typ. | 120ms | 120ms | see Fig. 3-2 |
| Rise time | typ. | 8ms | 8ms | at 24V, 5A const. current load, 0mF load capacitance, see Fig. 3-2 |
| | typ. | 25ms | 25ms | at 24V, 5A const. current load, 5mF load capacitance,, see Fig. 3-2 |
| Turn-on overshoot | max. | 400mV | 400mV | see Fig. 3-2 |

*) The power factor is the ratio of the true (or real) power to the apparent power in an AC circuit.

***) The crest factor is the mathematical ratio of the peak value to RMS value of the input current waveform.

Fig. 3-1 **Input voltage ranges**

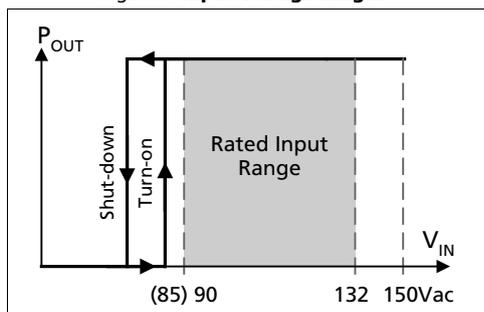


Fig. 3-2 **Turn-on behavior, definitions**

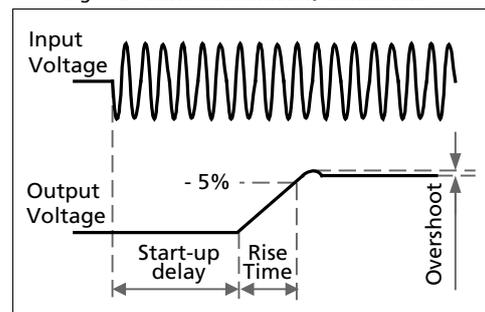


Fig. 3-3 **Input current vs. output load at 24V**

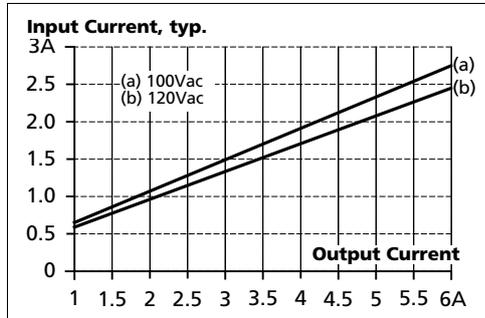


Fig. 3-4 **Power factor vs. output load**


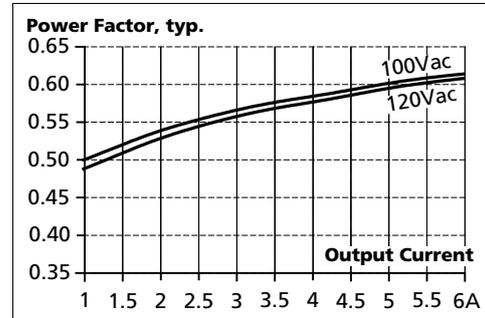


Fig. 3-5 **Input voltage derating**

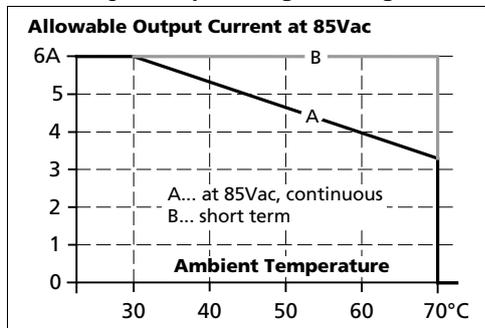

4. DC-INPUT

Do not operate this power supply with DC-input voltage. Use the QS5.241 unit instead.

5. INPUT INRUSH CURRENT

After turn-on of the input voltage, an active inrush limitation circuit limits the input inrush current. Virtually no input inrush current is generated.

The charging current into the EMI suppression capacitors is disregarded in the first microseconds after switch-on.

| | | AC 100V | AC 120V | |
|----------------|------|---------------------|---------------------|------------------------------|
| Inrush current | max. | 47A _{peak} | 56A _{peak} | at +40°C ambient, cold start |
| | typ. | 38A _{peak} | 45A _{peak} | at +40°C ambient, cold start |
| Inrush energy | max. | 2A ² s | 3A ² s | at +40°C ambient, cold start |

Fig. 5-1 Typical input inrush current behavior



Input: 120Vac
 Output: 24V, 5A
 Ambient: +40°C

Upper curve: Input current (20A / DIV)
 Medium curve: Input voltage (100V / DIV)
 Lower curve: Output voltage (10V / DIV)
 Time scale: 10ms / DIV

6. OUTPUT

| | | | |
|--|------|---------------------|---|
| Output voltage | nom. | 24V | |
| Adjustment range | | 24-28V | guaranteed |
| | max. | 30V ^{***)} | at clockwise end position of potentiometer |
| Factory settings | typ. | 24.1V | ±0.2%, at full load, cold unit, |
| Line regulation | max. | 70mV | 90-132Vac |
| Load regulation | max. | 100mV | static value, 0A → 5A; see Fig. 6-1 |
| Ripple and noise voltage | max. | 50mVpp | 20Hz to 20MHz, 50Ohm |
| Output current | nom. | 5A | at 24V, ambient temperature <60°C, see Fig. 6-1 |
| | nom. | 6A ^{*)} | at 24V, ambient temperature <45°C |
| | nom. | 3.75A | at 24V and 70°C ambient temperature |
| | nom. | 4.3A | at 28V, ambient temperature <60°C, see Fig. 6-1 |
| | nom. | 5.1A ^{*)} | at 28V, ambient temperature <45°C, see Fig. 6-1 |
| | nom. | 3.2A | at 28V and 70°C ambient temperature |
| Reduce output current linearly between +45°C and +70°C | | | |
| Output power | nom. | 120W | continuously available |
| | nom. | 144W ^{*)} | Power Boost ^{® *)} |
| Overload behavior | | continuous current | see Fig. 6-1 |
| Short-circuit current | min. | 10A ^{**)} | load impedance <200mOhm, see Fig. 6-1 |
| | max. | 14A ^{**)} | load impedance <200mOhm, see Fig. 6-1 |
| Output capacitance | typ. | 1 800µF | included inside the power supply |


***) Power Boost**

This power/ current is continuously allowed up to an ambient temperature of 45°C. Above 45°C, do not use this power/ current longer than a duty cycle of 10% and/ or not longer than 1 minute every 10 minutes.

****)** Discharge current of output capacitors is not included.

*****)** This is the maximum output voltage which can occur at the clockwise end position of the potentiometer due to tolerances. It is not a guaranteed value which can be achieved. The typical value is about 28.5V.

Fig. 6-1 **Output voltage vs. output current, typ.**

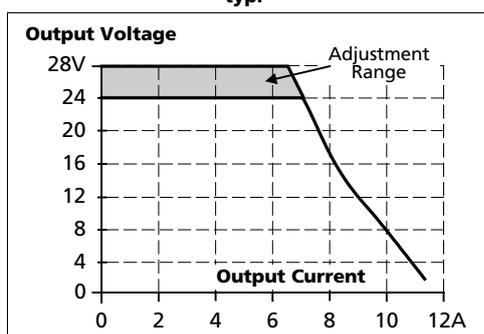

7. HOLD-UP TIME

| | | AC 100V | AC 120V | |
|--------------|------|----------------|----------------|----------------------------|
| Hold-up Time | typ. | 109ms | 165ms | at 24V, 2.5A, see Fig. 7-1 |
| | min. | 87ms | 135ms | at 24V, 2.5A, see Fig. 7-1 |
| | typ. | 50ms | 80ms | at 24V, 5A, see Fig. 7-1 |
| | min. | 39ms | 63ms | at 24V, 5A, see Fig. 7-1 |
| | typ. | 37ms | 62ms | at 24V, 6A, see Fig. 7-1 |
| | min. | 30ms | 49ms | at 24V, 6A, see Fig. 7-1 |

Fig. 7-1 **Hold-up time vs. input voltage**


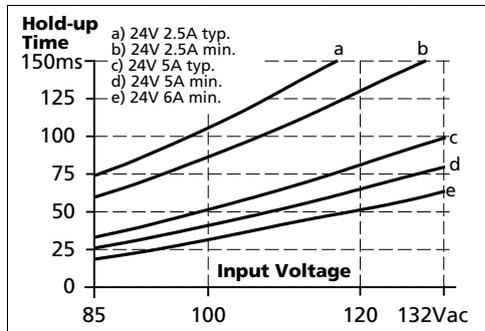


Fig. 7-2 **Shut-down behavior, definitions**

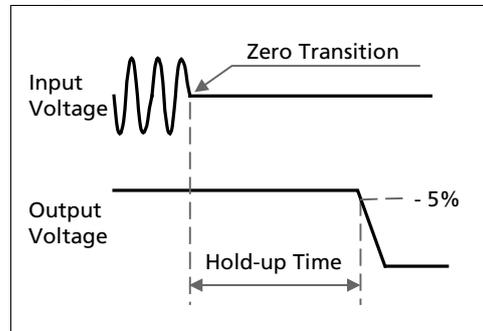

Note: At no load, the hold-up time can be up to several seconds. The green DC-OK lamp is on during this time.

8. EFFICIENCY AND POWER LOSSES

| | | AC 100V | AC 120V | |
|----------------------------------|------|----------------|----------------|--|
| Efficiency | typ. | 89.5% | 90.0% | at 24V, 5A |
| | typ. | 88.8% | 89.3% | at 24V, 6A (Power Boost) |
| Average efficiency ^{*)} | typ. | 87.7% | 88.0% | 25% at 1.25A, 25% at 2.5A, 25% at 3.75A, 25% at 5A |
| Power losses | typ. | 1.3W | 1.4W | at 24V, 0A |
| | typ. | 8.5W | 8.2W | at 24V, 2.5A |
| | typ. | 14.3W | 13.5W | at 24V, 5A |
| | typ. | 18.1W | 17.2W | at 24V, 6A (Power Boost) |

*) The average efficiency is an assumption for a typical application where the power supply is loaded with 25% of the nominal load for 25% of the time, 50% of the nominal load for another 25% of the time, 75% of the nominal load for another 25% of the time and with 100% of the nominal load for the rest of the time.

Fig. 8-1 **Efficiency vs. output current at 24V, typ**

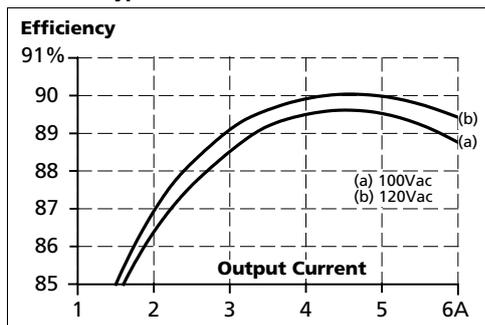


Fig. 8-2 **Losses vs. output current at 24V, typ.**

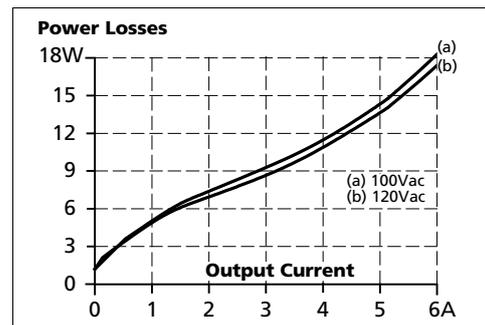


Fig. 8-3 **Efficiency vs. input voltage at 24V, 5A, typ.**


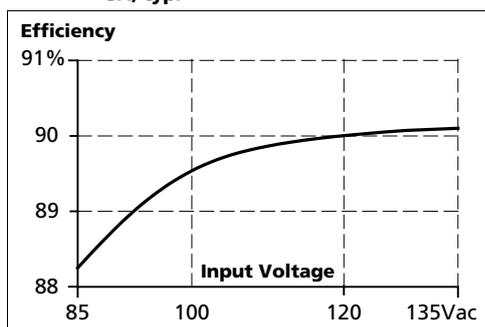


Fig. 8-4 **Losses vs. input voltage at 24V, 5A, typ.**

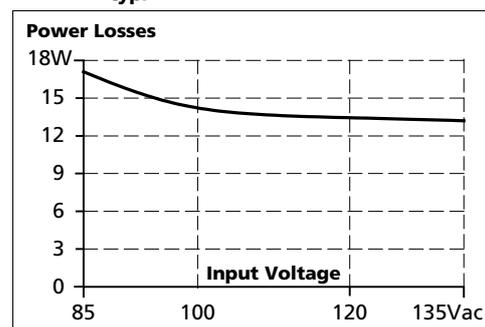


9. LIFETIME EXPECTANCY AND MTBF

| | AC 100V | AC 120V | |
|---|------------------------|------------------------|--|
| Lifetime expectancy ^{*)} | 135 000h ^{*)} | 128 000h | at 24V, 2.5A and 40°C |
| | 283 000h ^{*)} | 363 000h ^{*)} | at 24V, 2.5A and 25°C |
| | 52 000h | 58 000h | at 24V, 5A and 40°C |
| | 146 000h ^{*)} | 163 000h ^{*)} | at 24V, 5A and 25°C |
| | 27 000h | 34 000h | at 24V, 6A and 40°C |
| | 76 000h | 96 000h | at 24V, 6A and 25°C |
| MTBF ^{**) SN 29500, IEC 61709} | 720 000h | 740 000h | at 24V, 5A and 40°C |
| | 612 000h | 629 000h | at 24V, 6A and 40°C |
| | 1 246 000h | 1 280 000h | at 24V, 5A and 25°C |
| MTBF ^{**) MIL HDBK 217F} | 640 000h | 640 000h | at 24V, 5A and 40°C; Ground Benign GB40 |
| | 576 000h | 576 000h | at 24V, 6A and 40°C; Ground Benign GB40 |
| | 877 000h | 877 000h | at 24V, 5A and 25°C; Ground Benign GB25 |

*) The **Lifetime expectancy** shown in the table indicates the minimum operating hours (service life) and is determined by the lifetime expectancy of the built-in electrolytic capacitors. Lifetime expectancy is specified in operational hours and is calculated according to the capacitor's manufacturer specification. The manufacturer of the electrolytic capacitors only guarantees a maximum life of up to 15 years (131 400h). Any number exceeding this value is a calculated theoretical lifetime which can be used to compare devices.

) **MTBF stands for **Mean Time Between Failure**, which is calculated according to statistical device failures, and indicates reliability of a device. It is the statistical representation of the likelihood of a unit to fail and does not necessarily represent the life of a product. The MTBF figure is a statistical representation of the likelihood of a device to fail. A MTBF figure of e.g. 1 000 000h means that statistically one unit will fail every 100 000 hours if 10 000 units are installed in the field. However, it can not be determined if the failed unit has been running for 50 000h or only for 100h.

10. FUNCTIONAL DIAGRAM

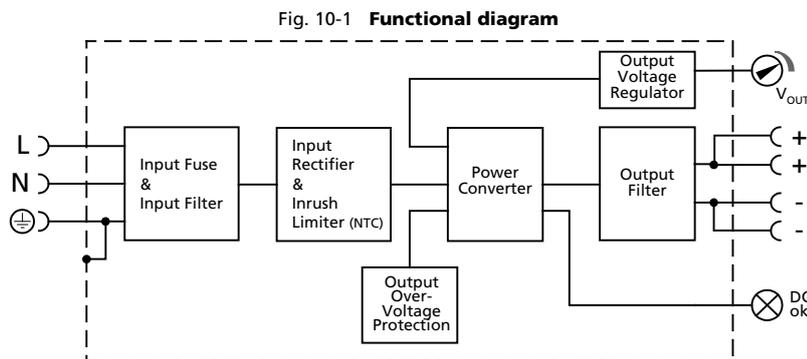

11. TERMINALS AND WIRING

The terminals are IP20 Finger safe constructed and suitable for field- and factory wiring.

| Type | Screw terminals |
|-------------------------------|----------------------------------|
| Solid wire | 0.5-6mm ² |
| Stranded wire | 0.5-4mm ² |
| American Wire Gauge | AWG20-10 |
| Max. wire diameter | 2.8mm (including ferrules) |
| Wire stripping length | 7mm / 0.28inch |
| Screwdriver | 3.5mm slotted or cross-head No 2 |
| Recommended tightening torque | 1Nm, 9lb.in |
| Pull-out force | according to UL 486E |

Instructions:

- a) Use appropriate copper cables that are designed for minimum operating temperatures of:
60°C for ambient up to 45°C and
75°C for ambient up to 60°C minimum
90°C for ambient up to 70°C minimum.
- b) Follow national installation codes and installation regulations!
- c) Ensure that all strands of a stranded wire enter the terminal connection!
- d) Do not use the unit without PE connection.
- e) Unused terminal compartments should be securely tightened.
- f) Ferrules are allowed.

12. FRONT SIDE AND USER ELEMENTS

Fig. 12-1 Front side



A Input Terminals(screw terminals)

- N, L** Line input
-  PE (Protective Earth) input

B Output Terminals (screw terminals, two pins per pole)

- +** Positive output
- Negative (return) output

C Output voltage potentiometer

Open the flap to adjust the output voltage. Factory set: 24.1V

D DC-OK LED (green)

On, when the voltage on the output terminals is >21V

13. EMC

The power supply is suitable for applications in industrial environment as well as in residential, commercial and light industry environment.

A detailed EMC report is available on request.

| EMC Immunity | According generic standards: EN 61000-6-1 and EN 61000-6-2 | | | |
|--------------------------|--|--|--|---|
| Electrostatic discharge | EN 61000-4-2 | contact discharge air discharge | 8kV 15kV | Criterion A Criterion A |
| Electromagnetic RF field | EN 61000-4-3 | 80MHz-2.7GHz | 10V/m | Criterion A |
| Fast transients (Burst) | EN 61000-4-4 | input lines output lines | 4kV 2kV | Criterion A Criterion A |
| Surge voltage on input | EN 61000-4-5 | L → N L → PE, N → PE | 2kV 4kV | Criterion A Criterion A |
| Surge voltage on output | EN 61000-4-5 | + → - + / - → PE | 500V 1kV | Criterion A Criterion A |
| Conducted disturbance | EN 61000-4-6 | 0.15-80MHz | 10V | Criterion A |
| Mains voltage dips | EN 61000-4-11 | 0% of 100Vac 40% of 100Vac 70% of 100Vac | 0Vac, 20ms 40Vac, 200ms 70Vac, 500ms | Criterion A Criterion C Criterion A |
| Voltage interruptions | EN 61000-4-11 | | 5000ms | Criterion C |
| Powerful transients | VDE 0160 | over entire load range | 375V, 1.3ms | Criterion A |

Criteria:

A: Power supply shows normal operation behavior within the defined limits.

B: Temporary voltage dips possible. No change in operation mode.

C: Temporary loss of function is possible. Power supply may shut-down and restarts by itself. No damage or hazards for the power supply will occur.

| EMC Emission | According generic standards: EN 61000-6-3, EN 61000-6-4 | |
|------------------------------------|---|---|
| Conducted emission input lines | EN 55011, EN 55032, FCC Part 15, CISPR 11, CISPR 32 | Class B |
| Conducted emission output lines**) | IEC/CISPR 16-1-2, IEC/CISPR 16-2-1 | limits for DC power port according EN 61000-6-3 not fulfilled |
| Radiated emission | EN 55011, EN 55032 | Class B |
| Harmonic input current | EN 61000-3-2 | not applicable (Input < 220Vac) |
| Voltage fluctuations, flicker | EN 61000-3-3 | fulfilled*) |

This device complies with FCC Part 15 rules.

Operation is subjected to following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

*) tested with constant current loads, non pulsing

**) for information only, not mandatory for EN 61000-6-3

| | | |
|----------------------------|------------------|--|
| Switching frequency | 175kHz to 225kHz | Main converter, input voltage dependent at 24V, 2.5A |
| | 100kHz to 130kHz | Main converter, input voltage dependent at 24V, 5A |

14. ENVIRONMENT

| | | |
|---------------------------------------|--|---|
| Operational temperature ^{*)} | -10°C to +70°C (14°F to 158°F) | reduce output power according Fig. 14-1 |
| Storage temperature | -40°C to +85°C (-40°F to 185°F) | for storage and transportation |
| Output de-rating | 1.6W/°C 3W/°C | 45°C to 60°C (113°F to 140°F) 60°C to 70°C (140°F to 158°F) |
| Humidity ^{**)} | 5 to 95% r.h. | IEC 60068-2-30 |
| Vibration sinusoidal | 2-17.8Hz: ±1.6mm; 17.8-500Hz: 2g ^{***)} 2 hours / axis ^{***)} | IEC 60068-2-6 |
| Shock | 30g 6ms, 20g 11ms ^{***)} 3 bumps / direction, 18 bumps in total | IEC 60068-2-27 |
| Altitude | 0 to 2000m (0 to 6 560ft) 2000 to 6000m (6 560 to 20 000ft) | without any restrictions reduce output power or ambient temperature, see Fig. 14-2 IEC 62103, EN 50178, overvoltage category II |
| Altitude de-rating | 7.5W/1000m or 5°C/1000m | > 2000m (6500ft), see Fig. 14-2 |
| Over-voltage category | III II | IEC 62103, EN 50178, altitudes up to 2000m altitudes from 2000m to 6000m |
| Degree of pollution | 2 | IEC 62103, EN 50178, not conductive |

*) Operational temperature is the same as the ambient or surrounding temperature and is defined as the air temperature 2cm below the unit.
 **) Do not energize while condensation is present
 ***) Tested in combination with DIN-Rails according to EN 60715 with a height of 15mm and a thickness of 1.3mm and standard orientation.

Fig. 14-1 **Output current vs. ambient temp.**


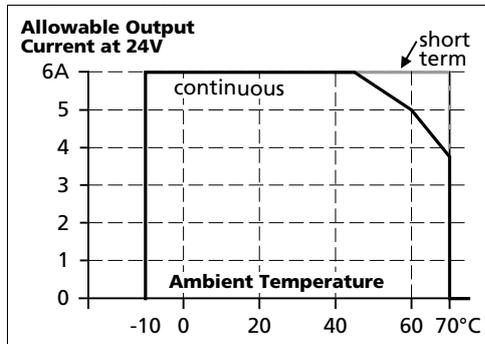


Fig. 14-2 **Output current vs. altitude**

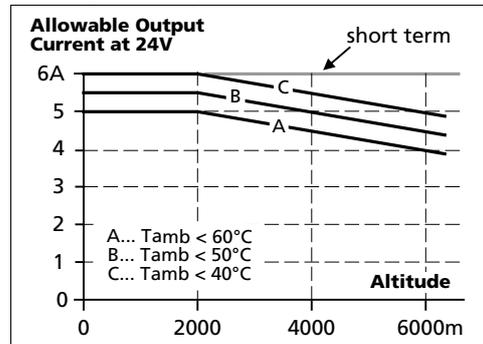

15. PROTECTION FEATURES

| | | |
|--------------------------------|---|---|
| Output protection | Electronically protected against overload, no-load and short-circuits ^{*)} | |
| Output over-voltage protection | typ. 35Vdc max. 39Vdc | In case of an internal power supply defect, a redundant circuit limits the maximum output voltage. The output shuts down and automatically attempts to restart. |
| Degree of protection | IP 20 | EN/IEC 60529 Caution: For use in a controlled environment according to CSA 22.2 No 107.1-01. |
| Penetration protection | > 3.5mm | e.g. screws, small parts |
| Over-temperature protection | yes | Output shut-down with automatic restart |
| Input transient protection | MOV (Metal Oxide Varistor) | |
| Internal input fuse | included | not user replaceable |

*) In case of a protection event, audible noise may occur.


16. SAFETY FEATURES

| | | |
|---|--|--|
| Input / output separation ^{*)} | SELV PELV double or reinforced insulation | IEC/EN 60950-1 IEC/EN 60204-1, EN 50178, IEC 62103, IEC 60364-4-41 |
| Class of protection | I | PE (Protective Earth) connection required |
| Isolation resistance | > 5MΩ | input to output, 500Vdc |
| PE resistance | < 0.1Ω | between housing and PE terminal |
| Touch current (leakage current) | typ. 0.24mA / 0.58mA typ. 0.35mA / 0.80mA max. 0.36mA / 0.67mA max. 0.53mA / 0.96mA | 100Vac, 50Hz, TN-,TT-mains / IT-mains 120Vac, 60Hz, TN-,TT-mains / IT-mains 110Vac, 50Hz, TN-,TT-mains / IT-mains 132Vac, 60Hz, TN-,TT-mains / IT-mains |

17. DIELECTRIC STRENGTH

The output voltage is floating and has no ohmic connection to the ground. Type and factory tests are conducted by the manufacturer. Field tests may be conducted in the field using the appropriate test equipment which applies the voltage with a slow ramp (2s up and 2s down). Connect all input-terminals together as well as all output poles before conducting the test. When testing, set the cut-off current settings to the value in the table below.

Fig. 17-1 Dielectric strength

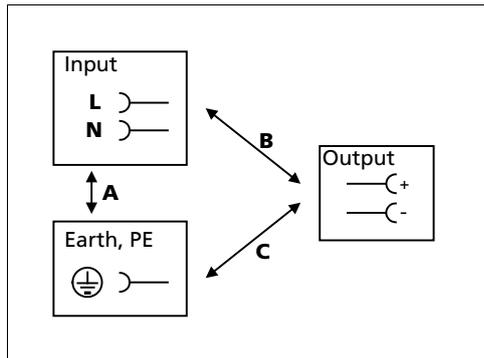

| | | A | B | C |
|-------------------------|-----|---------|---------|--------|
| Type test | 60s | 2500Vac | 3000Vac | 500Vac |
| Factory test | 5s | 2500Vac | 2500Vac | 500Vac |
| Field test | 5s | 2000Vac | 2000Vac | 500Vac |
| Cut-off current setting | | > 10mA | > 10mA | > 20mA |

To fulfil the PELV requirements according to EN60204-1 § 6.4.1, we recommend that either the + pole, the – pole or any other part of the output circuit shall be connected to the protective earth system. This helps to avoid situations in which a load starts unexpectedly or can not be switched off when unnoticed earth faults occur.

18. APPROVALS AND FULFILLED STANDARD

| | | |
|-----------------|---|--|
| UL 508 |  | UL Certificate Listed equipment for category NMTR - Industrial Control Equipment Applicable for US and Canada E-File: E198865 |
| IEC 60950-1 |  | CB Scheme Certificate General safety requirements for Information Technology Equipment (ITE) |
| UL 60950-1 |  | UL Certificate Recognized component for category QQQQ - Information Technology Equipment (ITE) Applicable for US and Canada E-File: E137006 |
| Class I Div 2 |  | CSA Certificate Power Supplies for Hazardous Location Applicable for Canada and US CSA Class: 5318-01 (Canada), 5318-81 (USA) Temperature Code: T3 Groups: A, B, C and D |
| Marine (DNV GL) |  | DNV-GL Certificate DNV-GL Type approved product Certificate: TAA00001ST Temperature: Class B Humidity: Class B Vibration: Class C EMC: Class A Enclosure: Class A |
| Marine (ABS) |  | ABS Design Assessment Certificate ABS (American Bureau of Shipment) assessed product Certificate: 17-HG1599236-PDA |
| ISA-71.04-1985 |  | Manufacturer's Declaration (Online Document) Airborne Contaminants Corrosion Test Severity Level: G3 Harsh H2S: 100ppb NOx: 1250ppb Cl2: 20ppb SO2: 300ppb Test Duration: 3 weeks, which simulates a service life of at least 10 years. |
| VDMA 24364 |  | Paint Wetting Impairment Substances Test (or LABS-Test) Tested for Zone 2 and test class C1 according to VDMA 24364-C1-L/W for solvents and water-based paints |

19. REGULATORY COMPLIANCE

EU Declaration of
Conformity



The CE mark indicates conformance with the
- EMC directive
- Low-voltage directive (LVD)
- RoHS directive

REACH Directive



Manufacturer's Statement
EU-Directive regarding the Registration, Evaluation,
Authorisation and Restriction of Chemicals

EAC TR Registration



EAC Certificate
EAC EurAsian Conformity - Registration Russia, Kazakhstan
and Belarus
8504408200, 8504409000

20. PHYSICAL DIMENSIONS AND WEIGHT

| | |
|-------------------------|--|
| Width | 32mm 1.26" |
| Height | 124mm 4.88" |
| Depth | 117mm 4.61" The DIN-rail height must be added to the unit depth to calculate the total required installation depth. |
| Weight | 500g / 1.1lb |
| DIN-Rail | Use 35mm DIN-rails according to EN 60715 or EN 50022 with a height of 7.5 or 15mm. |
| Housing material | Body: Aluminium alloy Cover: zinc-plated steel |
| Installation clearances | See chapter 2 |

Fig. 20-1 **Front view**


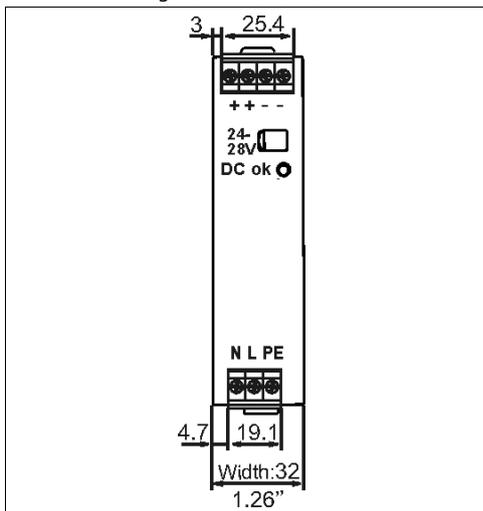




Fig. 20-2 **Side view**

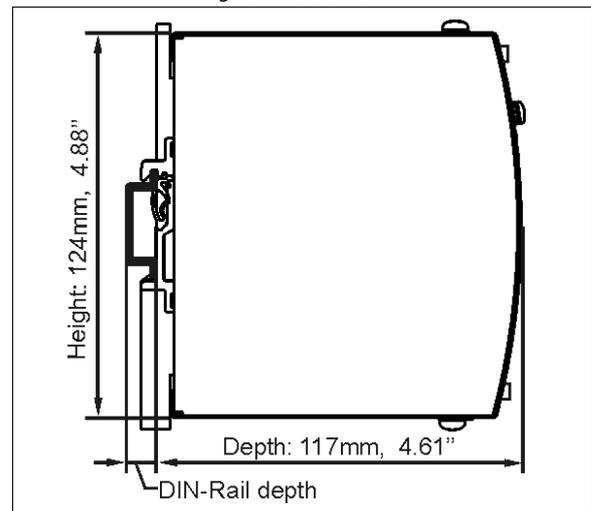

21. ACCESSORIES

21.1. ZM1.WALL - WALL MOUNTING BRACKET


This bracket is used to mount the power supply onto a flat surface without utilizing a DIN-Rail.

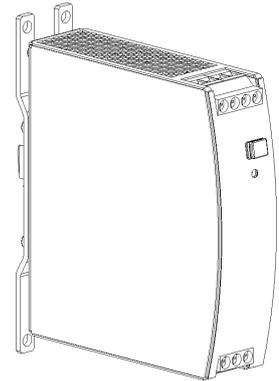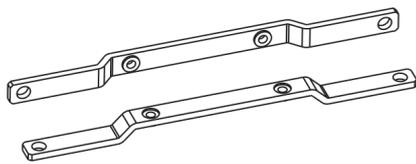


21.2. ZM13.SIDE - SIDE MOUNTING BRACKET

This bracket is used to mount Dimension units sideways with or without utilizing a DIN-Rail. The two aluminum brackets and the black plastic slider of the unit must be detached so that the steel brackets can be installed.

For sideways DIN-rail mounting, the removed aluminum brackets and the black plastic slider need to be mounted on the steel bracket.

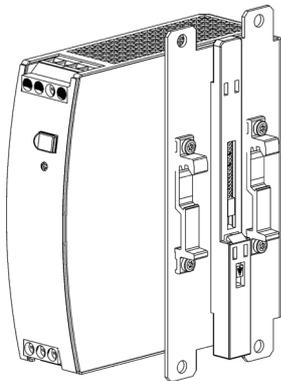

Side mounting with DIN-rail brackets

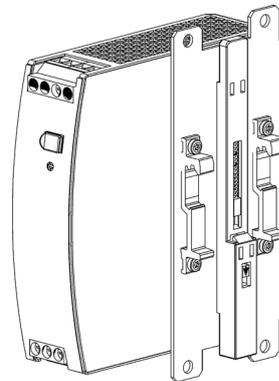

Side mounting without DIN-rail brackets

21.3. REDUNDANCY MODULES

YRM2.DIODE – (2x 10A Inputs, 1x 20A output)




The YRM2.DIODE is a dual redundancy module, which can be used to build redundant systems. It is equipped with two input channels, which are individually decoupled by utilizing diodes.

The YRM2.DIODE does not require an additional auxiliary voltage and is self-powered even in case of a short circuit across the output.

The YRM2.DIODE has a monitoring circuit included and is the perfect solution when the power supply has no DC-OK function. Two LEDs and two relay contacts signal when one of the two DC-input voltages is not in range due to a non-functioning or disconnected power supply.

Due to the compact design, the unit is very slender and only requires 32mm width on the DIN-rail.

Fig. 21-1 **Typical 1+1 Redundant configuration for 5A load current**

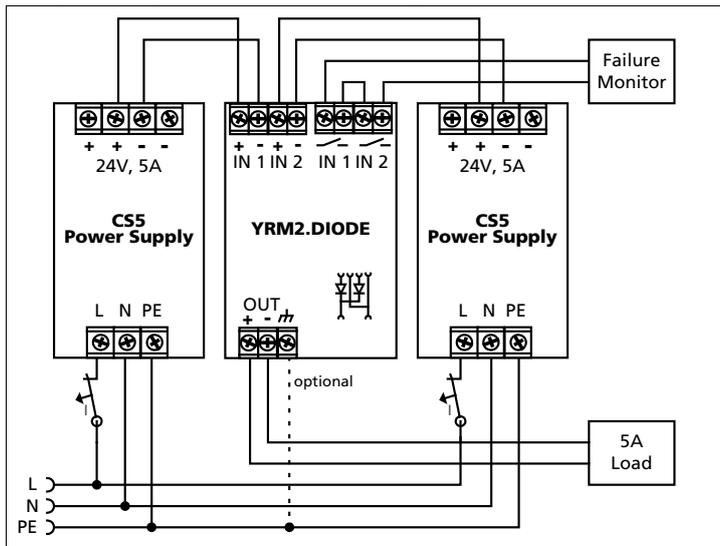

22. APPLICATION NOTES


22.1. PEAK CURRENT CAPABILITY

The unit can deliver peak currents (up to several milliseconds) which are higher than the specified short term currents. This helps to start current demanding loads. Solenoids, contactors and pneumatic modules often have a steady state coil and a pick-up coil. The inrush current demand of the pick-up coil is several times higher than the steady-state current and usually exceeds the nominal output current (including the PowerBoost). The same situation applies when starting a capacitive load.

The peak current capability also ensures the safe operation of subsequent circuit breakers of load circuits. The load branches are often individually protected with circuit breakers or fuses. In case of a short or an overload in one branch circuit, the fuse or circuit breaker need a certain amount of over-current to open in a timely manner. This avoids voltage loss in adjacent circuits.


The extra current (peak current) is supplied by the power converter and the built-in large sized output capacitors of the power supply. The capacitors get discharged during such an event, which causes a voltage dip on the output. The following two examples show typical voltage dips:

Fig. 22-1 **Peak load with 2x the nominal current for 50ms, typ.**

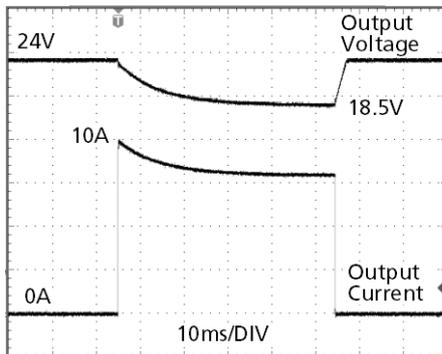

10A Peak load (resistive) for 50ms
Output voltage dips from 24V to 18.5V.

Fig. 22-2 **Peak load with 5x the nominal current for 5ms, typ.**

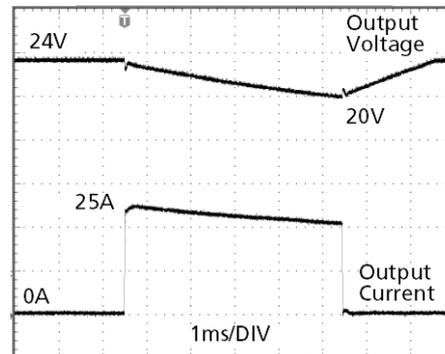

25A Peak load (resistive) for 5ms
Output voltage dips from 24V to 20V.

| | | | |
|---------------------------|------|-------------------|---------------------------------|
| Peak current voltage dips | typ. | from 24V to 18.5V | at 10A for 50ms, resistive load |
| | typ. | from 24V to 22V | at 25A for 2ms, resistive load |
| | typ. | from 24V to 20V | at 25A for 5ms, resistive load |

22.2. BACK-FEEDING LOADS

Loads such as decelerating motors and inductors can feed voltage back to the power supply. This feature is also called return voltage immunity or resistance against Back- E.M.F. (Electro Magnetic Force).

This power supply is resistant and does not show malfunctioning when a load feeds back voltage to the power supply. It does not matter whether the power supply is on or off.

The maximum allowed feed-back-voltage is 35Vdc. The absorbing energy can be calculated according to the built-in large sized output capacitor which is specified in chapter 6.

22.3. EXTERNAL INPUT PROTECTION

The unit is tested and approved for branch circuits up to 20A. An external protection is only required if the supplying branch has an ampacity greater than this. Check also local codes and local requirements. In some countries local regulations might apply.

If an external fuse is necessary or utilized, minimum requirements need to be considered to avoid nuisance tripping of the circuit breaker. A minimum value of 16A B- or 10A C-Characteristic breaker should be used.

22.4. PARALLEL USE TO INCREASE OUTPUT POWER

The power supply shall not be used in parallel to increase the output current.

22.5. PARALLEL USE FOR REDUNDANCY

Power supplies can be paralleled for redundancy to gain higher system availability. Redundant systems require a certain amount of extra power to support the load in case one power supply unit fails. The simplest way is to put two power supplies in parallel. This is called a 1+1 redundancy. In case one power supply unit fails, the other one is automatically able to support the load current without any interruption, see also chapter 22.4.

Please note: This simple way to build a redundant system does not cover failures such as an internal short circuit in the secondary side of the power supply. In such a case, the defective unit becomes a load for the other power supplies and the output voltage can no longer be maintained. This can be avoided by utilizing redundancy modules, which have decoupling devices (diodes or MOSFETs) included. Further information and wiring configurations can be found in chapter 21.3.

Recommendations for building redundant power systems:

- a) Use separate input fuses for each power supply.
- b) Monitor the individual power supply units.
Therefore, use the DC-OK relay contact of the YRM2.DIODE.
- c) It is desirable to set the output voltages of all units to the same value ($\pm 100\text{mV}$) or leave it at the factory setting.

22.6. SERIES OPERATION


Power supplies of the same type can be connected in series for higher output voltages. It is possible to connect as many units in series as needed, providing the sum of the output voltage does not exceed 150Vdc. Voltages with a potential above 60Vdc are no longer SELV and can be dangerous. Such voltages must be installed with a protection against touching.

Earthing of the output is required when the sum of the output voltage is above 60Vdc.

Avoid return voltage (e.g. from a decelerating motor or battery) which is applied to the output terminals.

Keep an installation clearance of 15mm (left / right) between two power supplies and avoid installing the power supplies on top of each other. Do not use power supplies in series in mounting orientations other than the standard mounting orientation (input terminals on bottom of the unit).

Pay attention that leakage current, EMI, inrush current, harmonics will increase when using multiple power supplies.

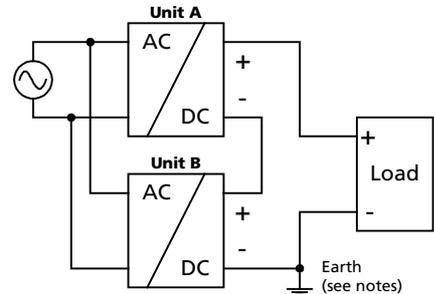

22.7. INDUCTIVE AND CAPACITIVE LOADS

The unit is designed to supply any kind of loads, including capacitive and inductive loads.

22.8. CHARGING OF BATTERIES

The power supply shall not be used to charge batteries. Choose power supplies of the QS-Series for charging batteries.

22.9. USE IN A TIGHTLY SEALED ENCLOSURE

When the power supply is installed in a tightly sealed enclosure, the temperature inside the enclosure will be higher than outside. In such situations, the inside temperature defines the ambient temperature for the power supply.

The following measurement results can be used as a reference to estimate the temperature rise inside the enclosure.

The power supply is placed in the middle of the box, no other heat producing items are inside the box

| | |
|--------------------------------|---|
| Enclosure: | Rittal Typ IP66 Box PK 9516 100, plastic, 110x180x165mm |
| Load: | 24V, 4A; (=80%) load is placed outside the box |
| Input: | 230Vac |
| Temperature inside enclosure: | 46.3°C (in the middle of the right side of the power supply with a distance of 2cm) |
| Temperature outside enclosure: | 23.3°C |
| Temperature rise: | 23.0K |

22.10. MOUNTING ORIENTATIONS

Mounting orientations other than the input terminals on the bottom require a reduction in continuous output power or a limitation in the maximum allowed ambient temperature. The amount of reduction influences the lifetime expectancy of the power supply. Therefore, two different derating curves for continuous operation can be found below:

Curve A1

Recommended output current.

Curve A2

Max allowed output current (results in approximately half the lifetime expectancy of A1).

Fig. 22-3
Mounting Orientation A
(Standard orientation)

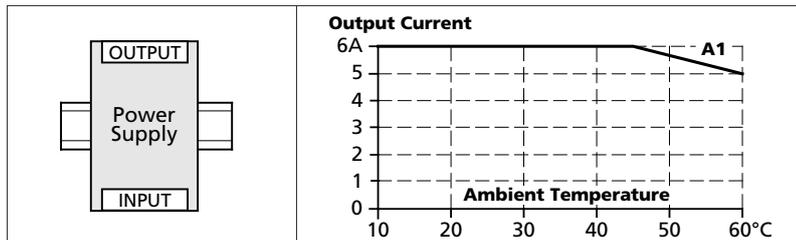


Fig. 22-4
Mounting Orientation B
(Upside down)

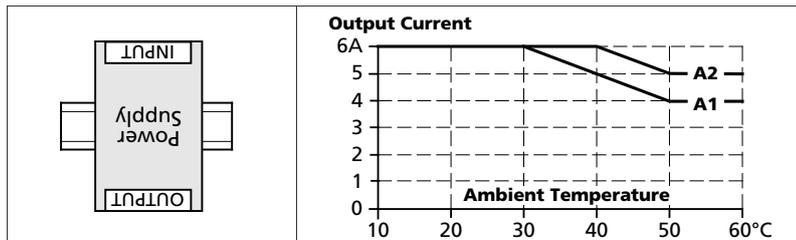


Fig. 22-5
Mounting Orientation C
(Table-top mounting)

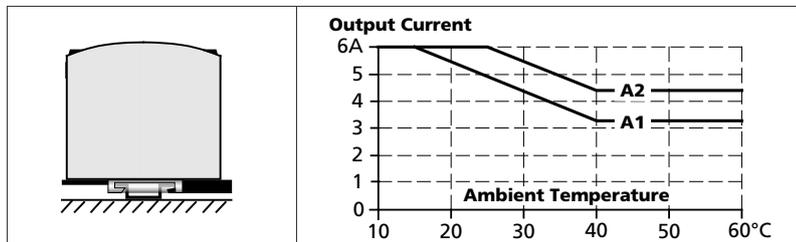


Fig. 22-6
Mounting Orientation D
(Horizontal cw)

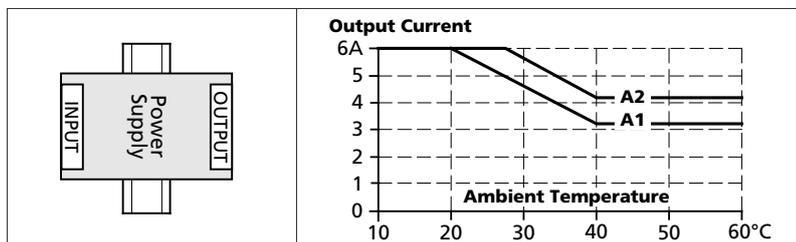


Fig. 22-7
Mounting Orientation E
(Horizontal ccw)

