

## Operational Amplifier

### Features

- 4V to 32V Operation
- Small Footprint Package
- Unity Gain Stable
- 2.5 MHz Unity Gain Bandwidth
- Rail-to-Rail Output
- 6 V/ $\mu$ s Typical Slew Rate
- Short Circuit Protected

### Applications

- Analog Blocks
- Data Acquisition
- Sensor Interface
- Portable Instrumentation
- Active Filtering

### General Description


The MIC6211 op amp is a general-purpose, high performance, single- or split-supply, operational amplifier in a space-saving, surface-mount package.

The MIC6211 operates from 4V to 32V, single or differential (split) supply. The input common-mode range includes ground. The device features a 2.5 MHz unity gain bandwidth, 6 V/ $\mu$ s slew rate, and is internally unity-gain compensated.

Inputs are protected against reverse polarity (input voltage less than  $V^-$ ) and ESD (electrostatic discharge). Output is current-limited for both sourcing and sinking. Output short-circuits of unlimited duration are allowed, provided the power dissipation specification is not exceeded.


The MIC6211 is available in the tiny, 5-lead SOT-23-5 surface-mount package.

### Package Type

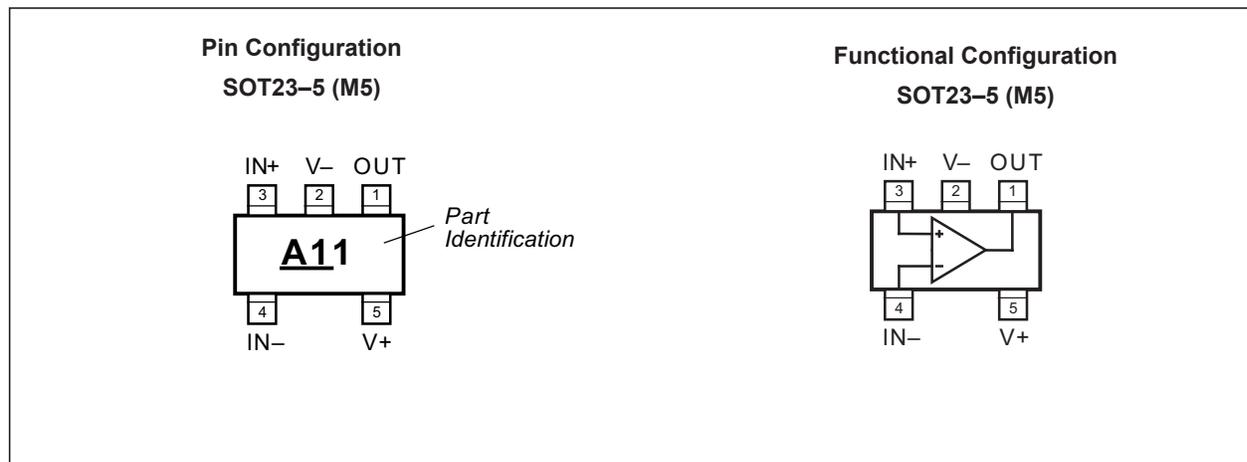

# MIC6211

## Functional Diagram

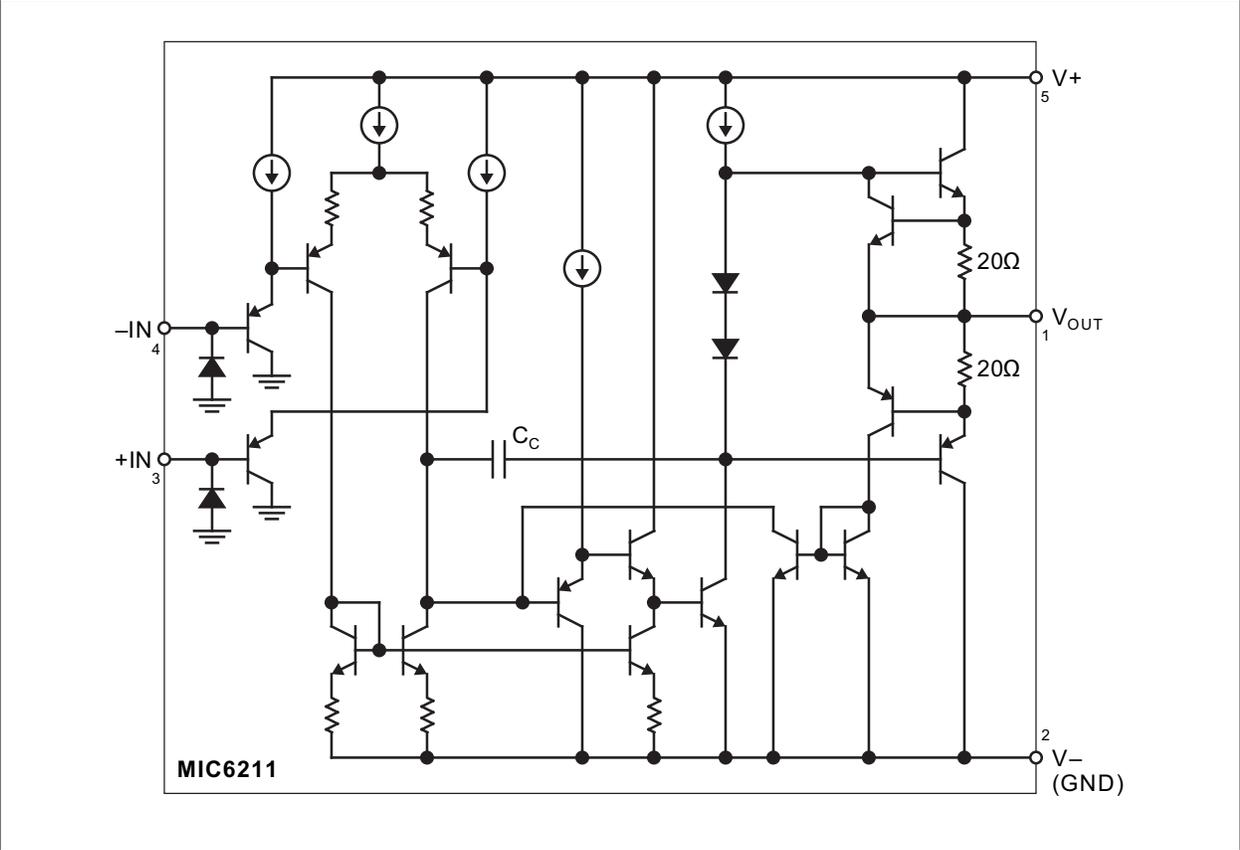

## 1.0 ELECTRICAL CHARACTERISTICS

### Absolute Maximum Ratings †

|  |                                 |
|--|---------------------------------|
| Supply Voltage ( $V_{V+}$ to $V_{V-}$ ).....               | 36V or $\pm 18$ V               |
| Differential Input Voltage ( $V_{IN+}$ to $V_{IN-}$ )..... | $\pm 36$ V                      |
| Input Voltage ( $V_{IN+}$ , $V_{IN-}$ ).....               | ( $V_{V-} - 0.3$ V) to $V_{V+}$ |
| Output Short-Circuit Current Duration.....                 | Indefinite                      |

### Operating Ratings ‡

|                                      |             |
|--------------------------------------|-------------|
| Supply Voltage ( $V+$ to $V-$ )..... | +4V to +32V |
|--------------------------------------|-------------|

† **Notice:** Stresses above those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at those or any other conditions above those indicated in the operational sections of this specification is not intended. Exposure to maximum rating conditions for extended periods may affect device reliability.

‡ **Notice:** The device is not guaranteed to function outside the operating ratings.

# MIC6211

## ELECTRICAL CHARACTERISTICS (DIFFERENTIAL SUPPLY)

| Electrical Characteristics: $V_+ = +15V$ , $V_- = -15V$ , $V_{CM} = 0V$ ; $R_L = 2\text{ k}\Omega$ ; $T_A = 25^\circ\text{C}$ , $T_A = T_J$ ; unless otherwise noted. |            |                |                |      |                              |                               |
|---|------------|----------------|----------------|------|------------------------------|-------------------------------|
| Parameters  | Symbol     | Min.           | Typ.           | Max. | Units                        | Conditions                    |
| Input Offset Voltage  | $V_{OS}$   | —              | 2              | 7    | mV                           | —                             |
| Average Input Offset Drift  | $TCV_{OS}$ | —              | 7              | —    | $\mu\text{V}/^\circ\text{C}$ | (Note 1)                      |
| Input Bias Current  | $I_B$      | —              | 50             | 250  | nA                           | —                             |
| Input Offset Current  | $I_{OS}$   | —              | 8              | 30   | nA                           | —                             |
| Input Voltage Range   | $V_{CM}$   | +13.5<br>-15.0 | +13.8<br>-15.3 | —    | V                            | —                             |
| Common-Mode Rejection Ratio   | CMRR       | 65             | 100            | —    | dB                           | $V_{CM} = +13.5V, -15.0V$     |
| Power Supply Rejection Ratio  | PSRR       | 65             | 110            | —    | dB                           | $V_S = \pm 2.5V$ to $\pm 15V$ |
| Large-Signal Voltage Gain   | $A_{VOL}$  | 25             | 180            | —    | V/mV                         | $V_O = \pm 10V$               |
| Maximum Output Voltage Swing  | $V_{OUT}$  | $\pm 12.5$     | $\pm 14$       | —    | V                            | —                             |
| Bandwidth   | $B_W$      | —              | 2.5            | —    | MHz                          | —                             |
| Slew Rate   | $S_R$      | —              | 6              | —    | V/ $\mu\text{s}$             | —                             |
| Short-Circuit Output Current  | $I_{SC}$   | 30             | 50             | —    | mA                           | Sourcing or Sinking           |
| Supply Current  | $I_S$      | —              | 1.3            | 2.0  | mA                           | —                             |

**Note 1:** Not production tested.

## ELECTRICAL CHARACTERISTICS (SINGLE SUPPLY)

| Electrical Characteristics: $V_+ = +5V$ , $V_- = 0V$ , $V_{CM} = 0.1V$ ; $T_A = 25^\circ C$ , $T_A = T_J$ ; unless otherwise noted. |            |           |      |      |                  |   |
|---|------------|-----------|------|------|------------------|---|
| Parameters  | Symbol     | Min.      | Typ. | Max. | Units            | Conditions  |
| Input Offset Voltage  | $V_{OS}$   | —         | 2    | 7    | mV               | —   |
| Average Input Offset Drift  | $TCV_{OS}$ | —         | 7    | —    | $\mu V/^\circ C$ | (Note 1)  |
| Input Bias Current  | $I_B$      | —         | 65   | 250  | nA               | —   |
| Input Offset Current  | $I_{OS}$   | —         | 8    | 30   | nA               | —   |
| Input Voltage Range   | $V_{CM}$   | +3.5      | +3.7 | —    | V                |   |
|   |            | 0         | -0.3 |      |                  |   |
| Common-Mode Rejection Ratio   | CMRR       | 45        | 70   | —    | dB               | $V_{CM} = 0V$ to $3.5V$                           |
| Power Supply Rejection Ratio  | PSRR       | 65        | 105  | —    | dB               | $V_S = \pm 2.5V$ to $\pm 15V$                     |
| Large-Signal Voltage Gain   | $A_{VOL}$  | 15        | 170  | —    | V/mV             | $V_O = 1.5V$ to $3.5V$ , $R_L = 2\text{ k}\Omega$ |
| Maximum Output Voltage Swing  | $V_{OUT}$  | $\pm 3.8$ | +4.0 | —    | V                | $R_L = 10\text{ k}\Omega$ to GND                  |
|   |            |           | +1.0 | +1.2 |                  | $R_L = 10\text{ k}\Omega$ to +5V                  |
| Short-Circuit Output Current  | $I_{SC}$   | 20        | 40   | —    | mA               | Sourcing or Sinking                               |
| Supply Current  | $I_S$      | —         | 1.2  | 1.8  | mA               | —   |

**Note 1:** Not production tested.

# MIC6211

---


## TEMPERATURE SPECIFICATIONS (Note 1)

| Parameters                        | Symbol        | Min. | Typ. | Max. | Units | Conditions     |
|-----------------------------------|---------------|------|------|------|-------|----------------|
| <b>Temperature Ranges</b>         |               |      |      |      |       |                |
| Ambient Temperature Range         | $T_A$         | -40  | —    | +85  | °C    | —              |
| <b>Package Thermal Resistance</b> |               |      |      |      |       |                |
| Thermal Resistance SOT-23-5       | $\theta_{JA}$ | —    | 200  | —    | °C/W  | Mounted to PCB |


**Note 1:** The maximum allowable power dissipation is a function of ambient temperature, the maximum allowable junction temperature and the thermal resistance from junction to air (i.e.,  $T_A$ ,  $T_J$ ,  $\theta_{JA}$ ). Exceeding the maximum allowable power dissipation will cause the device operating junction temperature to exceed the maximum +85°C rating. Sustained junction temperatures above +85°C can impact the device reliability.

## 2.0 TYPICAL PERFORMANCE CURVES


**Note:** The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only. The performance characteristics listed herein are not tested or guaranteed. In some graphs or tables, the data presented may be outside the specified operating range (e.g., outside specified power supply range) and therefore outside the warranted range.

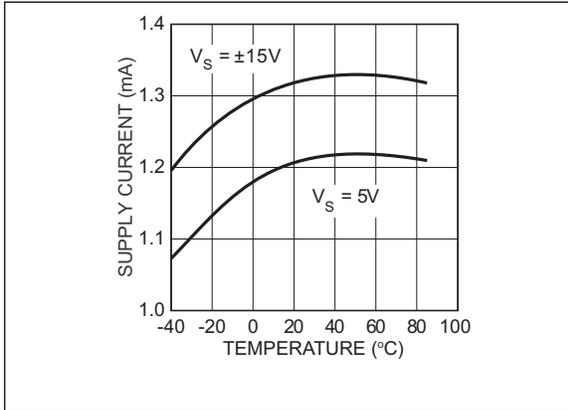


**FIGURE 2-1:** Supply Current vs. Temperature.

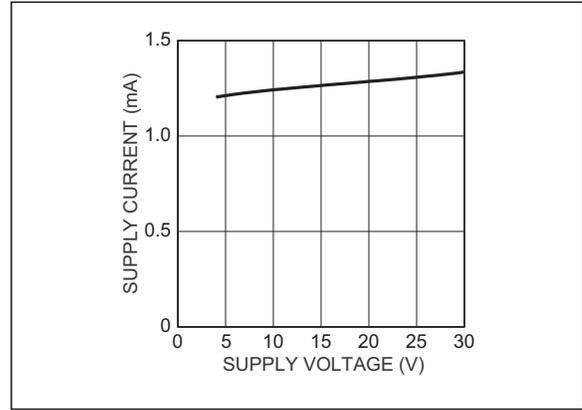


**FIGURE 2-4:** Supply Current vs. Supply Voltage.

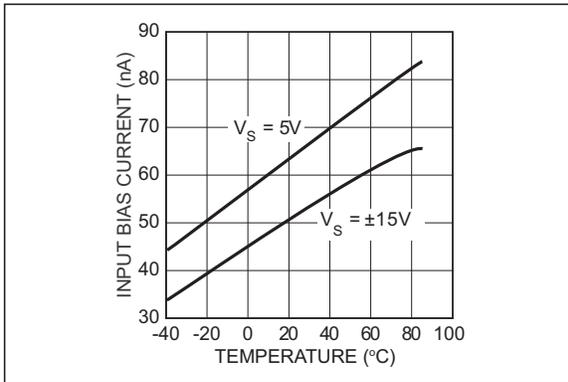


**FIGURE 2-2:** Input Bias Current vs. Temperature.

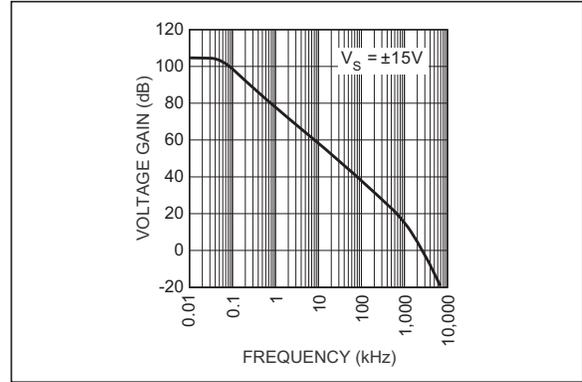

**FIGURE 2-5:** Voltage Gain vs. Frequency.

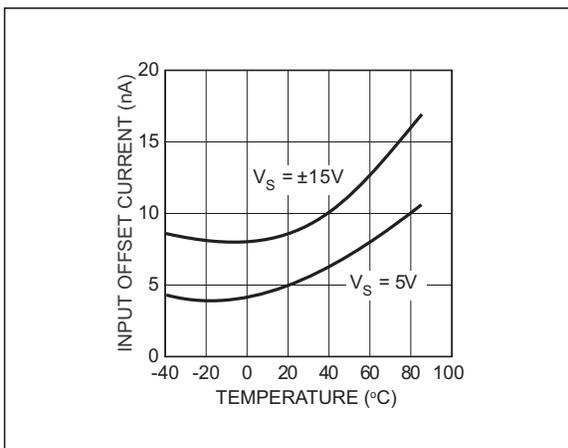


**FIGURE 2-3:** Input Offset Current vs. Temperature.

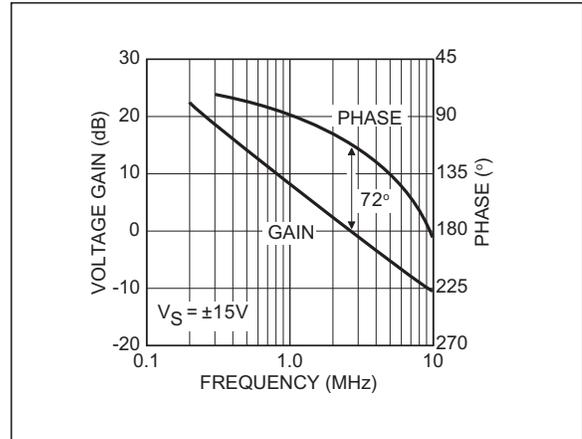


**FIGURE 2-6:** Gain and Phase vs. Frequency.


# MIC6211

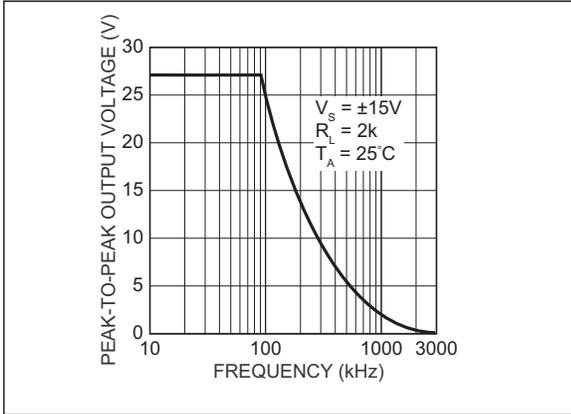


**FIGURE 2-7:** Large-Signal Frequency Response.

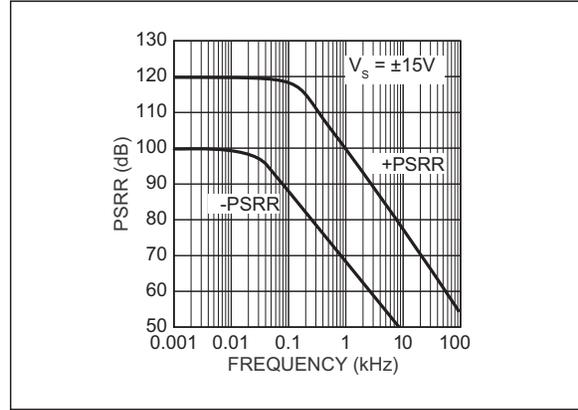


**FIGURE 2-9:** Power Supply Rejection Ratio vs. Frequency.

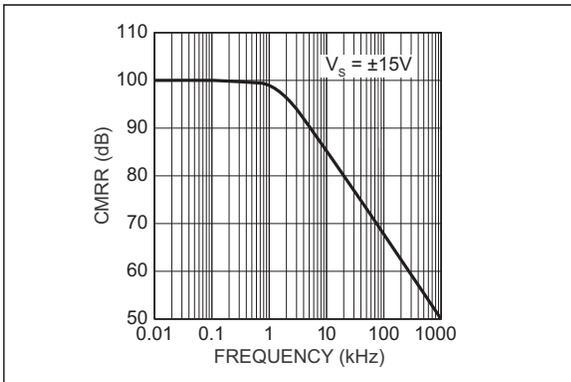


**FIGURE 2-8:** Common Mode Rejection Ratio vs. Frequency.

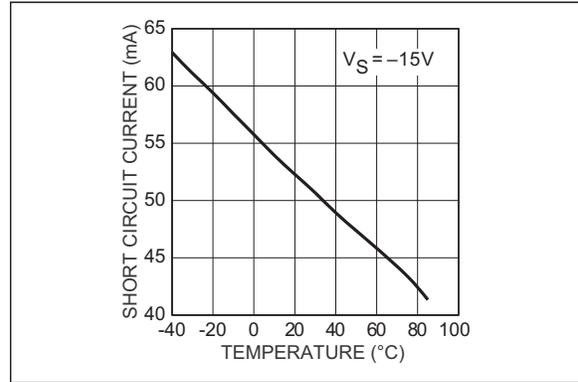


**FIGURE 2-10:** Short-Circuit Current vs. Temperature.

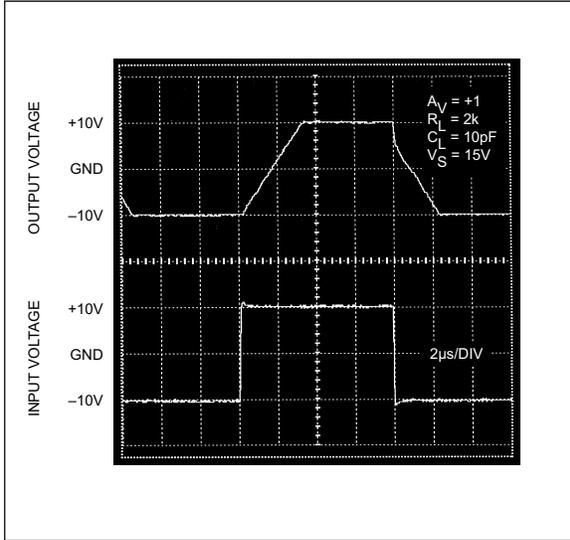


**FIGURE 2-11:** Large-Signal Transient Response.

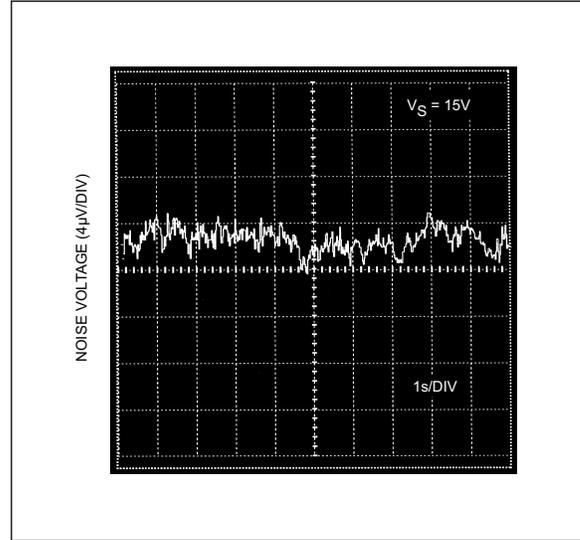

**FIGURE 2-13:** 0.1 Hz to 10 Hz Noise.

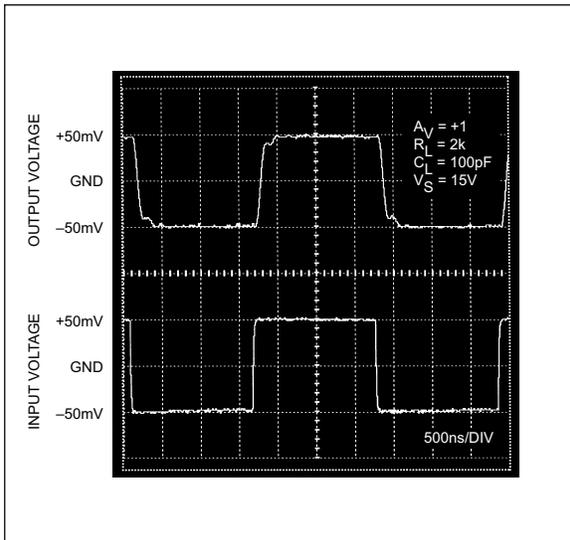

**FIGURE 2-12:** Small-Signal Transient Response.

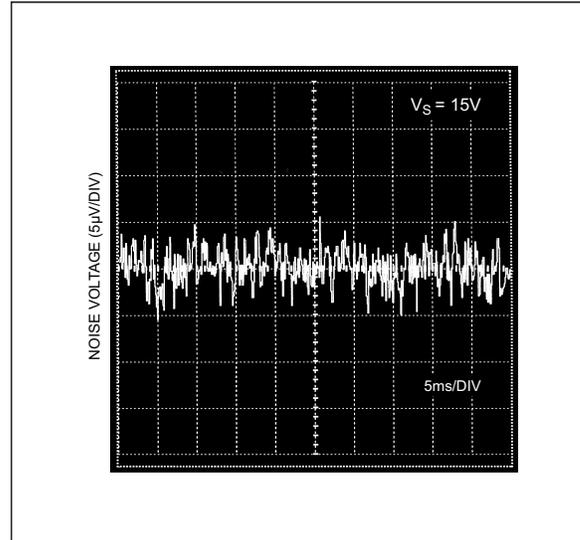

**FIGURE 2-14:** Wideband Noise.

# MIC6211

---

## 3.0 PIN DESCRIPTIONS

The descriptions of the pins are listed in [Table 3-1](#).

**TABLE 3-1: PIN FUNCTION TABLE**

| Pin Number | Symbol | Description  |
|------------|--------|--|
| 1          | OUT    | Amplifier Output.  |
| 2          | V-     | Negative Supply. Negative supply for split supply application or ground for single supply application. |
| 3          | IN+    | Non-Inverting Input.   |
| 4          | IN-    | Inverting Input.   |
| 5          | V+     | Positive Supply.   |

## 4.0 APPLICATION INFORMATION

### 4.1 Common-Mode Range and Output Voltage

The input common-mode range of the MIC6211 is from the negative supply voltage to 1.2V below the positive supply voltage. The output voltage swings within 1V of the positive and negative supply voltage.

### 4.2 Voltage Buffer

Figure 4-1 shows a standard voltage follower/buffer. The output voltage equals the input voltage. This circuit is used to buffer a high impedance signal source. This circuit works equally well with single or split supplies.

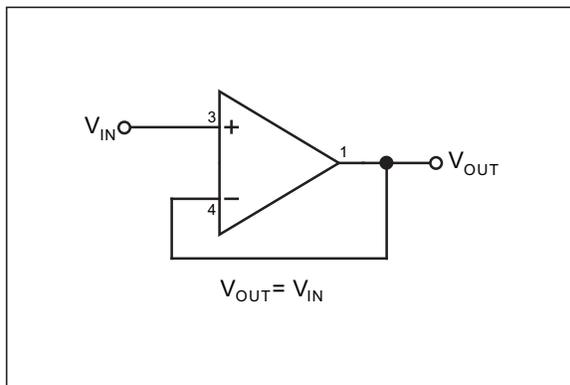


FIGURE 4-1: Voltage Buffer.

### 4.3 Inverting Amplifier

Figure 4-2 shows an inverting amplifier with its gain set by the ratio of two resistors. This circuit works best with split supplies, but will perform with single supply systems if the non-inverting input (+ input) is biased up above ground.

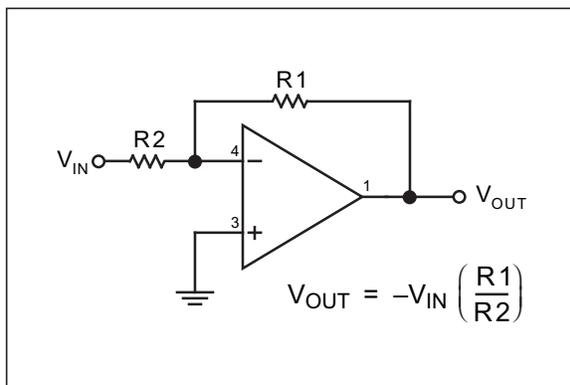


FIGURE 4-2: Inverting Amplifier.

### 4.4 Voltage Controlled Current Sink

Figure 4-3 is a voltage controlled current sink. A buffer transistor forces current through a programming resistor until the feedback loop is satisfied. Current flow is  $V_{IN}/R$ . This circuit works with single or split supplies.

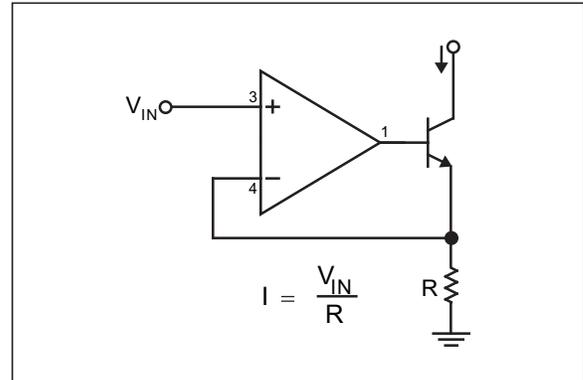


FIGURE 4-3: Voltage Controlled Current Sink.

### 4.5 High-Pass Filter

Figure 4-4 is an active filter with 20 dB (10x) gain and a low frequency cutoff of 10 Hz. The high gain-bandwidth of the MIC6211 allows operation beyond 100 kHz. This filter configuration is designed for split supplies.


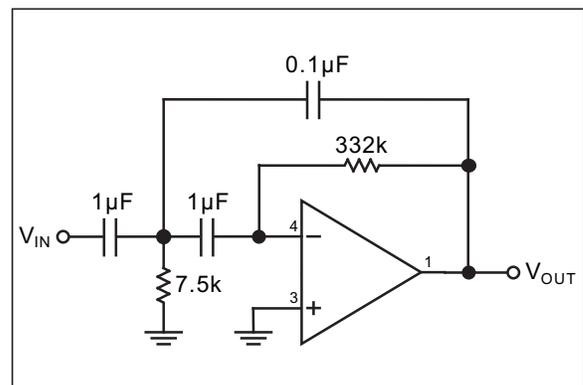



FIGURE 4-4: High-Pass Filter.

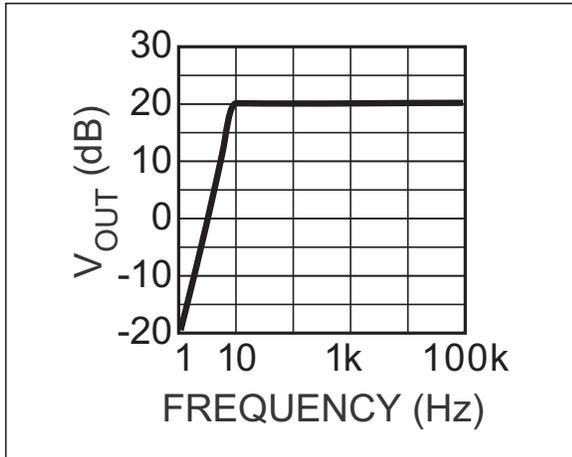

**FIGURE 4-5:** High-Pass Filter Response.

## 4.6 Summing Amplifier


Figure 4-5 is a single supply summing amplifier. In this configuration, the output voltage is the sum of V1 and V2, minus the sum of V3 and V4. By adding more resistors to either the inverting or non-inverting input, more voltages may be summed. This single supply version has one important restriction: the sum of V1 and V2 must exceed the sum of V3 and V4, since the output voltage cannot pull below zero with only a single supply.

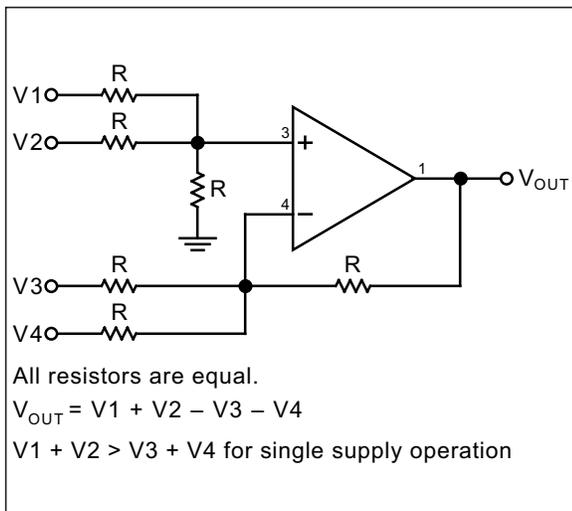

**FIGURE 4-6:** Summing Amplifier.

## 5.0 PACKAGING INFORMATION

### 5.1 Package Marking Information

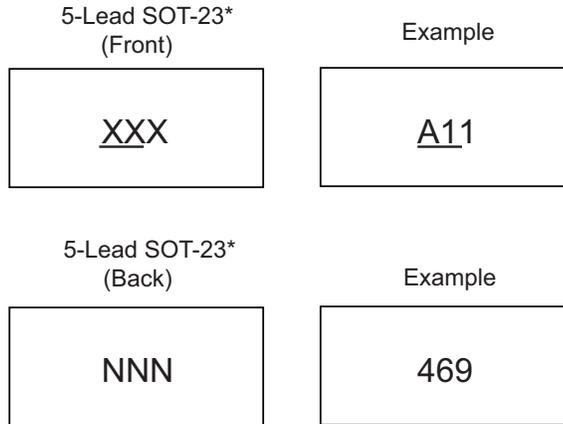

|  |
|--|
| <p><b>Legend:</b> XX...X Product code or customer-specific information<br/>         Y Year code (last digit of calendar year)<br/>         YY Year code (last 2 digits of calendar year)<br/>         WW Week code (week of January 1 is week '01')<br/>         NNN Alphanumeric traceability code<br/>         Ⓔ3 Pb-free JEDEC® designator for Matte Tin (Sn)<br/>         * This package is Pb-free. The Pb-free JEDEC designator (Ⓔ3) can be found on the outer packaging for this package.<br/>         ●, ▲, ▼ Pin one index is identified by a dot, delta up, or delta down (triangle mark).</p> |
| <p><b>Note:</b> In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for customer-specific information. Package may or may not include the corporate logo.<br/>         Underbar ( _ ) and/or Overbar ( ¯ ) symbol may not be to scale.</p>  |


# MIC6211

## 5-Lead SOT23 Package Outline and Recommended Land Pattern

**TITLE**

5 LEAD SOT23 PACKAGE OUTLINE & RECOMMENDED LAND PATTERN

|                  |                |             |    |
|------------------|----------------|-------------|----|
| <b>DRAWING #</b> | SOT23-5LD-PL-1 | <b>UNIT</b> | MM |
|------------------|----------------|-------------|----|

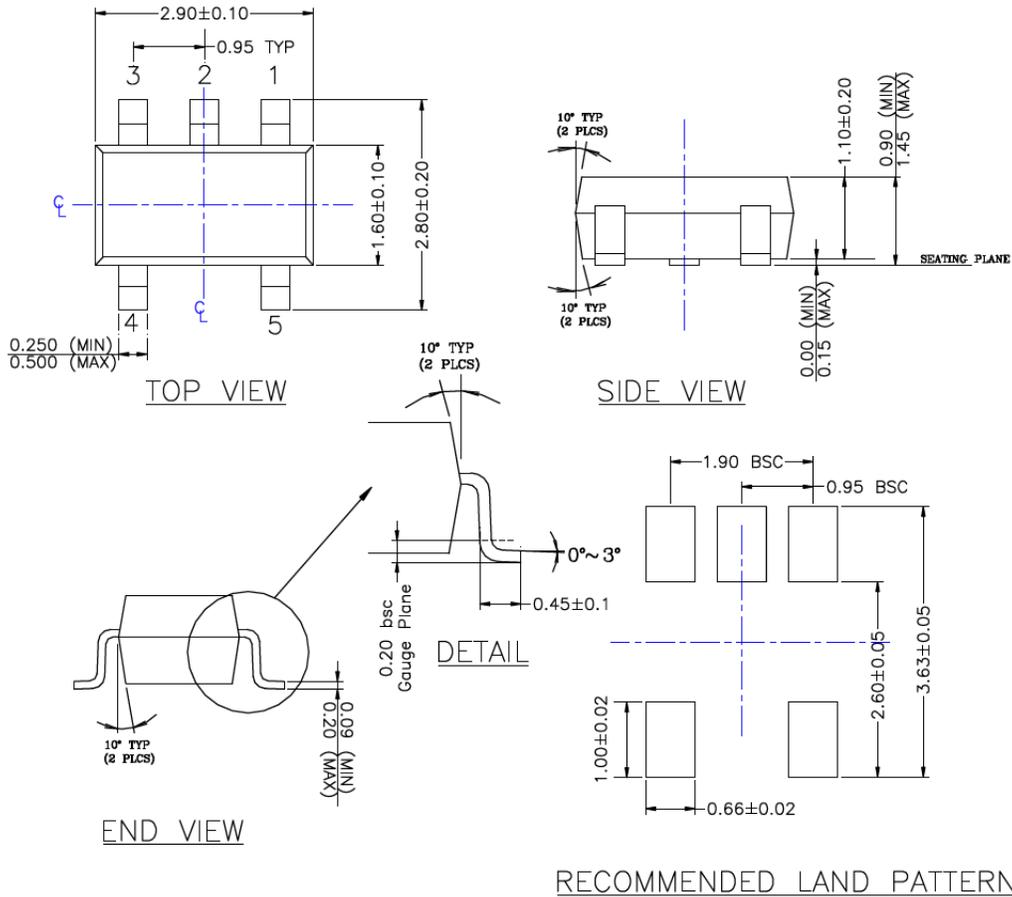

**NOTE:**

1. PACKAGE OUTLINE EXCLUSIVE OF MOLD FLASH & BURR.
2. PACKAGE OUTLINE INCLUSIVE OF SOLER PLATING.
3. DIMENSION AND TOLERANCE PER ANSI Y14.5M, 1982.
4. FOOT LENGTH MEASUREMENT BASED ON GAUGE PLANE METHOD.
5. DIE FACES UP FOR MOLD, AND FACES DOWN FOR TRIM/FORM.
6. ALL DIMENSIONS ARE IN MILLIMETERS.

Note: For the most current package drawings, please see the Microchip Packaging Specification located at <http://www.microchip.com/packaging>.

## APPENDIX A: REVISION HISTORY

### Revision A (July 2020)

- Converted Micrel document MIC6211 to Microchip data sheet template DS20006346A.
- Minor text changes throughout.

# MIC6211

---

NOTES:

## PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, contact your local Microchip representative or sales office.

| <u>PART NO.</u>         | X              | XX                    | -XX        |
|-------------------------|----------------|-----------------------|------------|
| Device                  | Temperature    | Package               | Media Type |
| <b>Device:</b> MIC6211: |                | Operational Amplifier |            |
| <b>Temperature:</b> Y = | -40°C to +85°C |                       |            |
| <b>Package:</b> M5 =    | 5-Lead SOT-23  |                       |            |
| <b>Media Type:</b> TR = | 3,000/Reel     |                       |            |

**Examples:**

a) MIC6211YM5-TR: Op Amp, -40°C to +85°C  
Junction Temperature  
Range, 5-Lead SOT-23  
Package, 3,000/Reel

**Note 1:** Tape and Reel identifier only appears in the catalog part number description. This identifier is used for ordering purposes and is not printed on the device package. Check with your Microchip Sales Office for package availability with the Tape and Reel option.

# MIC6211

---

NOTES:

---

---

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as “unbreakable.”

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

### Trademarks

The Microchip name and logo, the Microchip logo, Adaptec, AnyRate, AVR, AVR logo, AVR Freaks, BesTime, BitCloud, chipKIT, chipKIT logo, CryptoMemory, CryptoRF, dsPIC, FlashFlex, flexPWR, HELDO, IGLOO, JukeBlox, KeeLoq, Klear, LANCheck, LinkMD, maXStylus, maXTouch, MediaLB, megaAVR, Microsemi, Microsemi logo, MOST, MOST logo, MPLAB, OptoLyzer, PackeTime, PIC, picoPower, PICSTART, PIC32 logo, PolarFire, Prochip Designer, QTouch, SAM-BA, SenGenuity, SpyNIC, SST, SST Logo, SuperFlash, Symmetricom, SyncServer, Tachyon, TempTrackr, TimeSource, tinyAVR, UNI/O, Vectron, and XMEGA are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

APT, ClockWorks, The Embedded Control Solutions Company, EtherSynch, FlashTec, Hyper Speed Control, HyperLight Load, IntelliMOS, Libero, motorBench, mTouch, Powermite 3, Precision Edge, ProASIC, ProASIC Plus, ProASIC Plus logo, Quiet-Wire, SmartFusion, SyncWorld, Temux, TimeCesium, TimeHub, TimePictra, TimeProvider, Vite, WinPath, and ZL are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Adjacent Key Suppression, AKS, Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BlueSky, BodyCom, CodeGuard, CryptoAuthentication, CryptoAutomotive, CryptoCompanion, CryptoController, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, INICnet, Inter-Chip Connectivity, JitterBlocker, KlearNet, KlearNet logo, memBrain, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICKit, PICtail, PowerSmart, PureSilicon, QMatrix, REAL ICE, Ripple Blocker, SAM-ICE, Serial Quad I/O, SMART-I.S., SQI, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

The Adaptec logo, Frequency on Demand, Silicon Storage Technology, and Symmcom are registered trademarks of Microchip Technology Inc. in other countries.

GestIC is a registered trademark of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2020, Microchip Technology Incorporated, All Rights Reserved.

ISBN: 978-1-5224-6417-4

For information regarding Microchip's Quality Management Systems, please visit [www.microchip.com/quality](http://www.microchip.com/quality).



# MICROCHIP

## Worldwide Sales and Service

### AMERICAS

**Corporate Office**  
2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://www.microchip.com/support>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

#### Atlanta

Duluth, GA  
Tel: 678-957-9614  
Fax: 678-957-1455

#### Austin, TX

Tel: 512-257-3370

#### Boston

Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

#### Chicago

Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

#### Dallas

Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

#### Detroit

Novi, MI  
Tel: 248-848-4000

#### Houston, TX

Tel: 281-894-5983

#### Indianapolis

Noblesville, IN  
Tel: 317-773-8323  
Fax: 317-773-5453  
Tel: 317-536-2380

#### Los Angeles

Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608  
Tel: 951-273-7800

#### Raleigh, NC

Tel: 919-844-7510

#### New York, NY

Tel: 631-435-6000

#### San Jose, CA

Tel: 408-735-9110  
Tel: 408-436-4270

#### Canada - Toronto

Tel: 905-695-1980  
Fax: 905-695-2078

### ASIA/PACIFIC

**Australia - Sydney**  
Tel: 61-2-9868-6733

**China - Beijing**  
Tel: 86-10-8569-7000

**China - Chengdu**  
Tel: 86-28-8665-5511

**China - Chongqing**  
Tel: 86-23-8980-9588

**China - Dongguan**  
Tel: 86-769-8702-9880

**China - Guangzhou**  
Tel: 86-20-8755-8029

**China - Hangzhou**  
Tel: 86-571-8792-8115

**China - Hong Kong SAR**  
Tel: 852-2943-5100

**China - Nanjing**  
Tel: 86-25-8473-2460

**China - Qingdao**  
Tel: 86-532-8502-7355

**China - Shanghai**  
Tel: 86-21-3326-8000

**China - Shenyang**  
Tel: 86-24-2334-2829

**China - Shenzhen**  
Tel: 86-755-8864-2200

**China - Suzhou**  
Tel: 86-186-6233-1526

**China - Wuhan**  
Tel: 86-27-5980-5300

**China - Xian**  
Tel: 86-29-8833-7252

**China - Xiamen**  
Tel: 86-592-2388138

**China - Zhuhai**  
Tel: 86-756-3210040

### ASIA/PACIFIC

**India - Bangalore**  
Tel: 91-80-3090-4444

**India - New Delhi**  
Tel: 91-11-4160-8631

**India - Pune**  
Tel: 91-20-4121-0141

**Japan - Osaka**  
Tel: 81-6-6152-7160

**Japan - Tokyo**  
Tel: 81-3-6880-3770

**Korea - Daegu**  
Tel: 82-53-744-4301

**Korea - Seoul**  
Tel: 82-2-554-7200

**Malaysia - Kuala Lumpur**  
Tel: 60-3-7651-7906

**Malaysia - Penang**  
Tel: 60-4-227-8870

**Philippines - Manila**  
Tel: 63-2-634-9065

**Singapore**  
Tel: 65-6334-8870

**Taiwan - Hsin Chu**  
Tel: 886-3-577-8366

**Taiwan - Kaohsiung**  
Tel: 886-7-213-7830

**Taiwan - Taipei**  
Tel: 886-2-2508-8600

**Thailand - Bangkok**  
Tel: 66-2-694-1351

**Vietnam - Ho Chi Minh**  
Tel: 84-28-5448-2100

### EUROPE

**Austria - Wels**  
Tel: 43-7242-2244-39  
Fax: 43-7242-2244-393

**Denmark - Copenhagen**  
Tel: 45-4485-5910  
Fax: 45-4485-2829

**Finland - Espoo**  
Tel: 358-9-4520-820

**France - Paris**  
Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

**Germany - Garching**  
Tel: 49-8931-9700

**Germany - Haan**  
Tel: 49-2129-3766400

**Germany - Heilbronn**  
Tel: 49-7131-72400

**Germany - Karlsruhe**  
Tel: 49-721-625370

**Germany - Munich**  
Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

**Germany - Rosenheim**  
Tel: 49-8031-354-560

**Israel - Ra'anana**  
Tel: 972-9-744-7705

**Italy - Milan**  
Tel: 39-0331-742611  
Fax: 39-0331-466781

**Italy - Padova**  
Tel: 39-049-7625286

**Netherlands - Drunen**  
Tel: 31-416-690399  
Fax: 31-416-690340

**Norway - Trondheim**  
Tel: 47-7288-4388

**Poland - Warsaw**  
Tel: 48-22-3325737

**Romania - Bucharest**  
Tel: 40-21-407-87-50

**Spain - Madrid**  
Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

**Sweden - Gothenberg**  
Tel: 46-31-704-60-40

**Sweden - Stockholm**  
Tel: 46-8-5090-4654

**UK - Wokingham**  
Tel: 44-118-921-5800  
Fax: 44-118-921-5820