



5 Watt RF Load DC to 6 GHz With 2.2-5 Male Input Brass Body

RF Terminations Technical Data Sheet

PE6TR1162

Features

- DC to 6 GHz Frequency Range
- 50 Ohm Impedance
- 2.2-5 Male Coaxial Interface
- Max VSWR 1.25:1
- Max Power 5 Watts (CW)

Applications

- 5G Cellular bands
- Radar Systems
- Commercial and Military Communication
- SatCom
- Test and Measurement

Description

Pasternack's PE6TR1162 is an RF termination (also called RF load or dummy load) that operates from DC to 6 GHz and handles up to 5 Watt (CW). Our 2.2-5 termination / load has a male gender. PE6TR1162 2.2-5 load termination offers 1.25:1 max VSWR.

RF load / terminations are indispensable components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can potentially damage the device or reduce the signal integrity. By using a terminator on an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These termination components are commonly used to terminate devices such as couplers, circulators, and switches. They are also widely used in measurement systems to ensure accurate results. Pasternack offers a huge selection of RF, microwave and millimeter wave terminations up to 65 GHz with excellent performance over the entire operating range and power handling capabilities up to 800 Watt (CW).

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
Impedance		50		Ohms
VSWR			1.25:1	
Input Power (CW)			5	Watts
Input Power (Peak) 8% Duty Cycle, 20us PW			50	Watts

Mechanical Specifications

Size	
Length	1.38 in [35.05 mm]
Width	0.63 in [16 mm]
Height	0.63 in [16 mm]
Weight	0.11 lbs [49.9 g]
Package Type	Connectorized

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [5 Watt RF Load DC to 6 GHz With 2.2-5 Male Input Brass Body PE6TR1162](#)



5 Watt RF Load DC to 6 GHz With 2.2-5 Male Input Brass Body

RF Terminations Technical Data Sheet

PE6TR1162

Configuration

Connector 2.2-5 Male
Termination Design RF Load

Material Specifications

Description	Material	Plating
Connector 1 Contact	Beryllium Copper	Silver
Insulation	PTFE	
Body	Brass	Copper-Tin-Zinc Alloy
Housing	Brass	Tri-Metal

Environmental Specifications

Temperature

Operating Range -40 to +75 deg C
Storage Range -50 to +85 deg C

Humidity <95%
Shock IEC 60068-2-27
Vibration IEC 60068-2-6-Fc
Altitude <5000m
Thermal Shock IEC 60068 -2-14-Na

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [5 Watt RF Load DC to 6 GHz With 2.2-5 Male Input Brass Body PE6TR1162](#)



5 Watt RF Load DC to 6 GHz With 2.2-5 Male Input Brass Body

RF Terminations Technical Data Sheet

PE6TR1162

5 Watt RF Load DC to 6 GHz With 2.2-5 Male Input Brass Body from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [5 Watt RF Load DC to 6 GHz With 2.2-5 Male Input Brass Body PE6TR1162](https://www.pasternack.com/5-watts-feed-thru-load-6-ghz-pe6tr1162-p.aspx)

URL: <https://www.pasternack.com/5-watts-feed-thru-load-6-ghz-pe6tr1162-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE6TR1162 CAD Drawing

5 Watt RF Load DC to 6 GHz With 2.2-5 Male Input Brass Body

F

E

D

C

B

A

F

E

D

C

B

A

1

2

3


4

5

6

REVISION

ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	06/23/2023	DZINN	SPONG

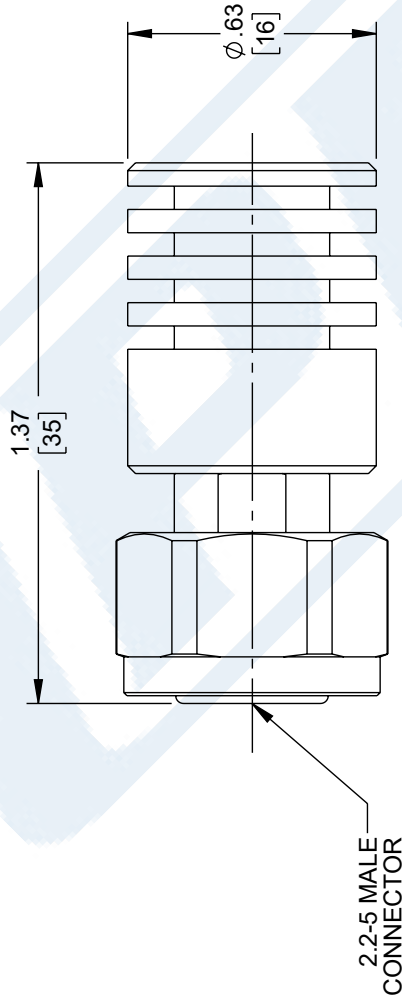

2.2-5 MALE
CONNECTOR

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE IN INCHES
DIMENSIONS IN [] ARE IN MILLIMETERS

TOLERANCES:
X = ±.02 [0.5]
XX = ±.02 [0.5]
XXX = ±.005 [0.13]

FRACTIONS
± 1/32

ANGLES ± 1°

CABLE LENGTH TOLERANCES:

<12 [305] = ±.1 [25] / -0
>12 [305] ≤ 60 [1524] = ±.2 [51] / -0
>60 [1524] ≤ 120 [3048] = ±.4 [102] / -0
>120 [3048] ≤ 300 [7620] = ±.6 [152] / -0
>300 [7620] = ±.5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE
UNLESS OTHERWISE SPECIFIED
DIMENSIONS MAY VARY IN SIZE AND LOCATION



Website: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920

DESCRIPTION

RF TERMINATION, 5W, 2.2-5 MALE, 6GHz



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE

NONE

SHEET

1 OF 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN
PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.
THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE
EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

T-Rev.D2