SIEMENS

Data sheet 3RT1055-6AD36



power contactor, AC-3e/AC-3 150 A, 75 kW / 400 V AC (50-60 Hz) / DC Uc: 42-48 V 3-pole, auxiliary contacts 2 NO + 2 NC drive: conventional main circuit: busbar control and auxiliary circuit: screw terminal

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT1
General technical data	
size of contactor	S6
product extension	
 function module for communication 	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	27 W
 at AC in hot operating state per pole 	9 W
 without load current share typical 	5.2 W
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	1 000 V
 of auxiliary circuit with degree of pollution 3 rated value 	500 V
surge voltage resistance	
of main circuit rated value	8 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	690 V
shock resistance at rectangular impulse	
• at AC	8,5g / 5 ms, 4,2g / 10 ms
• at DC	8,5g / 5 ms, 4,2g / 10 ms
shock resistance with sine pulse	
• at AC	13,4g / 5 ms, 6,5g / 10 ms
• at DC	13,4g / 5 ms, 6,5g / 10 ms
mechanical service life (operating cycles)	
of contactor typical	10 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
 of the contactor with added auxiliary switch block typical 	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/01/2012
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %

ain circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
 at AC-3 rated value maximum 	1 000 V
 at AC-3e rated value maximum 	1 000 V
operational current	
 at AC-1 at 400 V at ambient temperature 40 °C rated value 	185 A
• at AC-1	
 up to 690 V at ambient temperature 40 °C rated value 	185 A
— up to 690 V at ambient temperature 60 $^{\circ}\text{C}$ rated value	160 A
— up to 1000 V at ambient temperature 40 $^{\circ}\text{C}$ rated value	90 A
— up to 1000 V at ambient temperature 60 $^{\circ}\text{C}$ rated value	90 A
• at AC-3	
— at 400 V rated value	150 A
— at 500 V rated value	150 A
— at 690 V rated value	150 A
— at 1000 V rated value	65 A
• at AC-3e	
— at 400 V rated value	150 A
— at 500 V rated value	150 A
— at 690 V rated value	150 A
— at 1000 V rated value	65 A
• at AC-4 at 400 V rated value	132 A
• at AC-5a up to 690 V rated value	162 A
at AC-5b up to 400 V rated value	124 A
• at AC-6a	
— up to 230 V for current peak value n=20 rated value	150 A
— up to 400 V for current peak value n=20 rated value	150 A
— up to 500 V for current peak value n=20 rated value	150 A
— up to 690 V for current peak value n=20 rated value	150 A
— up to 1000 V for current peak value n=20 rated	65 A
value	
• at AC-6a	
— up to 230 V for current peak value n=30 rated value	105 A
— up to 400 V for current peak value n=30 rated value	105 A
— up to 500 V for current peak value n=30 rated value	105 A
— up to 690 V for current peak value n=30 rated value	105 A
— up to 1000 V for current peak value n=30 rated value	65 A
minimum cross-section in main circuit at maximum AC-1 rated value	95 mm²
operational current for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	68 A
at 690 V rated value	57 A
operational current	
• at 1 current path at DC-1	
— at 24 V rated value	160 A
— at 60 V rated value	160 A
— at 110 V rated value	18 A
— at 220 V rated value	3.4 A
— at 440 V rated value	0.8 A
— at 600 V rated value	0.5 A
with 2 current paths in series at DC-1	
— at 24 V rated value	160 A
— at 60 V rated value	160 A
— at 110 V rated value	160 A

1000.77	00 A
— at 220 V rated value	20 A
— at 440 V rated value	3.2 A
— at 600 V rated value	1.6 A
with 3 current paths in series at DC-1	
— at 24 V rated value	160 A
— at 60 V rated value	160 A
— at 110 V rated value	160 A
— at 220 V rated value	160 A
— at 440 V rated value	11.5 A
— at 600 V rated value	4 A
 at 1 current path at DC-3 at DC-5 	
— at 24 V rated value	160 A
— at 60 V rated value	7.5 A
— at 220 V rated value	0.6 A
— at 440 V rated value	0.17 A
— at 600 V rated value	0.12 A
 with 2 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	160 A
— at 60 V rated value	160 A
— at 110 V rated value	160 A
— at 220 V rated value	2.5 A
— at 440 V rated value	0.65 A
— at 600 V rated value	0.37 A
 with 3 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	160 A
— at 60 V rated value	160 A
— at 110 V rated value	160 A
— at 220 V rated value	160 A
— at 440 V rated value	1.4 A
— at 600 V rated value	0.75 A
operating power	
• at AC-3	
— at 230 V rated value	45 kW
— at 400 V rated value	75 kW
— at 500 V rated value	90 kW
— at 690 V rated value	132 kW
— at 1000 V rated value	90 kW
• at AC-3e	
— at 230 V rated value	45 kW
— at 400 V rated value	75 kW
— at 500 V rated value	90 kW
— at 690 V rated value	132 kW
— at 1000 V rated value	90 kW
operating power for approx. 200000 operating cycles at AC-	
4	
• at 400 V rated value	38 kW
at 690 V rated value	55 kW
operating apparent power at AC-6a	
• up to 230 V for current peak value n=20 rated value	60 000 kVA
• up to 400 V for current peak value n=20 rated value	100 000 VA
 up to 500 V for current peak value n=20 rated value 	130 000 VA
• up to 690 V for current peak value n=20 rated value	170 000 VA
• up to 1000 V for current peak value n=20 rated value	110 000 VA
operating apparent power at AC-6a	
up to 230 V for current peak value n=30 rated value	40 000 VA
 up to 400 V for current peak value n=30 rated value 	70 000 VA
 up to 500 V for current peak value n=30 rated value 	90 000 VA
 up to 690 V for current peak value n=30 rated value 	120 000 VA
• up to 1000 V for current peak value n=30 rated value	110 000 VA
short-time withstand current in cold operating state up to	
40 °C	

 limited to 1 s switching at zero current maximum 	2 727 A; Use minimum cross-section acc. to AC-1 rated value		
 limited to 5 s switching at zero current maximum 	1 831 A; Use minimum cross-section acc. to AC-1 rated value		
 limited to 10 s switching at zero current maximum 	1 300 A; Use minimum cross-section acc. to AC-1 rated value		
 limited to 30 s switching at zero current maximum 	850 A; Use minimum cross-section acc. to AC-1 rated value		
 limited to 60 s switching at zero current maximum 	703 A; Use minimum cross-section acc. to AC-1 rated value		
no-load switching frequency			
• at AC	2 000 1/h		
• at DC	2 000 1/h		
operating frequency			
• at AC-1 maximum	800 1/h		
• at AC-2 maximum	300 1/h		
• at AC-3 maximum	750 1/h		
at AC-3e maximum	750 1/h		
• at AC-4 maximum	130 1/h		
Control circuit/ Control	130 1/11		
	AOIDO		
type of voltage of the control supply voltage	AC/DC		
control supply voltage at AC			
at 50 Hz rated value	42 48 V		
at 60 Hz rated value	42 48 V		
control supply voltage at DC			
rated value	42 48 V		
operating range factor control supply voltage rated value of magnet coil at DC			
initial value	0.8		
full-scale value	1.1		
operating range factor control supply voltage rated value of magnet coil at AC			
• at 50 Hz	0.8 1.1		
● at 60 Hz	0.8 1.1		
design of the surge suppressor	with varistor		
apparent pick-up power of magnet coil at AC			
● at 50 Hz	300 VA		
● at 60 Hz	300 VA		
inductive power factor with closing power of the coil			
● at 50 Hz	0.9		
• at 60 Hz	0.9		
apparent holding power of magnet coil at AC			
• at 50 Hz	5.8 VA		
• at 60 Hz	5.8 VA		
inductive power factor with the holding power of the coil			
• at 50 Hz	0.8		
• at 60 Hz	0.8		
closing power of magnet coil at DC	360 W		
holding power of magnet coil at DC	5.2 W		
closing delay			
• at AC	20 95 ms		
• at DC	20 95 ms		
opening delay			
• at AC	40 60 ms		
• at DC	40 60 ms		
	10 15 ms		
arcing time	Standard A1 - A2		
control version of the switch operating mechanism	Otaliualu AT - MZ		
Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact	2		
number of NO contacts for auxiliary contacts instantaneous contact	2		
	10.0		
operational current at AC-12 maximum	10 A		
operational current at AC-15	C A		
at 230 V rated value	6 A		
• at 400 V rated value	3 A		
at 500 V rated value	2 A		

at 690 V rated value	1 A		
operational current at DC-12			
at 24 V rated value	10 A		
at 48 V rated value	6 A		
• at 60 V rated value	6 A		
 at 110 V rated value 	3 A		
 at 125 V rated value 	2 A		
 at 220 V rated value 	1 A		
at 600 V rated value	0.15 A		
operational current at DC-13			
at 24 V rated value	10 A		
at 48 V rated value	2 A		
at 60 V rated value	2 A		
at 110 V rated value	1 A		
at 125 V rated value	0.9 A		
at 220 V rated value	0.3 A		
at 600 V rated value	0.1 A		
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)		
UL/CSA ratings			
full-load current (FLA) for 3-phase AC motor			
• at 480 V rated value	156 A		
at 400 V rated value at 600 V rated value	144 A		
yielded mechanical performance [hp]			
for single-phase AC motor			
	20 hn		
— at 230 V rated value● for 3-phase AC motor	30 hp		
·	504		
— at 200/208 V rated value	50 hp		
— at 220/230 V rated value	60 hp		
— at 460/480 V rated value	125 hp		
— at 575/600 V rated value	150 hp		
contact rating of auxiliary contacts according to UL	A600 / Q600		
Short-circuit protection			
Short-circuit protection design of the fuse link			
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit			
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required	gG: 355 A (690 V, 100 kA)		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA)		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA)		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA)		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm 10 mm 10 mm 10 mm 0 mm		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm 0 mm 0 mm		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — torwards — upwards	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm 0 mm 0 mm 0 mm		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — upwards — upwards — at the side • for grounded parts — forwards — upwards — upwards — at the side	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm 0 mm 0 mm 0 mm 10 mm 10 mm 10 mm		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side — at the side — at the side — downwards	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm 0 mm 0 mm 0 mm		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side — downwards • for live parts	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm 20 mm 10 mm 10 mm 10 mm 10 mm 10 mm		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side — downwards — at the side — downwards — at the side — forwards — forwards — forwards — forwards — forwards	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm 20 mm 10 mm 10 mm 10 mm 10 mm 10 mm 10 mm		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side — downwards • for live parts	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm 20 mm 10 mm 10 mm 10 mm 10 mm 10 mm		
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — forwards — upwards — at the side — downwards — at the side — downwards — at the side — forwards — forwards — forwards — forwards — forwards	gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm 20 mm 10 mm 10 mm 10 mm 10 mm 10 mm 10 mm		

— at the side	10 mm	
Connections/ Terminals		
type of electrical connection		
• for main current circuit	Connection bar	
 for auxiliary and control circuit 	screw-type terminals	
 at contactor for auxiliary contacts 	Screw-type terminals	
of magnet coil	Screw-type terminals	
width of connection bar	17 mm	
thickness of connection bar	3 mm	
diameter of holes	9 mm	
number of holes	1	
connectable conductor cross-section for main contacts		
stranded	25 120 mm²	
connectable conductor cross-section for auxiliary contacts		
 solid or stranded 	0.5 4 mm²	
 finely stranded with core end processing 	0.5 2.5 mm²	
type of connectable conductor cross-sections		
for auxiliary contacts		
— solid	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), max. 2x (0.75 4 mm²)	
 — solid or stranded 	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), max. 2x (0,75 4 mm²)	
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)	
for AWG cables for auxiliary contacts	2x (20 16), 2x (18 14), 1x 12	
AWG number as coded connectable conductor cross section		
for auxiliary contacts	18 14	
Safety related data		
product function		
 mirror contact according to IEC 60947-4-1 	Yes	
 positively driven operation according to IEC 60947-5-1 	No	
B10 value with high demand rate according to SN 31920	1 000 000	
T1 value for proof test interval or service life according to IEC 61508	20 a	
protection class IP on the front according to IEC 60529	IP00; IP20 with box terminal/cover	
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with box terminal/cover	
suitability for use		
safety-related switching OFF	Yes	

Certificates/ approvals

General Product Approval





Confirmation



<u>KC</u>



Functional Safety/Safety of N chinery	a- Declaration of Conformity	Test Certificates
---------------------------------------	------------------------------	-------------------



Type Examination Certificate





Special Test Certificate

Type Test Certificates/Test Report

Marine / Shipping other











Confirmation

other Railway

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Confirmation

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1055-6AD36

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1055-6AD36

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT1055-6AD36

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1055-6AD36&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT1055-6AD36/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1055-6AD36&objecttype=14&gridview=view1







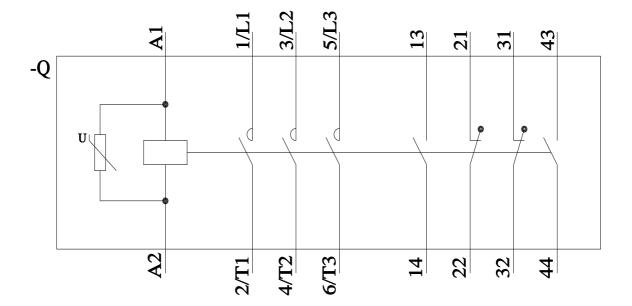

last modified: 2/10/2023 🖸