SIEMENS

Data sheet

3RT1055-6AU36



power contactor, AC-3e/AC-3 150 A, 75 kW / 400 V AC (50-60 Hz) / DC Uc: 240-277 V 3-pole, auxiliary contacts 2 NO + 2 NC drive: conventional main circuit: busbar control and auxiliary circuit: screw terminal

product brand name	SIRIUS
product drand name	Power contactor
	3RT1
product type designation	JR11
General technical data	00
size of contactor	S6
product extension	
function module for communication	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
at AC in hot operating state	27 W
 at AC in hot operating state per pole 	9 W
without load current share typical	5.2 W
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	1 000 V
 of auxiliary circuit with degree of pollution 3 rated value 	500 V
surge voltage resistance	
 of main circuit rated value 	8 kV
 of auxiliary circuit rated value 	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	690 V
shock resistance at rectangular impulse	
• at AC	8,5g / 5 ms, 4,2g / 10 ms
• at DC	8,5g / 5 ms, 4,2g / 10 ms
shock resistance with sine pulse	
• at AC	13,4g / 5 ms, 6,5g / 10 ms
• at DC	13,4g / 5 ms, 6,5g / 10 ms
mechanical service life (operating cycles)	
 of contactor typical 	10 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
 of the contactor with added auxiliary switch block typical 	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/01/2012
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %

Main circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
 at AC-3 rated value maximum 	1 000 V
 at AC-3e rated value maximum 	1 000 V
operational current	
 at AC-1 at 400 V at ambient temperature 40 °C rated value 	185 A
● at AC-1	
— up to 690 V at ambient temperature 40 °C rated value	185 A
 — up to 690 V at ambient temperature 60 °C rated value 	160 A
— up to 1000 V at ambient temperature 40 °C rated value	90 A
— up to 1000 V at ambient temperature 60 °C rated value	90 A
• at AC-3	
— at 400 V rated value	150 A
— at 500 V rated value	150 A
— at 690 V rated value	150 A
— at 1000 V rated value	65 A
• at AC-3e	450.4
- at 400 V rated value	150 A
— at 500 V rated value	150 A
— at 690 V rated value	150 A
— at 1000 V rated value	65 A
at AC-4 at 400 V rated value	132 A
at AC-5a up to 690 V rated value	162 A
 at AC-5b up to 400 V rated value at AC-6a 	124 A
— up to 230 V for current peak value n=20 rated value	150 A
— up to 400 V for current peak value n=20 rated value	150 A
— up to 500 V for current peak value n=20 rated value	150 A
— up to 690 V for current peak value n=20 rated value	150 A
 up to 1000 V for current peak value n=20 rated value at AC-6a 	65 A
 up to 230 V for current peak value n=30 rated value 	105 A
— up to 200 V for current peak value n=30 rated value	105 A
— up to 500 V for current peak value n=30 rated value	105 A
— up to 690 V for current peak value n=30 rated value	105 A
— up to 1000 V for current peak value n=30 rated value value	65 A
minimum cross-section in main circuit at maximum AC-1 rated value	95 mm²
operational current for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	68 A
• at 690 V rated value	57 A
operational current	
 at 1 current path at DC-1 	
— at 24 V rated value	160 A
— at 60 V rated value	160 A
— at 110 V rated value	18 A
— at 220 V rated value	3.4 A
— at 440 V rated value	0.8 A
— at 600 V rated value	0.5 A
 with 2 current paths in series at DC-1 	
— at 24 V rated value	160 A
— at 60 V rated value	160 A
— at 110 V rated value	160 A

— at 220 V rated value	20 A
— at 440 V rated value	3.2 A
— at 600 V rated value	1.6 A
 with 3 current paths in series at DC-1 	
— at 24 V rated value	160 A
— at 60 V rated value	160 A
— at 110 V rated value	160 A
— at 220 V rated value	160 A
— at 440 V rated value	11.5 A
— at 600 V rated value	4 A
 at 1 current path at DC-3 at DC-5 	
— at 24 V rated value	160 A
— at 60 V rated value	7.5 A
— at 220 V rated value	0.6 A
— at 440 V rated value	0.17 A
— at 600 V rated value	0.12 A
 with 2 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	160 A
— at 60 V rated value	160 A
— at 110 V rated value	160 A
— at 220 V rated value	2.5 A
— at 440 V rated value	0.65 A
— at 600 V rated value	0.37 A
 with 3 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	160 A
— at 60 V rated value	160 A
— at 110 V rated value	160 A
— at 220 V rated value	160 A
— at 440 V rated value	1.4 A
— at 600 V rated value	0.75 A
operating power	
• at AC-3	
— at 230 V rated value	45 kW
— at 400 V rated value	75 kW
— at 500 V rated value	90 kW
— at 690 V rated value	132 kW
— at 1000 V rated value	90 kW
• at AC-3e	
— at 230 V rated value	45 kW
— at 400 V rated value	75 kW
— at 500 V rated value	90 kW
— at 690 V rated value	132 kW
— at 1000 V rated value	90 kW
operating power for approx. 200000 operating cycles at AC- 4	
at 400 V rated value	38 kW
at 690 V rated value	55 kW
operating apparent power at AC-6a	
• up to 230 V for current peak value n=20 rated value	60 000 kVA
 up to 400 V for current peak value n=20 rated value 	100 000 VA
 up to 500 V for current peak value n=20 rated value 	130 000 VA
• up to 690 V for current peak value n=20 rated value	170 000 VA
• up to 1000 V for current peak value n=20 rated value	110 000 VA
operating apparent power at AC-6a	
• up to 230 V for current peak value n=30 rated value	40 000 VA
 up to 400 V for current peak value n=30 rated value 	70 000 VA
 up to 500 V for current peak value n=30 rated value 	90 000 VA
 up to 690 V for current peak value n=30 rated value 	120 000 VA
• up to 1000 V for current peak value n=30 rated value	110 000 VA
short-time withstand current in cold operating state up to	
40 °C	

 limited to 1 s switching at zero current maximum 	2 727 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 5 s switching at zero current maximum 	1 831 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 10 s switching at zero current maximum 	1 300 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 30 s switching at zero current maximum 	850 A; Use minimum cross-section acc. to AC-1 rated value
 limited to 60 s switching at zero current maximum 	703 A; Use minimum cross-section acc. to AC-1 rated value
no-load switching frequency	
• at AC	2 000 1/h
• at DC	2 000 1/h
operating frequency	
• at AC-1 maximum	800 1/h
• at AC-2 maximum	300 1/h
• at AC-3 maximum	750 1/h
• at AC-3e maximum	750 1/h
• at AC-4 maximum	130 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC	
• at 50 Hz rated value	240 277 V
at 60 Hz rated value	240 277 V
control supply voltage at DC	
rated value	240 277 V
operating range factor control supply voltage rated value of magnet coil at DC	
• initial value	0.8
• full-scale value	1.1
operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 1.1
• at 60 Hz	0.8 1.1
design of the surge suppressor	with varistor
apparent pick-up power of magnet coil at AC	200.1/4
• at 50 Hz	300 VA
• at 60 Hz inductive power factor with closing power of the coil	300 VA
• at 50 Hz	0.9
• at 60 Hz	0.9
apparent holding power of magnet coil at AC	0.0
• at 50 Hz	5.8 VA
• at 60 Hz	5.8 VA
inductive power factor with the holding power of the coil	
• at 50 Hz	0.8
• at 60 Hz	0.8
closing power of magnet coil at DC	360 W
holding power of magnet coil at DC	5.2 W
closing delay	
• at AC	20 95 ms
• at DC	20 95 ms
opening delay	
• at AC	40 60 ms
• at DC	40 60 ms
arcing time	10 15 ms
control version of the switch operating mechanism	Standard A1 - A2
Auxiliary circuit	
number of NC contacts for auxiliary contacts instantaneous contact	2
number of NO contacts for auxiliary contacts instantaneous contact	2
operational current at AC-12 maximum	
	10 A
operational current at AC-15	10 A
	6 A
operational current at AC-15	

at 690 V rated value	1 A
operational current at DC-12	
 at 24 V rated value 	10 A
 at 48 V rated value 	6 A
• at 60 V rated value	6 A
 at 110 V rated value 	3 A
 at 125 V rated value 	2 A
 at 220 V rated value 	1 A
• at 600 V rated value	0.15 A
operational current at DC-13	
 at 24 V rated value 	10 A
 at 48 V rated value 	2 A
 at 60 V rated value 	2 A
• at 110 V rated value	1 A
• at 125 V rated value	0.9 A
• at 220 V rated value	0.3 A
• at 600 V rated value	0.1 A
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
• at 480 V rated value	156 A
at 600 V rated value	144 A
yielded mechanical performance [hp]	
• for single-phase AC motor	
— at 230 V rated value	30 hp
• for 3-phase AC motor	
— at 200/208 V rated value	50 hp
— at 220/230 V rated value	60 hp
— at 460/480 V rated value	125 hp
— at 575/600 V rated value	150 hp
contact rating of auxiliary contacts according to III	A600 / O600
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	A600 / Q600
Short-circuit protection design of the fuse link	A600 / Q600
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit	
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required	gG: 355 A (690 V, 100 kA)
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA)
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA)
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA)
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm 20 mm
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm 20 mm 10 mm
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit - with type of coordination 1 required - with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting - forwards - upwards - downwards	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm 0 mm 10 mm
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit - with type of coordination 1 required - with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting - forwards - upwards - downwards - at the side	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm 20 mm 10 mm
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit - with type of coordination 1 required - with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting - forwards - upwards - downwards - at the side • for grounded parts	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 120 mm 10 mm 0 mm
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit - with type of coordination 1 required - with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting - forwards - upwards - at the side • for grounded parts - forwards	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm 20 mm 0 mm 20 mm
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit - with type of coordination 1 required - with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting - forwards - upwards - at the side • for grounded parts - upwards - upwards - upwards	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 10 mm 0 mm 20 mm 10 mm 10 mm 10 mm
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit - with type of coordination 1 required - with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting - forwards - upwards - at the side • for grounded parts - forwards - upwards - at the side	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm 20 mm 10 mm
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit - with type of coordination 1 required - with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting - forwards - upwards - at the side • for grounded parts - forwards - upwards - at the side - downwards	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 10 mm 0 mm 20 mm 10 mm 10 mm 10 mm
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting — forwards — upwards — downwards — at the side • for grounded parts — downwards — at the side — downwards — at the side — forwards — upwards — forwards — in the side — forwards — upwards — in the side — in the side </td <td>gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm 20 mm 10 mm 0 mm 10 mm</td>	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm 20 mm 10 mm 0 mm 10 mm
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit - with type of coordination 1 required - with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting - forwards - upwards - downwards - at the side • for grounded parts - at the side - downwards - at the side - forwards - for live parts - forwards	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm 20 mm 10 mm 10 mm 20 mm 10 mm 20 mm 10 mm 20 mm
Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit - with type of coordination 1 required - with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method • side-by-side mounting height width depth required spacing • with side-by-side mounting - forwards - upwards - at the side • for grounded parts - forwards - at the side - downwards - at the side - forwards - upwards - forwards - forwar	gG: 355 A (690 V, 100 kA) gG: 315 A (690 V, 100 kA), aM: 200 A (690 V, 50 kA), BS88: 315 A (415 V, 50 kA) gG: 10 A (500 V, 1 kA) with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back screw fixing Yes 172 mm 120 mm 170 mm 20 mm 10 mm 0 mm 10 mm

— at the side			10 mm			
Connections/ Terminal	s					
type of electrical con	nection					
• for main current	circuit		Connection b	Connection bar		
 for auxiliary and 	control circuit		screw-type te	erminals		
 at contactor for a 	auxiliary contacts		Screw-type t	erminals		
 of magnet coil 			Screw-type t	erminals		
width of connection b	bar		17 mm			
thickness of connecti	ion bar		3 mm			
diameter of holes			9 mm			
number of holes			1			
	or cross-section for mair	contacts				
stranded			25 120 mr	n²		
	or cross-section for auxi	liary contacts				
solid or stranded			0.5 4 mm ²			
	vith core end processing		0.5 2.5 mr	n²		
	onductor cross-sections					
 for auxiliary cont 	acts		0 /0 -		0.5	4 2)
— solid	d - d				2.5 mm ²), max. 2x (0.75	
— solid or stra		ine			2,5 mm²), max. 2x (0,75 .	4 mm²)
-	ded with core end process	ing		5 mm²), 2x (0.75 .	'	
AWG number as code	for auxiliary contacts ed connectable conducto	r cross	2X (20 16)	, 2x (18 14), 1:	x 12	
section	acto		10 14			
for auxiliary cont	acts		18 14			
Safety related data						
product function	poording to IEC 60047 4 4		Voc			
	ccording to IEC 60947-4-1	60947 5 1	Yes			
	operation according to IEC		No			
T1 value for proof test	B10 value with high demand rate according to SN 31920 T1 value for proof test interval or service life according to IEC		1 000 000 20 a			
61508	the frent econding to 1	EC 60520		ith how torrain all	20Vor	
-	the front according to I			ith box terminal/c		minal/acuer
•	he front according to IEC	00523	illiger-sate, t	or ventical contac	t from the front with box ter	minal/cover
 suitability for use safety-related sv 			Yes			
• salety-related so Certificates/ approvals		_	100			
	roval					
General Product App	010101					
(SP)		<u>Confirmation</u>	L	ų, u	KC	EHC
EMC	Functional Safety/Safety of Ma- chinery	Declaration of C	Conformity		Test Certificates	
RCM	<u>Type Examination Cer-</u> <u>tificate</u>	UK CA		CE EG-Konf.	<u>Special Test Certific-</u> <u>ate</u>	<u>Type Test Certific-</u> ates/Test Report
Marine / Shipping						other
ABS	Lloyd's Register	PRS		RMRS	DNV-GL	<u>Confirmation</u>
other			Raily	vay		

7/8/2023

Subject to change without notice © Copyright Siemens

Miscellaneous	Miscellaneous	Confirmation	<u>Special Test Certific-</u> <u>ate</u>	Vibration and Shock	

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1055-6AU36

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1055-6AU36

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT1055-6AU36

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1055-6AU36&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT1055-6AU36/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1055-6AU36&objecttype=14&gridview=view1







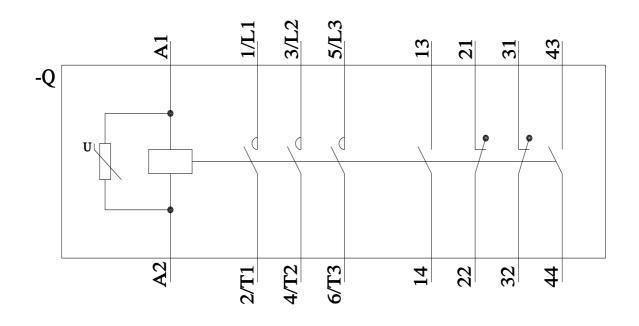

last modified:

2/10/2023 🖸