SIEMENS

Data sheet 3RT1064-2NB36

0101110



power contactor, AC-3e/AC-3 225 A, 110 kW / 400 V AC (50-60 Hz) / DC Uc: 21-27, 3 V PLC input 24 V DC 3-pole, auxiliary contacts 2 NO + 2 NC drive: electronic main circuit: busbar control and auxiliary circuit: spring-loaded terminal

product brand name	SIRIUS
product designation	Power contactor
product type designation	3RT1
General technical data	
size of contactor	S10
product extension	
 function module for communication 	No
auxiliary switch	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state 	51 W
 at AC in hot operating state per pole 	17 W
without load current share typical	3.4 W
insulation voltage	
 of main circuit with degree of pollution 3 rated value 	1 000 V
of auxiliary circuit with degree of pollution 3 rated value	500 V
surge voltage resistance	
of main circuit rated value	8 kV
of auxiliary circuit rated value	6 kV
maximum permissible voltage for protective separation between coil and main contacts according to EN 60947-1	690 V
shock resistance at rectangular impulse	
• at AC	8,5g / 5 ms, 4,2g / 10 ms
• at DC	8,5g / 5 ms, 4,2g / 10 ms
shock resistance with sine pulse	
• at AC	13,4g / 5 ms, 6,5g / 10 ms
• at DC	13,4g / 5 ms, 6,5g / 10 ms
mechanical service life (operating cycles)	
 of contactor typical 	10 000 000
 of the contactor with added electronically optimized auxiliary switch block typical 	5 000 000
of the contactor with added auxiliary switch block typical	10 000 000
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/01/2012
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
 during operation 	-25 +60 °C
during storage	-55 +80 °C
relative humidity minimum	10 %
relative humidity at 55 °C according to IEC 60068-2-30 maximum	95 %

lain circuit	
number of poles for main current circuit	3
number of NO contacts for main contacts	3
operating voltage	
at AC-3 rated value maximum	1 000 V
at AC-3e rated value maximum	1 000 V
operational current	
at AC-1 at 400 V at ambient temperature 40 °C rated value	275 A
• at AC-1	
— up to 690 V at ambient temperature 40 $^{\circ}\text{C}$ rated value	275 A
— up to 690 V at ambient temperature 60 $^{\circ}\text{C}$ rated value	250 A
— up to 1000 V at ambient temperature 40 °C rated value	100 A
— up to 1000 V at ambient temperature 60 °C rated value	100 A
• at AC-3	
— at 400 V rated value	225 A
— at 500 V rated value	225 A
— at 690 V rated value	225 A
— at 1000 V rated value	68 A
• at AC-3e	
— at 400 V rated value	225 A
— at 500 V rated value	225 A
— at 690 V rated value	225 A
— at 1000 V rated value	68 A
• at AC-4 at 400 V rated value	195 A
• at AC-5a up to 690 V rated value	242 A
• at AC-5b up to 400 V rated value	186 A
• at AC-6a	
— up to 230 V for current peak value n=20 rated value	225 A
— up to 400 V for current peak value n=20 rated value	225 A
— up to 500 V for current peak value n=20 rated value	225 A
— up to 690 V for current peak value n=20 rated value	225 A
— up to 1000 V for current peak value n=20 rated	68 A
value	
• at AC-6a	
— up to 230 V for current peak value n=30 rated value	172 A
— up to 400 V for current peak value n=30 rated value	172 A
— up to 500 V for current peak value n=30 rated value	172 A
— up to 690 V for current peak value n=30 rated value	172 A
— up to 1000 V for current peak value n=30 rated value	68 A
minimum cross-section in main circuit at maximum AC-1 rated value	150 mm²
operational current for approx. 200000 operating cycles at AC-4	
• at 400 V rated value	96 A
at 690 V rated value	85 A
operational current	
at 1 current path at DC-1	
— at 24 V rated value	200 A
— at 60 V rated value	200 A
— at 110 V rated value	18 A
— at 220 V rated value	3.4 A
— at 440 V rated value	0.8 A
— at 600 V rated value	0.5 A
 with 2 current paths in series at DC-1 	
— at 24 V rated value	200 A
— at 60 V rated value	200 A

1000.77	00.4
— at 220 V rated value	20 A
— at 440 V rated value	3.2 A
— at 600 V rated value	1.6 A
with 3 current paths in series at DC-1	
— at 24 V rated value	200 A
— at 60 V rated value	200 A
— at 110 V rated value	200 A
— at 220 V rated value	200 A
— at 440 V rated value	11 A
— at 600 V rated value	4 A
 at 1 current path at DC-3 at DC-5 	
— at 24 V rated value	200 A
— at 60 V rated value	7.5 A
— at 220 V rated value	0.6 A
— at 440 V rated value	0.17 A
— at 600 V rated value	0.12 A
 with 2 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	200 A
— at 60 V rated value	200 A
— at 110 V rated value	200 A
— at 220 V rated value	2.5 A
— at 440 V rated value	0.65 A
— at 600 V rated value	0.37 A
 with 3 current paths in series at DC-3 at DC-5 	
— at 24 V rated value	200 A
— at 60 V rated value	200 A
— at 110 V rated value	200 A
— at 220 V rated value	200 A
— at 440 V rated value	1.4 A
— at 600 V rated value	0.75 A
operating power	
• at AC-3	
— at 230 V rated value	55 kW
— at 400 V rated value	110 kW
— at 500 V rated value	160 kW
— at 690 V rated value	200 kW
— at 1000 V rated value	90 kW
• at AC-3e	
— at 230 V rated value	55 kW
— at 400 V rated value	110 kW
— at 500 V rated value	160 kW
— at 690 V rated value	200 kW
— at 1000 V rated value	90 kW
operating power for approx. 200000 operating cycles at AC-	
4	
• at 400 V rated value	54 kW
at 690 V rated value	82 kW
operating apparent power at AC-6a	
• up to 230 V for current peak value n=20 rated value	90 000 kVA
 up to 400 V for current peak value n=20 rated value 	150 000 VA
 up to 500 V for current peak value n=20 rated value 	190 000 VA
• up to 690 V for current peak value n=20 rated value	260 000 VA
• up to 1000 V for current peak value n=20 rated value	110 000 VA
operating apparent power at AC-6a	
• up to 230 V for current peak value n=30 rated value	60 000 VA
• up to 400 V for current peak value n=30 rated value	110 000 VA
• up to 500 V for current peak value n=30 rated value	140 000 VA
 up to 690 V for current peak value n=30 rated value 	200 000 VA
 up to 1000 V for current peak value n=30 rated value 	110 000 VA
short-time withstand current in cold operating state up to	
40 °C	

# limited to 15 switching at zero current maximum # limited to 16 switching at zero current maximum # limited to 10 switching at zero current maximum # limited to 10 switching at zero current maximum # limited to 20 switching at zero current maximum # limited to 20 switching at zero current maximum # limited to 20 switching at zero current maximum 1 Haf A. Use minimum cross-section acc. to AC-1 rated value 1 Haf A. Use minimum cross-section acc. to AC-1 rated value 1 Haf A. Use minimum cross-section acc. to AC-1 rated value 1 Haf A. Use minimum cross-section acc. to AC-1 rated value 2 Haf A. Use minimum cross-section acc. to AC-1 rated value 2 Haf A. Use minimum cross-section acc. to AC-1 rated value 2 Haf A. Use minimum cross-section acc. to AC-1 rated value 2 Haf A. Use minimum cross-section acc. to AC-1 rated value 2 Haf A. Use minimum cross-section acc. to AC-1 rated value 3 Haf A. Use minimum cross-section acc. to AC-1 rated value 4 Haf A. Use minimum cross-section acc. to AC-1 rated value 4 Haf A. Use minimum cross-section acc. to AC-1 rated value 4 Haf A. Use minimum cross-section acc. to AC-1 rated value 4 Haf A. Use minimum cross-section acc. to AC-1 rated value 4 Haf A. Use minimum cross-section acc. to AC-1 rated value 5 Haf A. Use minimum cross-section acc. to AC-1 rated value 5 Haf A. Use minimum cross-section acc. to AC-1 rated value 6 Haf A. Use minimum cross-section acc. to AC-1 rated value 6 Haf A. Use minimum cross-section acc. to AC-1 rated value 7 Haf A. Use minimum cross-section acc. to AC-1 rated value 6 Haf A. Use minimum cross-section acc. to AC-1 rated value 7 Haf A. Use minimum cross-section acc. to AC-1 rated value 7 Haf A. Use minimum cross-section acc. to AC-1 rated value 8 Haf A. Use minimum cross-section acc. to AC-1 rated value 9 Haf A. Use minimum cross-section acc. to AC-1 rated value 1 Haf A. Use minimum cross-section acc. to AC-1 rated value 1 Haf A. Use minimum cross-section acc. to AC-1 rated value 2 Haf A. Use minimum				
Initiated to 10 a switching at zero current maximum 2.08 & 1.08 minimum cross-section acc. to AC-1 rated value 1.07 minimum cross-section acc. to AC-	limited to 1 s switching at zero current maximum	4 000 A; Use minimum cross-section acc. to AC-1 rated value		
# limited to 30 switching at zero current maximum # limited to 30 switching at zero current maximum # limited to 30 switching at zero current maximum # limited to 30 switching at zero current maximum # sit AC # at DC # limited to 30 switching at zero current maximum # sit AC-2 maximum # sit AC-2 maximum # sit AC-3 m				
■ milmided to 801 & switching at zero current maximum	-			
Inches a whitching frequency	<u> </u>			
## AC 1000 th operating frequency ## AC-1 maximum 750 th ## AC-3 maximum 250 th ## AC-4 maximum 250 th ## AC-5 maximum 250 th ## AC-6 maximum 250 th ## AC		1 144 A; Use minimum cross-section acc. to AC-1 rated value		
## AC 1000 t/h operating requency ## AC-1 maximum				
operating frequency * at AC-3 maximum * at AC-4 maximum * at BC bet rated value * at BC bet rated val				
		1 000 1/h		
	• at AC-1 maximum			
	• at AC-2 maximum	250 1/h		
** AK-C4 maximum	• at AC-3 maximum	500 1/h		
Control circuit/ Control ACIDC control supply voltage at AC at 50 Hz rated value 21 27.3 V e at 60 Hz rated value 21 27.3 V control supply voltage at DC at 60 Hz rated value e rated value 21 27.3 V operating range factor control supply voltage rated value of magnet coil at DC 0.8 e infillal value 0.8 e infillal value 0.8 e infillal value 0.8 e for 0 Hz 0.8 1.1 e for 0 Hz 0.8 1.1 value of PLC-control input according to IEC 60947-1 Type 2 consumed current at PLC-control input according to IEC 60947-1 Type 2 consumed current at PLC-control input according to IEC 60947-1 Type 2 consumed current at PLC-control input according to IEC 60947-1 Type 2 consumed current at PLC-control input according to IEC 60947-1 Type 2 consumed current at PLC-control input according to IEC 60947-1 Type 2 consumed current at PLC-control input according to IEC 60947-1 Type 2 consumed current at PLC-control input according to IEC 60947-1 Type 2 consumed current at PLC-control input according to	• at AC-3e maximum	500 1/h		
type of voltage of the control supply voltage at AC - at 60 Hz rated value - at 60 Hz rated value - at 60 Hz rated value 21 27,3 V control supply voltage at DC - (rated value - (r		130 1/h		
control supply voltage at AC at 50 Hz rated value 21 27.3 V control supply voltage at DC crated value 0 rated value 0 rated value 0 perating range factor control supply voltage rated value of magnet coil at DC control supply voltage at DC crated value 0 perating range factor control supply voltage rated value of magnet coil at DC control supply voltage rated value 0 .8 at 11 control value at 12 27.3 V 0 .8 at 14 at 160 Hz at 160 Hz at 160 Hz bypo of PLC-control input according to IEC 69947-1 consumed current at PLC-control input according to IEC 69947-1 consumed current at PLC-control input according to IEC 69947-1 consumed current at PLC-control input according to IEC 69947-1 consumed current at PLC-control input according to IEC 69947-1 maximum voltage at PLC-control input according to IEC 69947-1 maximum voltage at PLC-control input according to IEC 69947-1 maximum voltage at PLC-control input according to IEC 69947-1 maximum voltage at PLC-control input according to IEC 69947-1 maximum voltage at PLC-control input according to IEC 69947-1 maximum voltage at PLC-control input according to IEC 69947-1 maximum voltage at PLC-control input according to IEC 69947-1 maximum voltage at PLC-control input according to IEC 69947-1 maximum voltage at PLC-control input according to IEC 69947-1 maximum voltage at PLC-control input according to IEC 69947-1 maximum voltage at PLC-control input according to IEC 69947-1 with variator voltage at PLC-control input according to IEC 69947-1 with variator voltage at PLC-control input according to IEC 69947-1 with variator voltage at PLC-control input according to IEC 69947-1 with variator voltage at PLC-control input according to IEC 69947-1 with variator voltage at PLC-control input according to IEC 69947-1 with variator voltage at PLC-control input according to IEC 69947-1 with variator voltage at PLC-control input according to IEC 69947-1 with variator voltage at PLC-control input according to IEC 69947-1 with variator voltage at PLC-control input according to	Control circuit/ Control			
• at 50 Hz rated value 21 27.3 V at 60 Hz rated value 6 each graph voltage rated value of magnet coil at DC at 60 Hz rated value 6 each graph voltage rated value of magnet coil at DC at 60 Hz rated value of magnet coil at AC at 60 Hz rate of 6047-1 maintain value at 60 Hz rate of 6047-1 maintain value 7 rate of 6047-1 rated value 7 rate of 6047-1 rated value 7 rate of 6047-1 rated value 7 rated value 7 rated value 7 rated value 8 rate of 6047-1 rated value 8 rate of 6047-1 rated value 9 rated 9 rated 9 rated value 9 rated value 9 rated 9	type of voltage of the control supply voltage	AC/DC		
• at 80 Hz rated value control supply voltage at DC - rated value 21 27.3 V poperating range factor control supply voltage rated value of magnet coil at DC - initial value - illul-scale value 0.8 - illul-scale valu	control supply voltage at AC			
control supply voltage at DC	• at 50 Hz rated value	21 27.3 V		
	at 60 Hz rated value	21 27.3 V		
operating range factor control supply voltage rated value of magnet coil at DC initial value 0.8 1.1 0.8 1.1 0.8 1.1 0.8 1.1 0.8 1.1 0.8 1.1 0.8 1.1 1.1 0.8 1.1 1.1 1.1 1.2 0.8 1.1 1	control supply voltage at DC			
minglet coll at DC • initial value 0.8 • intil-scale value 0.1.1 operating range factor control supply voltage rated value of magnet coll at AC • at 50 Hz 0.8 1.1 • yee of PLC-control input according to IEC 60947-1 type 2 consumed current at PLC-control input according to IEC 60947-1 type 2 consumed current at PLC-control input according to IEC 60947-1 type 2 consumed current at PLC-control input according to IEC 60947-1 type 2 consumed current at PLC-control input according to IEC 60947-1 type 2 consumed current at PLC-control input according to IEC 60947-1 type 2 consumed current at PLC-control input according to IEC 60947-1 type 2 consumed current at PLC-control input according to IEC 60947-1 type 2 consumed current at PLC-control input according to IEC 60947-1 type 2 consumed current at PLC-control input according to IEC 60947-1 type 2 consumed current at PLC-control input according to IEC 60947-1 type 2 consumed current at PLC-control input according to IEC 60947-1 type 2 consumed current at PLC-control input according to IEC 60947-1 type 2 type 2 type 4 PLC-control input according to IEC 60947-1 type 2 type 2 type 4 PLC-control input according to IEC 60947-1 type 2 type 4 PLC-control input according to IEC 60947-1 type 2 type 4 PLC-control input according to IEC 60947-1 type 2 type 4 PLC-control input according to IEC 60947-1 type 2 type 4 PLC-control input according to IEC 60947-1 type 2	rated value	21 27.3 V		
■ full-scale value Operating range factor control supply voltage rated value of magnet coil at AC ■ at 50 Hz ■ at 60 Hz Summed current at PLC-control input according to IEC 60947-1 Type 2 consumed current at PLC-control input according to IEC 60947-1 maximum voltage at PLC-control input rated value Operating range factor of the voltage at PLC-control input design of the surge suppressor with varistor apparent pick-up power of magnet coil at AC ■ at 50 Hz ■ at 60 Hz				
operating range factor control supply voltage rated value of magnet coil at AC at 50 Hz at 60 Hz type of PLC-control input according to IEC 60947-1 type 2 consumed current at PLC-control input according to IEC 60947-1 rype 2 20 mA voltage at PLC-control input rated value operating range factor of the voltage at PLC-control input design of the surge suppressor apparent pick-up power of magnet coil at AC at 50 Hz at 60 Hz at 50 Hz at 60 Hz ball ball ball ball ball ball ball bal	• initial value	0.8		
magnet coil at AC • at 50 Hz • at 60 Hz • at 60 Hz • at 60 Hz type of PLC-control input according to IEC 60947-1 type of PLC-control input according to IEC 60947-1 consumed current at PLC-control input according to IEC 60947-1 maximum voltage at PLC-control input rated value operating range factor of the voltage at PLC-control input design of the surge suppressor supparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz at 60 Hz at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz alt 60 Hz blick of the surge suppressor apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz alt 60 Hz blick of the surge suppressor alt 50 Hz • at 60 Hz blick of the surge suppressor alt 50 Hz • at 60 Hz blick of the surge suppressor alt 50 Hz • at 60 Hz closing power of magnet coil at AC • at 60 Hz closing power of magnet coil at DC bliding power of magnet coil at DC sat DC • at	full-scale value	1.1		
type of PLC-control input according to IEC 60947-1 consumed current at PLC-control input according to IEC 80947-1 voltage at PLC-control input rated value voltage at PLC-control input according to IEC voltage at Corollar value vith varistor apparent pick-up power of magnet coil at AC val 50 Hz val 60 Hz	● at 50 Hz	0.8 1.1		
consumed current at PLC-control input according to IEC 60947-1 maximum voltage at PLC-control input rated value operating range factor of the voltage at PLC-control input design of the surge suppressor apparent pick-up power of magnet coil at AC • at 50 Hz • at 60	• at 60 Hz	0.8 1.1		
voltage at PLC-control input rated value operating range factor of the voltage at PLC-control input design of the surge suppressor apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz 10 ductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz • at 60 Hz • at 60 Hz closing power of magnet coil at DC closing power of magnet coil at DC closing delay • at AC • at DC • at DC • at DC • at DC • arcing time control version of the switch operating mechanism Auxiliary direvit number of NC contacts for auxiliary contacts instantaneous contact number of NC contacts for auxiliary contacts instantaneous 2 contact number of NC contacts for auxiliary contacts instantaneous 2	type of PLC-control input according to IEC 60947-1	Type 2		
operating range factor of the voltage at PLC-control input design of the surge suppressor apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz closing power of magnet coil at DC blolding power of magnet coil at DC closing delay • at AC • at DC • at CC •		20 mA		
design of the surge suppressor apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz • at 60 Hz • at 60 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz • at 60 Hz Closing power of magnet coil at DC bloiding power of magnet coil at DC closing power of magnet coil at DC sat AC • at AC • at DC • at DC	voltage at PLC-control input rated value	24 V		
apparent pick-up power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with closing power of the coil • at 50 Hz • at 60 Hz • at 60 Hz apparent holding power of magnet coil at AC • at 60 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz closing power of magnet coil at DC tolding power of magnet coil at DC sat AC • at AC • at AC • at AC • at DC sat SDV sat SDV sat SDV sat SDV sat SDV sat SDV s	operating range factor of the voltage at PLC-control input	0.8 1.1		
at 50 Hz at 60 Hz at 50 Hz binductive power factor with closing power of the coil at 50 Hz at 50 Hz binductive power of magnet coil at AC at 60 Hz binductive power factor with the holding power of the coil at 50 Hz binductive power factor with the holding power of the coil at 50 Hz binductive power factor with the holding power of the coil at 50 Hz binductive power of magnet coil at DC binductive power of magnet coil at DC binding	design of the surge suppressor	with varistor		
at 60 Hz inductive power factor with closing power of the coil at 50 Hz at 60 Hz at 50 Hz at 60 Hz but at 50 Hz at 50 Hz at 60 Hz at 50 Hz at 60 Hz but at 50 Hz at 60 Hz closing power of magnet coil at DC bolding power of magnet coil at DC closing power of magnet coil at DC at AC bolding power of magnet coil at DC at AC at AC at AC at AC bolding power of magnet coil at DC at AC at AC at AC bolding bol	apparent pick-up power of magnet coil at AC			
inductive power factor with closing power of the coil at 50 Hz at 60 Hz apparent holding power of magnet coil at AC at 50 Hz at 60 Hz at 60 Hz at 60 Hz but 60 Hz at 50 Hz at 60 Hz at 50 Hz at 60 Hz closing power of magnet coil at DC bolding power of magnet coil at DC bolding power of magnet coil at DC closing delay at AC at A	• at 50 Hz	530 VA		
at 50 Hz at 60 Hz apparent holding power of magnet coil at AC at 50 Hz at 60 Hz at 60 Hz at 60 Hz but for Hz at 60 Hz closing power of magnet coil at DC but folding power of magnet coil at DC but folding power of magnet coil at DC but folding power of magnet coil at DC closing delay at AC at	• at 60 Hz	530 VA		
apparent holding power of magnet coil at AC at 50 Hz at 60 Hz at 50 Hz at 60 Hz build at 50 Hz at 60 Hz at 50 Hz at 60 Hz at 50 Hz at 60 Hz build at 50 Hz at 60 Hz build at 50 Hz at 60 Hz closing power of magnet coil at DC building power of magnet coil at DC closing delay at AC building buil	inductive power factor with closing power of the coil			
apparent holding power of magnet coil at AC • at 50 Hz • at 60 Hz inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz • at 60 Hz • at 60 Hz • at 60 Hz Closing power of magnet coil at DC holding power of magnet coil at DC closing delay • at AC • at DC • at DC • at DC at DC st. 80 ms opening delay • at AC • at DC • at DC arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous 2	● at 50 Hz	0.8		
at 50 Hz at 60 Hz at 60 Hz at 50 Hz at 50 Hz at 60 Hz but 60 Hz at 50 Hz at 60 Hz at 60 Hz but 60 Hz closing power of magnet coil at DC but 60 Hg magnet coil at DC but 6		0.8		
at 60 Hz inductive power factor with the holding power of the coil at 50 Hz at 60 Hz 0.4 closing power of magnet coil at DC holding power of magnet coil at DC closing delay at AC at DC at DC 45 80 ms opening delay at AC at DC at DC 80 100 ms arcing time control version of the switch operating mechanism Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous 2	apparent holding power of magnet coil at AC			
inductive power factor with the holding power of the coil • at 50 Hz • at 60 Hz closing power of magnet coil at DC holding power of magnet coil at DC closing delay • at AC • at DC • at DC • at AC • at DC • at D	● at 50 Hz	8.5 VA		
at 50 Hz at 60 Hz closing power of magnet coil at DC bolding power of magnet coil at DC closing delay at AC at DC at AC at AC at AC at AC bolding delay at AC at AC at AC at AC at AC bolding delay bolding delay at AC bolding delay at AC bolding delay bolding delay at AC bolding delay bolding delay bolding delay at AC bolding delay bolding de	● at 60 Hz	8.5 VA		
otosing power of magnet coil at DC holding power of magnet coil at DC closing delay ot AC ot DC otening delay ot AC oth AC	inductive power factor with the holding power of the coil			
closing power of magnet coil at DC holding power of magnet coil at DC closing delay • at AC • at DC 45 80 ms opening delay • at AC • at DC 80 100 ms • at DC arcing time 10 15 ms control version of the switch operating mechanism PLC-IN or Standard A1 - A2 (adjustable) Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous 2	● at 50 Hz	0.4		
holding power of magnet coil at DC closing delay at AC at DC 45 80 ms opening delay at AC at AC at DC 80 100 ms arcing time 10 15 ms control version of the switch operating mechanism PLC-IN or Standard A1 - A2 (adjustable) Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous 2	• at 60 Hz	0.4		
closing delay • at AC • at DC • at AC • at DC • at AC • at DC • at D	closing power of magnet coil at DC	580 W		
 at AC at DC 45 80 ms opening delay at AC at DC at DC at DC at DC at DC arcing time control version of the switch operating mechanism PLC-IN or Standard A1 - A2 (adjustable) Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous 2 	holding power of magnet coil at DC	3.4 W		
at DC opening delay at AC at DC at	closing delay			
opening delay	• at AC	45 80 ms		
at AC at DC at DC acring time 10 15 ms control version of the switch operating mechanism PLC-IN or Standard A1 - A2 (adjustable) Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous 2	• at DC	45 80 ms		
● at DC arcing time 10 15 ms control version of the switch operating mechanism PLC-IN or Standard A1 - A2 (adjustable) Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous 2	opening delay			
arcing time 10 15 ms control version of the switch operating mechanism PLC-IN or Standard A1 - A2 (adjustable) Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous 2	• at AC	80 100 ms		
control version of the switch operating mechanism PLC-IN or Standard A1 - A2 (adjustable) Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous 2	• at DC	80 100 ms		
Auxiliary circuit number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous 2	arcing time	10 15 ms		
number of NC contacts for auxiliary contacts instantaneous contact number of NO contacts for auxiliary contacts instantaneous 2	control version of the switch operating mechanism	PLC-IN or Standard A1 - A2 (adjustable)		
contact 2 number of NO contacts for auxiliary contacts instantaneous 2	Auxiliary circuit			
		2		
		2		

operational current at AC 42 maximum	10 A		
operational current at AC-12 maximum	10 A		
operational current at AC-15 • at 230 V rated value	6 A		
at 400 V rated value			
	3 A		
at 500 V rated value	2 A		
at 690 V rated value	1 A		
operational current at DC-12	40.4		
• at 24 V rated value	10 A		
• at 48 V rated value	6 A		
• at 60 V rated value	6 A		
• at 110 V rated value	3 A		
• at 125 V rated value	2 A		
• at 220 V rated value	1A		
• at 600 V rated value	0.15 A		
operational current at DC-13	40.4		
• at 24 V rated value	10 A		
• at 48 V rated value	2 A		
• at 60 V rated value	2 A		
• at 110 V rated value	1A		
• at 125 V rated value	0.9 A		
• at 220 V rated value	0.3 A		
• at 600 V rated value	0.1 A		
contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)		
UL/CSA ratings			
full-load current (FLA) for 3-phase AC motor			
at 480 V rated value	180 A		
at 600 V rated value	192 A		
yielded mechanical performance [hp]			
 for 3-phase AC motor 			
— at 200/208 V rated value	60 hp		
— at 220/230 V rated value	75 hp		
— at 460/480 V rated value	150 hp		
— at 575/600 V rated value	200 hp		
contact rating of auxiliary contacts according to UL	A600 / Q600		
Short-circuit protection			
design of the fuse link			
 for short-circuit protection of the main circuit 			
 — with type of coordination 1 required 	gG: 500 A (690 V, 100 kA)		
— with type of assignment 2 required	gG: 400 A (690 V, 100 kA), aM: 315 A (690 V, 50 kA), BS88: 400 A (415 V, 50		
a for abort aircuit protection of the auxiliary autitab required	kA)		
for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions	gG: 10 A (500 V, 1 kA)		
Installation/ mounting/ dimensions	with vertical mounting ourface 1/00° relateble with vertical resulting our		
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back		
fastening method	screw fixing		
side-by-side mounting	Yes		
height	210 mm		
width	145 mm		
depth	202 mm		
required spacing			
with side-by-side mounting			
— forwards	20 mm		
— upwards	10 mm		
— downwards	10 mm		
— at the side	0 mm		
for grounded parts			
— forwards	20 mm		
— upwards	10 mm		
— at the side	10 mm		
— downwards	10 mm		
for live parts			
Fior tive parte			

— forwards	20 mm
— upwards	10 mm
— dpwards — downwards	10 mm
— at the side	10 mm
Connections/ Terminals	TO THIN
type of electrical connection	O
for main current circuit	Connection bar
for auxiliary and control circuit	spring-loaded terminals
at contactor for auxiliary contacts	Spring-type terminals
• of magnet coil	Spring-type terminals
width of connection bar	25 mm
thickness of connection bar	6 mm
diameter of holes	11 mm
number of holes	1
connectable conductor cross-section for main contacts	
• stranded	70 240 mm²
connectable conductor cross-section for auxiliary contacts	
 solid or stranded 	0.25 2.5 mm²
 finely stranded with core end processing 	0.25 1.5 mm ²
finely stranded without core end processing	0.25 2.5 mm²
type of connectable conductor cross-sections	
 for auxiliary contacts 	
— solid	2x (0.25 2.5 mm²)
— solid or stranded	2x (0,25 2,5 mm²)
 finely stranded with core end processing 	2x (0.25 1.5 mm²)
 finely stranded without core end processing 	2x (0.25 2.5 mm²)
for AWG cables for auxiliary contacts	2x (24 14)
AWG number as coded connectable conductor cross section	
 for auxiliary contacts 	24 14
Safety related data	
product function	
 mirror contact according to IEC 60947-4-1 	Yes
 positively driven operation according to IEC 60947-5-1 	No
B10 value with high demand rate according to SN 31920	1 000 000
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP00; IP20 with box terminal/cover
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with box terminal/cover
suitability for use	
 safety-related switching OFF 	Yes
Certificates/ approvals	
General Product Approval	





Confirmation



<u>KC</u>



Functional
EMC Safety/Safety of Machinery Declaration of Conformity Test Certificates



Type Examination Certificate



C (

Special Test Certificate

Type Test Certificates/Test Report

Marine / Shipping other













other			Railway	
Confirmation	Confirmation	Miscellaneous	Special Test Certificate	Vibration and Shock

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1064-2NB36

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1064-2NB36

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RT1064-2NB36

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1064-2NB36&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RT1064-2NB36/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RT1064-2NB36&objecttype=14&gridview=view1







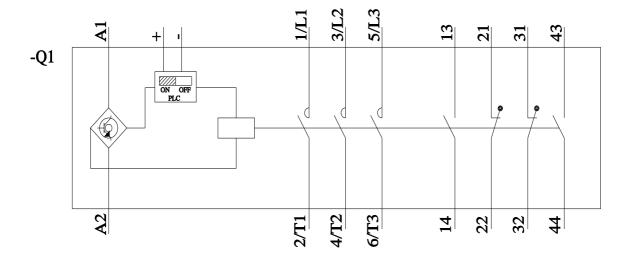

last modified: 3/29/2023 🖸