SIEMENS

Data sheet

US2:LCE01C402208A

Electrically held lighting contactor, (convertible to mech. held), Amp rating 30A (tungsten 20A), 4 N.C. / 2 N.O. poles, 200-208V 60Hz coil, Non-combination type, Enclosure NEMA type 1, Indoor general purpose use



product Value Value Observed design of the product Electrically held ighting contactor (convertible to mechanically held) special product feature Electrically held convertible to mechanically held, Power poles convertible between NO and C design of the product Electrically held convertible to mechanically held, Power poles convertible between NO and C design of the product Electrically held convertible to mechanically held, Power poles convertible between NO and C device the product feature The both Polescon NO and C helght X Widh X Deph [in] 11 hb touch protection against electrical shock NA for enclosed products installation attrude [it] at height above see level maximum 6600 h ambient temperature [it] -22 +140 "F • during storage -30 +65 "C • during storage -30 +65 "C • during operation -22 +40 "F size of contactor 30 Amp number of NC contacts for main contacts 2 number of NC contacts for main contacts 4 operating voltage for main contacts 100000 viate divisite 20A @277V to pth rath loctron balast (1 pole per 1 phase) rated value	product brand name	Class LC
special product feature Electrically held convertible to mechanically held; Power poles convertible between NO and NC General technical data 11 Weight [Ib] 11 Height X Width X Depth [In] 14 × 8 × 7 in Usch protection against electrical shock NA for enclosed products installation altitude [If] at height above sea level maximum 6660 ft ambient temperature [F] -22 +149 °F • during operation -13 +104 °F ambient temperature -30 +65 °C • during operation -25 +40 °C country of origin USA Contactor 30 Amp number of NC contacts for main contacts 2 number of NC contacts for main contacts 2 Type of main current circuit at AC at 60 Hz 600 V maximum 600 V * attingsten (1 pole per 1 phase) rated value 20A @277V 1p 1ph • attingsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • attingsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • attingsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at tangsten (1 pole per 1 phase) rated val	•	
Between NO and NC Ceneral technical data weight [b] 11 lb Height x Width x Depth [in] 14 x 8 x 7 in Touch protection against electrical shock NA for enclosed products installation alight above sea level maximum 6660 ft ambient temperature [*F] -22 +149 *F • during storage -22 +149 *F • during storage -30 +65 *C • during storage -30 +65 *C • during storage -30 +65 *C • during operation -25 +40 *C country of ongin USA Contactor 30 Amp number of NC contacts for main contacts 2 number of NC contacts for main contacts 4 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 100000 Type of main contacts 9 contact rating of the main contacts 100000 vitie electronic ballast (LE driver] (1 pole per 1 phase) 104 @2120V / 3A @277V 1p 1ph eat tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph eat tungsten (2 poles per 1 phase) rated value		
weight [lb] 11 lb Height x Widh x Depth [in] 14 × 8 × 7 in touch protection against electrical shock NA for enclosed products installation altitude [lt] at height above sea level maximum 6660 ft ambient temperature ['F] - • during storage -22 +149 °F • during operation -13 +104 °F ambient temperature - • during operation -25 +40 °C country of origin USA Contactor 30 Amp number of NC contacts for main contacts 2 number of NC contacts for main contacts 4 operating voltage for main contacts 4 operating voltage for main contacts 100000 Type of main contacts 100000 recharce service life (operating cycles) of the main contacts 100000 exit ungsten (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @200V 2p 1ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph <td>special product leature</td> <td></td>	special product leature	
Height XWidh x Depth [in] 14 × 8 × 7 in touch protection against electrical shock NA for enclosed products installation attitude [ft] at height above sea level maximum 6560 ft ambient temperature [F] - • during storage -22 +149 °F • during operation -13 +104 °F ambient temperature - • during operation -25 +40 °C country of origin USA Contactor 30 Amp number of NC contacts for main contacts 2 number of NC contacts for main contacts 4 operating voltage for main contacts 4 operating voltage for main contacts 4 operating voltage for main contacts 100000 vibrial evolue 10A @120V / 3A @277V 1p 1ph rated value 20A @480V 2p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 3p 3ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 3p 3ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 3p 3ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 3p 3ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 3p 3ph	General technical data	
Touch protection against electrical shock NA for enclosed products installation altitude [ft] at height above sea level maximum 6560 ft ambient temperature [F]	weight [lb]	11 lb
Installation altitude [ft] at height above sea level maximum 6660 ft ambient temperature ['F] -22 +149 "F • during operation -13 +104 "F ambient temperature -30 +65 °C • during operation -25 +10 "F contactor 30 Amp number of NO contacts for main contacts 2 number of NO contacts for main contacts 2 number of NO contacts for main contacts 4 operating voltage for main current circuit at AC at 60 Hz 600 V maximum Silver alloy, double break 100000 Type of main contacts Silver alloy, double break 100000 vibrale file (operating cycles) of the main contacts 100000 vibrale data (2 poles per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 3p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at balast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at balast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at balast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at balast (2 poles per 1 phase) rated value 30A @600V 3p 3ph	Height x Width x Depth [in]	14 × 8 × 7 in
amblent temperature [*F] -22 +149 *F • during operation -13 +104 *F amblent temperature -30 +65 *C • during operation -25 +40 *C country of origin USA Contactor 30 Amp number of NO contacts for main contacts 2 number of NO contacts for main contacts 4 operating voltage for main contacts 4 operating voltage for main contacts 100 V maximum Silver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 vpical 100000 out at tungsten (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at	touch protection against electrical shock	NA for enclosed products
• during storage -22 +149 °F • during operation -13 +104 °F ambient temperature -13 +104 °F • during operation -25 +40 °C country of origin USA Contactor 30 Amp size of contactor 30 Amp number of NC contacts for main contacts 2 number of NC contacts for main contacts 4 operating voltage for main current circuit at AC at 60 Hz 600 V maximum for addition of the main contacts Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 vitil electronic ballast [LED driver] (1 pole per 1 phase) 10A @120V / 3A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 3ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at tabilast (2 poles per 1 phase) rated value <td>installation altitude [ft] at height above sea level maximum</td> <td>6560 ft</td>	installation altitude [ft] at height above sea level maximum	6560 ft
• during operation -13 +104 "F ambient temperature -30 +65 °C • during operation -25 +40 °C country of origin USA Contactor 30 Amp number of NC contacts for main contacts 2 number of NC contacts for main contacts 4 operating voltage for main current circuit at AC at 60 Hz 600 V maximum Type of main contacts 100000 Type of main contacts 5ilver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 vib the electronic ballast [LED driver] (1 pole per 1 phase) 10A @120V / 3A @277V 1p 1ph at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at resistive load (2 poles per 1 phase) rated value	ambient temperature [°F]	
ambient temperature -30 +65 °C • during storage -30 +65 °C • during operation -25 +40 °C country of origin USA Size of contactor 30 Amp number of NO contacts for main contacts 2 number of NC contacts for main contacts 4 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 51/20 contacts Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 vpirating of the main contacts of lighting contactor 10A @120V / 3A @277V 1p 1ph eat tungsten (1 pole per 1 phase) rated value 20A @480V 2p 1ph eat tungsten (2 poles per 3 phases) rated value 20A @480V 2p 1ph eat ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph eat ballast (3 poles per 3 phases) rated value 30A @600V 2p 1ph eat ballast (3 poles per 1 phase) rated value 30A @600V 3p 3ph eat resistive load (1 pole per 1 phase) rated value 30A @600V 3p 3ph eat resistive load (2 poles per 1 phase) rated value 30A @600V 3p 3ph eat resistive load (2 poles per 1 phase) rated value 30A @600V 3p 3ph <tr< td=""><td>during storage</td><td>-22 +149 °F</td></tr<>	during storage	-22 +149 °F
• during storage -30 +65 °C • during operation -25 +40 °C country of origin USA Contactor 30 Amp number of NC contacts for main contacts 2 number of NC contacts for main contacts 4 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 100000 Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 vpiral 100000 value 20A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 3p 3ph • at ballast (2 poles per 3 phases) rated value 20A @347V 1p 1ph • at ballast (1 pole per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph </td <td> during operation </td> <td>-13 +104 °F</td>	 during operation 	-13 +104 °F
• during operation -25 +40 °C country of origin USA Contactor 30 Amp number of NO contacts for main contacts 2 number of NC contacts for main contacts 2 operating voltage for main current circuit at AC at 60 Hz 600 V maximum Silver alloy, double break Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 typical 100000 contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value at tungsten (1 pole per 1 phase) rated value 20A @277V 1p 1ph at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph at ballast (3 poles per 3 phases) rated value 30A @600V 3p 3ph at resistive load (1 pole per 1 phase) rated value 30A @600V 3p 3ph at resistive load (2 poles per 1 phase) rated value 30A @600V 3p 3ph at ballast (3 poles per 3 phases) rated value 30A @600V 3p 3ph at resistive load (2 poles per 3 phases) rated val	ambient temperature	
country of origin USA Contactor 30 Amp number of NO contacts for main contacts 2 number of NC contacts for main contacts 4 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 5liver alloy, double break Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 vipical contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) 10A @120V / 3A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 3p 3ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at resistive load (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at resistive load (2 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (2 poles per 3 phases) rated value 30A @600V 3p 3ph	during storage	-30 +65 °C
Contactor 30 Amp number of NO contacts for main contacts 2 number of NC contacts for main contacts 4 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 600 V Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 vipical contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 3p 3ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (3 poles per 3 phases) rated value 30A @600V 2p 1ph • at resistive load (1 pole per 1 phase) rated value 30A @600V 3p 3ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at resistive load (2 poles per 3 phases) rated value 30A @600V 3p 3ph <td>during operation</td> <td>-25 +40 °C</td>	during operation	-25 +40 °C
size of contactor 30 Amp number of NO contacts for main contacts 2 number of NC contacts for main contacts 4 operating voltage for main current circuit at AC at 60 Hz maximum 600 V Type of main contacts 5ilver alloy, double break mechanical service life (operating cycles) of the main contacts typical 100000 contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value 10A @120V / 3A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @2477V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (3 poles per 3 phases) rated value 30A @600V 3p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load	country of origin	USA
number of NO contacts for main contacts 2 number of NC contacts for main contacts 4 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 500 V Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 typical 100000 contact rating of the main contacts of lighting contactor • • with electronic ballast [LED driver] (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (1 pole per 1 phase) rated value 30A @600V 3p 3ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph </td <td>Contactor</td> <td></td>	Contactor	
number of NC contacts for main contacts 4 operating voltage for main current circuit at AC at 60 Hz 600 V Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) • at tungsten (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (3 poles per 3 phases) rated value 30A @347V 1p 1ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 3 phases) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (3 poles per 3 phases) r	size of contactor	30 Amp
operating voltage for main current circuit at AC at 60 Hz600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor10A @120V / 3A @277V 1p 1phe at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1phe at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1phe at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3phe at ballast (1 pole per 1 phase) rated value30A @600V 2p 1phe at ballast (2 poles per 3 phases) rated value30A @600V 2p 1phe at ballast (2 poles per 1 phase) rated value30A @600V 2p 1phe at ballast (2 poles per 1 phase) rated value30A @600V 2p 1phe at ballast (2 poles per 1 phase) rated value30A @600V 2p 1phe at resistive load (1 pole per 1 phase) rated value30A @600V 3p 3phe at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3phe at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3phe at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3phAuxiliary contact30A @600V 3p 3phAuxiliary contacts0number of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0	number of NO contacts for main contacts	2
maximumSilver alloy, double breakType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor0000• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• Auxiliary contact0number of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0	number of NC contacts for main contacts	4
mechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (2 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load for auxiliary contacts0number of NO contacts for auxiliary contacts0		600 V
typicalcontact rating of the main contacts of lighting contactor• with electronic ballast [LED driver] (1 pole per 1 phase) rated value• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value20A @480V 2p 1ph• at ballast (2 poles per 1 phase) rated value20A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value• auther of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0	Type of main contacts	Silver alloy, double break
• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at mumber of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0		100000
rated value20A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @480V 2p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 3p 3ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• number of NC contacts for auxiliary contacts0• number of NO contacts for auxiliary contacts0	contact rating of the main contacts of lighting contactor	
• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• Auxiliary contact30A @600V 3p 3phnumber of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0		10A @120V / 3A @277V 1p 1ph
• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3phAuxiliary contact30A @600V 3p 3phnumber of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0	 at tungsten (1 pole per 1 phase) rated value 	20A @277V 1p 1ph
• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• number of NC contacts for auxiliary contacts0• number of NO contacts for auxiliary contacts0	 at tungsten (2 poles per 1 phase) rated value 	20A @480V 2p 1ph
• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5p output o	 at tungsten (3 poles per 3 phases) rated value 	20A @480V 3p 3ph
 at ballast (3 poles per 3 phases) rated value at resistive load (1 pole per 1 phase) rated value at resistive load (2 poles per 1 phase) rated value at resistive load (2 poles per 1 phase) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value <l< td=""><td> at ballast (1 pole per 1 phase) rated value </td><td>30A @347V 1p 1ph</td></l<>	 at ballast (1 pole per 1 phase) rated value 	30A @347V 1p 1ph
• at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact 30A @600V 3p 3ph number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at ballast (2 poles per 1 phase) rated value 	30A @600V 2p 1ph
• at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact 30A @600V 3p 3ph number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at ballast (3 poles per 3 phases) rated value 	30A @600V 3p 3ph
terisitive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts 0	 at resistive load (1 pole per 1 phase) rated value 	30A @600V 1p 1ph
Auxiliary contact number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at resistive load (2 poles per 1 phase) rated value 	30A @600V 2p 1ph
number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	• at resistive load (3 poles per 3 phases) rated value	30A @600V 3p 3ph
number of NO contacts for auxiliary contacts 0	Auxiliary contact	
	number of NC contacts for auxiliary contacts	0
number of total auxiliary contacts maximum 4	number of NO contacts for auxiliary contacts	0
	number of total auxiliary contacts maximum	4

contact rating of auxiliary contacts of contactor according to UL	NA
Coil	
type of voltage of the control supply voltage	AC
control supply voltage	
at AC at 60 Hz rated value	200 208 V
apparent pick-up power of magnet coil at AC	248 VA
apparent holding power of magnet coil at AC	28 VA
operating range factor control supply voltage rated value of magnet coil	0.85 1.1
Enclosure	
degree of protection NEMA rating of the enclosure	NEMA Туре 1
design of the housing	indoors, usable on a general basis
Mounting/wiring	
mounting position	Vertical
fastening method	Surface mounting and installation
type of electrical connection for supply voltage line-side	Screw-type terminals
tightening torque [lbf·in] for supply	35 35 lbf·in
type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded	2x (14 8 AWG)
temperature of the conductor for supply maximum permissible	75 °C
material of the conductor for supply	CU
type of electrical connection for load-side outgoing feeder	Screw-type terminals
tightening torque [lbf·in] for load-side outgoing feeder	35 35 lbf·in
type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded	2x (14 8 AWG)
temperature of the conductor for load-side outgoing feeder maximum permissible	75 °C
material of the conductor for load-side outgoing feeder	CU
type of electrical connection of magnet coil	Screw-type terminals
tightening torque [lbf·in] at magnet coil	15 15 lbf·in
type of connectable conductor cross-sections of magnet coil for AWG cables single or multi-stranded	2x (18 14 AWG)
temperature of the conductor at magnet coil maximum permissible	75 °C
material of the conductor at magnet coil	CU
Short-circuit current rating	
design of the fuse link for short-circuit protection of the main circuit required	100kA@600V (Class R or J 40A max)
design of the short-circuit trip	Thermal magnetic circuit breaker
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	24 kA
• at 480 V	65 kA
• at 600 V	25 kA
certificate of suitability	NEMA ICS 2; UL 508
Further information	

Industrial Controls - Product Overview (Catalogs, Brochures,...)

www.usa.siemens.com/iccatalog

Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:LCE01C402208A

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/US/en/ps/US2:LCE01C402208A

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:LCE01C402208A&lang=en

Certificates/approvals

https://support.industry.siemens.com/cs/US/en/ps/US2:LCE01C402208A/certificate



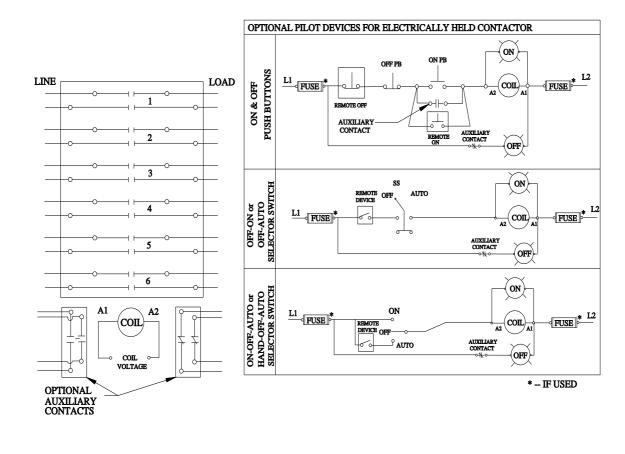

D38297001

last modified:

4/5/2023 🖸

7/10/2023