SIEMENS

Data sheet

US2:LCE01C408240A

Electrically held lighting contactor, (convertible to mech. held), Amp rating 30A (tungsten 20A), 4 N.C. / 8 N.O. poles, 230-240V 60Hz/220V 50Hz coil, Noncombination type, Enclosure NEMA type 1, Indoor general purpose use



| product brand name Class LC design of the product Electrically held lighting contactor (convertible to mechanically held) general technical data Electrically held convertible to mechanically held. Power poles convertible between NO and NC weight [b] 12 lb Height x Width x Depth [n] 14 × 8 × 7 in Stock protection against electrical shock NA for enclosed products installation altitude [ft] at height above sea level maximum 6660 ft ambient temperature [rF] -3+104 °F - during operation -3+104 °F - during operation -25+40 °C - during operation -25+40 °C contactor 30 Amp number of NC contacts for main contacts 4 operating voltage for main contacts 4 optication fill (perating cycles) of the main contacts 5/// 40000 ow with electrical sholes per 1 phase) rated value 20A @277V 1p 1ph et utingsten (2 poles per 1 phase) rated value 20A @400V 2p 1ph et ubigsten (2 poles per 1 phase) rated value 30A @600V 2p 1ph et a ballast (2 poles per 1 phase) rated value 30A @600V 2p 3ph et a ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph et a ballast (2 poles per 1 phase) rated value 30A @600V 2p 3ph et a ballast (2 poles per 1 phase) rated value <th></th> <th></th> | | |
|---|--|---|
| special product feature Electrically held convertible to mechanically held; Power poles convertible General technical data Image: Ima | product brand name | Class LC |
| Between NO and NC General technical data weight [b] 12 lb Height x Width x Depth [in] 14 x 8 x 7 in Touch protection against electrical shock NA for enclosed products installation atlinked [it] at height above sea level maximum 6660 ft ambient temperature ['F] -22+149 'F • during storage -22+149 'F • during storage -30+65 'C • during storage -30 Amp numb | design of the product | Electrically held lighting contactor (convertible to mechanically held) |
| weight [lb] 12 lb Height x Width x Depth [in] 14 × 8 × 7 in touch protection against electrical shock NA for enclosed products installation altitude [it] at height above sea level maximum 6660 ft ambient temperature [iF] - • during operation -13 +104 °F ambient temperature - • luring operation -25 +40 °C country of origin USA Contactor 30 Amp size of contactor 30 Amp number of NC contacts for main contacts 8 number of NC contacts for main contacts 4 operating voltage for main contacts 100000 Type of main contacts 100000 vipial 100000 vipial 20A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @20V / 3A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @600V 2p 1ph • at ballast (1 pole per 1 pha | special product feature | |
| Height XWidh x Depth [in] 14 x 8 x 7 in touch protection against electrical shock NA for enclosed products installation altitude [ft] at height above sea level maximum 6560 ft ambient temperature [°F] -22 +149 °F • during operation -13 +104 °F ambient temperature -23 +169 °C • during operation -25 +40 °C • during operation -25 +40 °C • during operation -25 +40 °C • outring on contacts 8 number of NO contacts for main contacts 4 operating voltage for main current circuit at AC at 60 Hz 6000 V | General technical data | |
| Jouch protection against electrical shock NA for enclosed products installation altitude [ft] at height above sea level maximum 6560 ft ambient temperature ['F] - • during storage -13 +104 "F ambient temperature -13 +104 "F ambient gopration -13 +104 "F ambient gopration -25 +40 °C country of origin USA Contactor 30 Amp size of contacts for main contacts 8 number of NC contacts for main contacts 8 number of NC contacts for main contacts 8 number of NC contacts for main contacts 10000 Type of main contacts 5liver alloy, double break mechanical service life (operating cycles) of the main contacts 10000 vith electronic ballast [LED driver] (1 pole per 1 phase) 104 @120V / 34 @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at ballast (1 pole per 1 phase) rated value 20A @480V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph < | weight [lb] | 12 lb |
| Installation altitude [ft] at height above sea level maximum 6660 ft ambient temperature ['F] -22 +149 "F • during operation -13 +104 "F ambient temperature -30 +65 °C • during operation -25 +40 °C country of origin USA Contactor 30 Amp size of contacts for main contacts 8 number of NC contacts for main contacts 4 operating voltage for main current circuit at AC at 60 Hz 500 V maximum Silver alloy, double break 100000 Type of main contacts Silver alloy, double break 100000 contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) 10A @120V / 3A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 3p 1ph 20A @480V 3p 3ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 3p 3ph 30A @600V 2p 1ph • at balast (2 poles per 1 phase) rated value 30A @400V 3p 3ph 30A @400V 3p 3ph • at balast (2 poles per 1 phase) rated value 30A @400V 3p 3ph 30A @400V 3p 3ph • at balast (2 poles per 1 phase) rated value 30A @400V 3p 3ph 30A @400V 3p 3ph <td>Height x Width x Depth [in]</td> <td>14 × 8 × 7 in</td> | Height x Width x Depth [in] | 14 × 8 × 7 in |
| amblent temperature [*F] during storage 22 +149 *F during operation 13 +104 *F amblent temperature during operation 25 +40 *C country of origin USA Contactor ablent temperature during operation 25 +40 *C country of origin USA Contactor ablent temperature during operation 25 +40 *C country of origin USA Contactor available temperature during operation during to rigin during operation during to rigin during to rigin (2 poles por 1 phase) rated value during to rigin (2 poles per 1 phase) rated value during to rigin (2 poles per 1 phase) rated value during temperature during temperature during tenvice life (operat | touch protection against electrical shock | NA for enclosed products |
| • during storage -22 +149 °F • during operation -13 +104 °F ambient temperature -13 +104 °F • during operation -25 +65 °C • during operation -25 +40 °C country of origin USA Contactor 30 Amp size of contactor main contacts 8 number of NC contacts for main contacts 4 operating voltage for main current circuit at AC at 60 Hz 600 V maximum food V maximum 100000 Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 • with electronic ballast [LED driver] (1 pole per 1 phase) 10A @120V / 3A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 3p 3ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 3p 3ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballas | installation altitude [ft] at height above sea level maximum | 6560 ft |
| • during operation -13 +104 "F ambient temperature -30 +65 °C • during operation -25 +40 °C country of origin USA Contactor 30 Amp number of NC contacts for main contacts 8 operating voltage for main contacts 4 operating voltage for main current circuit at AC at 60 Hz 600 V maximum Type of main contacts 100000 Type of main contacts of the main contacts 100000 extent rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at ballast (1 pole per 1 phase) rated value 30A @000V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @000V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @000V 3p 3ph • at resistive load (2 poles per 1 phase) rated value 30A @000V 3p 3ph • at resistive load (2 poles per 1 phase) rated value 30A @000V 3p 3ph • at resistive load (2 poles per 1 phase) rated value 30A @000V 3p 3ph • at resistive load (2 poles per 1 phase) rated value 30A @000V 3 | ambient temperature [°F] | |
| ambient temperature -30 +65 °C • during storage -30 +65 °C • during operation -25 +40 °C country of origin USA Contactor 30 Amp number of NO contacts for main contacts 8 number of NC contacts for main contacts 4 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 10000 Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts 10000 vpriate value 20A @277V 1p 1ph e at tungsten (1 pole per 1 phase) rated value 20A @480V 2p 1ph e at tungsten (2 poles per 3 phases) rated value 20A @480V 2p 1ph e at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph e at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph e at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph e at resistive load (1 pole per 1 phase) rated value 30A @600V 3p 3ph e at resistive load (2 poles per 1 phase) rated value 30A @600V 3p 3ph e at resistive load (2 poles per 1 phase) rated value 30A @600V 3p 3ph e at resistive load (2 poles per 1 phase) rated v | during storage | -22 +149 °F |
| • during storage -30 +65 °C • during operation -25 +40 °C country of origin USA Contactor 30 Amp number of NC contacts for main contacts 8 number of NC contacts for main contacts 4 operating voltage for main contacts 50 V maximum 600 V Type of main contacts 50 V maximum 100000 typical 100000 contact rating of the main contacts 100000 viste of contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value 10A @120V / 3A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 3p 3ph • at ballast (2 poles per 1 phase) rated value 20A @480V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at resistive load (1 pole per 1 phase) rated value 30A @600V 3p 3ph <td>during operation</td> <td>-13 +104 °F</td> | during operation | -13 +104 °F |
| • during operation -25 +40 °C country of origin USA Contactor 30 Amp number of NC contacts for main contacts 8 number of NC contacts for main contacts 4 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 5ilver alloy, double break Type of main contacts 100000 typical 100000 contact rating of the main contacts 100000 • with electronic ballast [LED driver] (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 3ph • at ballast (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at resistive load (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at resistive | ambient temperature | |
| country of origin USA Contactor 30 Amp number of NO contacts for main contacts 8 number of NC contacts for main contacts 4 operating voltage for main current circuit at AC at 60 Hz 600 V maximum Silver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 typical 10000 contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value • at tungsten (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at ballast (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at ballast (2 poles per 1 phase) rated value 20A @480V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (3 poles per 3 phases) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at resistive load (2 poles per 3 pha | during storage | -30 +65 °C |
| Contactor 30 Amp number of NO contacts for main contacts 8 number of NC contacts for main contacts 4 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 600 V Type of main contacts 5ilver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 typical 100000 contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) e at tungsten (1 pole per 1 phase) rated value 20A @277V 1p 1ph e at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph e at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph e at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph e at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph e at ballast (3 poles per 3 phases) rated value 30A @600V 2p 1ph e at ballast (3 poles per 3 phases) rated value 30A @600V 2p 1ph e at resistive load (1 pole per 1 phase) rated value 30A @600V 3p 3ph e at resistive load (2 poles per 3 phases) rated value 30A @600V 3p 3ph e at resistive load (2 poles per 3 phases) rated value 30A @600V 3p 3ph <tr< td=""><td> during operation </td><td>-25 +40 °C</td></tr<> | during operation | -25 +40 °C |
| size of contactor 30 Amp number of NO contacts for main contacts 8 number of NC contacts for main current circuit at AC at 60 Hz 600 V maximum 7 Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 typical 100000 contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @2480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 3p 3ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph < | country of origin | USA |
| number of NO contacts for main contacts8number of NC contacts for main current circuit at AC at 60 Hz600 Vmaximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts100000typicalcontact rating of the main contacts of lighting contactor10A @120V / 3A @277V 1p 1phe at tungsten (1 pole per 1 phase) rated value20A @247V 1p 1phe at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1phe at ballast (1 pole per 1 phase) rated value20A @480V 2p 1phe at ballast (2 poles per 3 phases) rated value30A @600V 2p 1phe at ballast (2 poles per 1 phase) rated value30A @600V 2p 1phe at ballast (2 poles per 1 phase) rated value30A @600V 2p 1phe at ballast (2 poles per 1 phase) rated value30A @600V 2p 1phe at ballast (2 poles per 1 phase) rated value30A @600V 3p 3phe at resistive load (1 pole per 1 phase) rated value30A @600V 3p 3phe at resistive load (2 poles per 3 phases) rated value30A @600V 3p 3phe at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3phe at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3phe at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3phe at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3phmumber of NC contacts for auxiliary contacts0number of NC contacts for auxiliary contacts0 | Contactor | |
| number of NC contacts for main contacts 4 operating voltage for main current circuit at AC at 60 Hz 600 V Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts typical 100000 contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) • at tungsten (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (3 poles per 3 phases) rated value 30A @600V 2p 1ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 3 phases) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (3 poles | size of contactor | 30 Amp |
| operating voltage for main current circuit at AC at 60 Hz600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor100 @ 120V / 3A @ 277V 1p 1phe at tungsten (1 pole per 1 phase) rated value20A @ 277V 1p 1phe at tungsten (2 poles per 1 phase) rated value20A @ 480V 2p 1phe at tungsten (3 poles per 3 phases) rated value20A @ 480V 3p 3phe at ballast (1 pole per 1 phase) rated value30A @ 600V 2p 1phe at ballast (2 poles per 3 phases) rated value30A @ 600V 2p 1phe at ballast (2 poles per 1 phase) rated value30A @ 600V 2p 1phe at ballast (2 poles per 1 phase) rated value30A @ 600V 2p 1phe at ballast (2 poles per 1 phase) rated value30A @ 600V 2p 1phe at resistive load (1 pole per 1 phase) rated value30A @ 600V 3p 3phe at resistive load (2 poles per 1 phase) rated value30A @ 600V 3p 3phe at resistive load (2 poles per 1 phase) rated value30A @ 600V 3p 3phe at resistive load (3 poles per 3 phases) rated value30A @ 600V 3p 3phAuxiliary contact30A @ 600V 3p 3phAuxiliary contact0number of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0 | number of NO contacts for main contacts | 8 |
| maximumSilver alloy, double breakType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor0000• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at tersistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value< | number of NC contacts for main contacts | 4 |
| mechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (2 poles per 3 phases) rated value30A @600V 3p 3ph <tr <td=""><tr <tr="">• at resistive l</tr></tr> | | 600 V |
| | | |
| | | |
| typicaltypicalcontact rating of the main contacts of lighting contactor• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at ballast (3 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at re | Type of main contacts | Silver alloy, double break |
| • with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at mumber of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0 | | 100000 |
| rated value20A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @480V 2p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 3p 3ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• number of NC contacts for auxiliary contacts0• number of NO contacts for auxiliary contacts0 | contact rating of the main contacts of lighting contactor | |
| • at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3phAuxiliary contact30A @600V 3p 3phnumber of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0 | | 10A @120V / 3A @277V 1p 1ph |
| • at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3phAuxiliary contact30A @600V 3p 3phnumber of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0 | at tungsten (1 pole per 1 phase) rated value | 20A @277V 1p 1ph |
| • at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5p auxiliary contacts0number of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0 | at tungsten (2 poles per 1 phase) rated value | 20A @480V 2p 1ph |
| at ballast (2 poles per 1 phase) rated value at ballast (3 poles per 3 phases) rated value at resistive load (1 pole per 1 phase) rated value at resistive load (2 poles per 1 phase) rated value at resistive load (2 poles per 1 phase) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive rate value at rate value | at tungsten (3 poles per 3 phases) rated value | 20A @480V 3p 3ph |
| • at ballast (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact 30A @600V 3p 3ph number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0 | at ballast (1 pole per 1 phase) rated value | 30A @347V 1p 1ph |
| • at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact 30A @600V 3p 3ph number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0 | at ballast (2 poles per 1 phase) rated value | 30A @600V 2p 1ph |
| • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact 30A @600V 3p 3ph number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0 | at ballast (3 poles per 3 phases) rated value | 30A @600V 3p 3ph |
| • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact | • at resistive load (1 pole per 1 phase) rated value | 30A @600V 1p 1ph |
| Auxiliary contact number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0 | • at resistive load (2 poles per 1 phase) rated value | 30A @600V 2p 1ph |
| number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0 | • at resistive load (3 poles per 3 phases) rated value | 30A @600V 3p 3ph |
| number of NO contacts for auxiliary contacts 0 | Auxiliary contact | |
| | number of NC contacts for auxiliary contacts | 0 |
| number of total auxiliary contacts maximum 4 | number of NO contacts for auxiliary contacts | 0 |
| | number of total auxiliary contacts maximum | 4 |

| contact rating of auxiliary contacts of contactor according to UL | NA |
|---|------------------------------------|
| Coil | |
| type of voltage of the control supply voltage | AC |
| control supply voltage | |
| at AC at 50 Hz rated value | 220 V |
| at AC at 60 Hz rated value | 230 240 V |
| apparent pick-up power of magnet coil at AC | 248 VA |
| apparent holding power of magnet coil at AC | 28 VA |
| operating range factor control supply voltage rated value of magnet coil | 0.85 1.1 |
| Enclosure | |
| degree of protection NEMA rating of the enclosure | NEMA Туре 1 |
| design of the housing | indoors, usable on a general basis |
| Mounting/wiring | |
| mounting position | Vertical |
| fastening method | Surface mounting and installation |
| type of electrical connection for supply voltage line-side | Screw-type terminals |
| tightening torque [lbf·in] for supply | 35 35 lbf·in |
| type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded | 2x (14 8 AWG) |
| temperature of the conductor for supply maximum permissible | 75 °C |
| material of the conductor for supply | CU |
| type of electrical connection for load-side outgoing feeder | Screw-type terminals |
| tightening torque [lbf-in] for load-side outgoing feeder | 35 35 lbf·in |
| type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded | 2x (14 8 AWG) |
| temperature of the conductor for load-side outgoing feeder maximum permissible | 75 °C |
| material of the conductor for load-side outgoing feeder | CU |
| type of electrical connection of magnet coil | Screw-type terminals |
| tightening torque [lbf·in] at magnet coil | 15 15 lbf·in |
| type of connectable conductor cross-sections of magnet coil for AWG cables single or multi-stranded | 2x (18 14 AWG) |
| temperature of the conductor at magnet coil maximum permissible | 75 °C |
| material of the conductor at magnet coil | CU |
| Short-circuit current rating | |
| design of the fuse link for short-circuit protection of the main circuit required | 100kA@600V (Class R or J 40A max) |
| design of the short-circuit trip | Thermal magnetic circuit breaker |
| maximum short-circuit current breaking capacity (Icu) | |
| • at 240 V | 24 kA |
| • at 480 V | 65 kA |
| • at 600 V | 25 kA |
| certificate of suitability | NEMA ICS 2; UL 508 |
| Further information | |

Industrial Controls - Product Overview (Catalogs, Brochures,...)

www.usa.siemens.com/iccatalog

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:LCE01C408240A


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/US/en/ps/US2:LCE01C408240A

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:LCE01C408240A&lang=en

Certificates/approvals

https://support.industry.siemens.com/cs/US/en/ps/US2:LCE01C408240A/certificate



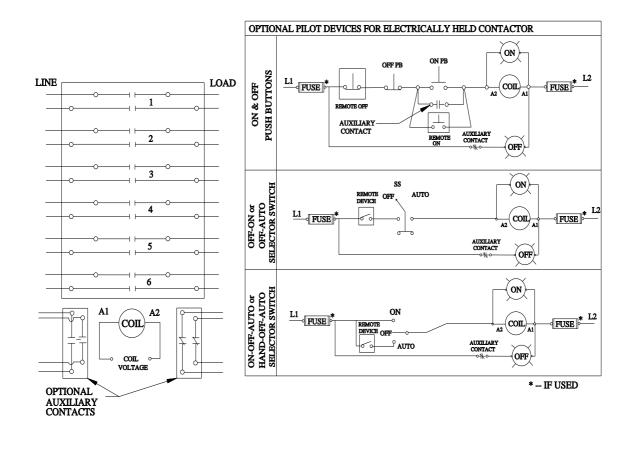

D38297001

last modified:

4/5/2023 🖸

7/10/2023