SIEMENS

Data sheet US2:LCE02C006208A



Electrically held lighting contactor, (convertible to mech. held), Amp rating 30A (tungsten 20A), 0 N.C. / 6 N.O. poles, 200-208V 60Hz coil, Non-combination type, Enclosure NEMA type 12, Dust/drip proof for indoors

design of the product special product feature Electrically held convertible to mechanically held) Electrically held convertible to mechanically held) Electrically held convertible to mechanically held; Power poles convertible between NO and NC General technical data weight [lb]	product brand name	Class LC
Electrically held convertible to mechanically held; Power poles convertible between NO and NC Ceneral technical data weight [ib] 19 ib Height x Width x Depth [in] 16 x 13 x 6 in NA for enclosed products installation altitude [ft] at height above sea level maximum 6560 ft ambient temperature ["F] • during storage -22 +149 "F • during storage -22 +149 "F • during storage -30 +65 "C • during operation -25 +40 "C country of origin USA Contactor size of contactor 30 Amp number of NO contacts for main contacts 6 anumber of NO contacts for main contacts 90 operating voltage for main current circuit at AC at 60 Hz maximum Type of main contacts silver alloy, double break Type of main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phases) rated value • at ballast (3 poles per 3 phases) rated value • at tallalast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at tallalast (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (4 pole per 1 phase) rated value • at ballast (5 poles per 3 phases) rated value • at ballast (6 poles per 3 phases) rated value • at tall sallast (7 pole per 1 phase) rated value • at ballast (7 pole per 1 phase) rated value • at ballast (7 poles per 3 phases) rated value • at ballast (7 poles per 3 phases) rated value • at resistive load (1 pole per 1 phase) rated value • at resistive load (1 pole per 1 phase) rated value	design of the product	Electrically held lighting contactor (convertible to mechanically held)
weight [ib]	<u> </u>	Electrically held convertible to mechanically held; Power poles convertible
Height x Width x Depth [in] touch protection against electrical shock installation altitude [ft] at height above sea level maximum ambient temperature [°F] • during storage • during operation ambient temperature • during storage • during operation -30 +65 °C -25 +40 °C country of origin USA Contactor size of contactor number of NC contacts for main contacts number of NC contacts for main current circuit at AC at 60 Hz maximum Type of main contacts mechanical service life (operating cycles) of the main contacts vipical contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value • at tungsten (1 pole per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 1 phase) rated value • at ballast (3 poles per 1 phase) rated value • at ballast (3 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (4 pole per 1 phase) rated value • at ballast (5 poles per 1 phase) rated value • at ballast (6 poles per 1 phase) rated value • at ballast (7 pole per 1 phase) rated value • at ballast (7 pole per 1 phase) rated value • at ballast (7 poles per 3 phases) rated value • at ballast (7 poles per 1 phase) rated value • at ballast (7 poles per 1 phase) rated value • at ballast (7 poles per 1 phase) rated value • at ballast (7 poles per 1 phase) rated value • at ballast (7 poles per 1 phase) rated value • at ballast (7 poles per 1 phase) rated value • at ballast (7 poles per 1 phase) rated value • at ballast (7 poles per 1 phase) rated value • at ballast (7 poles per 1 phase) rated value • at ballast (7 poles per 1 phase) rated value • at ballast (7 pole per 1 phase) rated value	General technical data	
touch protection against electrical shock installation altitude [ft] at height above sea level maximum ambient temperature ["F] • during storage • during operation ambient temperature • during storage • during storage • during operation -30 +65 °C • during operation -25 +40 °C country of origin Contactor size of contactor number of NC contacts for main contacts number of NC contacts for main contacts operating voltage for main current circuit at AC at 60 Hz maximum Type of main contacts smechanical service life (operating cycles) of the main contacts typical contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (2 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (4 pole per 1 phase) rated value • at ballast (5 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (4 pole per 1 phase) rated value • at ballast (5 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (1 pole per 1 phase) rated value	weight [lb]	19 lb
installation altitude [ft] at height above sea level maximum ambient temperature [°F] • during storage • during operation ambient temperature • during storage • during storage • during operation -13 +104 °F ambient temperature • during operation -25 +40 °C country of origin USA Contactor size of contacts for main contacts size of contacts for main contacts 0 operating voltage for main current circuit at AC at 60 Hz maximum Type of main contacts specifical service life (operating cycles) of the main contacts typical contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (3 poles per 3 phases) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at resistive load (1 pole per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at resistive load (1 pole per 1 phase) rated value • at resistive load (1 pole per 1 phase) rated value	Height x Width x Depth [in]	16 × 13 × 6 in
ambient temperature [°F] • during storage • during operation -13 +104 °F ambient temperature • during storage • during operation -25 +40 °C country of origin USA Contactor size of contactor number of NC contacts for main contacts 0 operating voltage for main current circuit at AC at 60 Hz maximum Type of main contacts silver alloy, double break mechanical service life (operating cycles) of the main contacts typical contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value • at tungsten (1 pole per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (4 pole per 1 phase) rated value • at ballast (5 poles per 1 phase) rated value • at ballast (6 pole per 1 phase) rated value • at ballast (7 pole per 1 phase) rated value • at ballast (9 pole per 1 phase) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (1 pole per 1 phase) rated value	touch protection against electrical shock	NA for enclosed products
 during storage during operation ambient temperature during storage during storage during operation 25 +40 °C country of origin USA Contactor size of contactor main contacts number of NO contacts for main contacts number of NC contacts for main contacts operating voltage for main current circuit at AC at 60 Hz maximum Type of main contacts silver alloy, double break Type of main contacts silver alloy, double break Tonunct rating of the main contacts of lighting contactor with electronic ballast [LED driver] (1 pole per 1 phase) rated value at tungsten (1 pole per 1 phase) rated value at tungsten (2 poles per 1 phase) rated value at tungsten (2 poles per 3 phases) rated value at ballast (1 pole per 1 phase) rated value at ballast (2 poles per 1 phase) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 1 phase) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at resistive load (1 pole per 1 phase) rated value 30A @600V 2p 1ph at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph 	installation altitude [ft] at height above sea level maximum	6560 ft
 during operation -13 +104 °F ambient temperature during storage -30 +65 °C during operation 25 +40 °C country of origin USA Contactor size of contacts for main contacts number of NO contacts for main contacts operating voltage for main current circuit at AC at 60 Hz maximum Type of main contacts Silver alloy, double break 100000 typical contact rating of the main contacts of lighting contactor with electronic ballast [LED driver] (1 pole per 1 phase) rated value at tungsten (2 poles per 1 phase) rated value at tungsten (3 poles per 3 phases) rated value at ballast (1 pole per 1 phase) rated value at ballast (3 poles per 1 phase) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 1 phase) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at contact rating of the main contacts of value at ballast (3 poles per 3 phases) rated value at contact rating of the main contacts of value at contact rating of the main contacts of value at ballast (3 poles per 3 phases) rated value at contact rating of the main contacts of value at contact rating of the main contacts of value at contact rating of the main contacts of value at contact rating of the main contacts of value at contact rating of the main contacts of value at contact rating of the main contacts of value at contact rating of the main contacts of v	ambient temperature [°F]	
ambient temperature • during storage • during operation country of origin USA Contactor size of contactor number of NO contacts for main contacts operating voltage for main current circuit at AC at 60 Hz maximum Type of main contacts mechanical service life (operating cycles) of the main contacts typical contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at cesistive load (1 pole per 1 phase) rated value • at resistive load (1 pole per 1 phase) rated value • at resistive load (1 pole per 1 phase) rated value	during storage	-22 +149 °F
 during storage during operation -25 +40 °C country of origin USA Contactor size of contactor number of NO contacts for main contacts number of NC contacts for main contacts operating voltage for main current circuit at AC at 60 Hz maximum Type of main contacts mechanical service life (operating cycles) of the main contacts typical contact rating of the main contacts of lighting contactor with electronic ballast [LED driver] (1 pole per 1 phase) rated value at tungsten (2 poles per 1 phase) rated value at tungsten (3 poles per 3 phases) rated value at ballast (1 pole per 1 phase) rated value at ballast (2 poles per 1 phase) rated value at ballast (2 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at contact rating of the main contacts 30A @600V 2p 1ph at ballast (3 poles per 3 phases) rated value at resistive load (1 pole per 1 phase) rated value at resistive load (1 pole per 1 phase) rated value at resistive load (1 pole per 1 phase) rated value at Pole Per 1 phase at resistive load (1 pole per 1 phase) rated value at resistive load (1 pole per 1 phase) rated value at resistive load (1 pole per 1 phase) rated value 	during operation	-13 +104 °F
• during operation country of origin USA Contactor size of contactor size of contacts for main contacts number of NO contacts for main contacts operating voltage for main current circuit at AC at 60 Hz maximum Type of main contacts mechanical service life (operating cycles) of the main contacts typical contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value • at tungsten (1 pole per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at cesistive load (1 pole per 1 phase) rated value • at resistive load (1 pole per 1 phase) rated value • at resistive load (1 pole per 1 phase) rated value • at resistive load (1 pole per 1 phase) rated value • at resistive load (1 pole per 1 phase) rated value	ambient temperature	
country of origin Size of contactor size of contactor number of NO contacts for main contacts number of NC contacts for main current circuit at AC at 60 Hz maximum Type of main contacts mechanical service life (operating cycles) of the main contacts typical contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value • at tungsten (1 pole per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (1 pole per 1 phase) rated value • at cesistive load (1 pole per 1 phase) rated value • at resistive load (1 pole per 1 phase) rated value • at resistive load (1 pole per 1 phase) rated value • at resistive load (1 pole per 1 phase) rated value	during storage	-30 +65 °C
size of contactor number of NO contacts for main contacts number of NC contacts for main contacts operating voltage for main current circuit at AC at 60 Hz maximum Type of main contacts mechanical service life (operating cycles) of the main contacts typical contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value • at tungsten (1 pole per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at resistive load (1 pole per 1 phase) rated value • at resistive load (1 pole per 1 phase) rated value	during operation	-25 +40 °C
size of contactor number of NO contacts for main contacts number of NC contacts for main contacts operating voltage for main current circuit at AC at 60 Hz maximum Type of main contacts mechanical service life (operating cycles) of the main contacts typical contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value • at tungsten (1 pole per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (4 pole per 1 phase) rated value • at ballast (5 poles per 1 phase) rated value • at resistive load (1 pole per 1 phase) rated value • at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph	country of origin	USA
number of NO contacts for main contacts number of NC contacts for main contacts operating voltage for main current circuit at AC at 60 Hz maximum Type of main contacts mechanical service life (operating cycles) of the main contacts typical contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value • at tungsten (1 pole per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 1 phase) rated value • at ballast (3 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (4 pole per 1 phase) rated value • at contact rating of the main contacts 100000 10A @120V / 3A @277V 1p 1ph 20A @277V 1p 1ph 20A @480V 2p 1ph 30A @347V 1p 1ph • at ballast (3 poles per 3 phases) rated value 30A @600V 2p 1ph • at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph	Contactor	
number of NC contacts for main contacts operating voltage for main current circuit at AC at 60 Hz maximum Type of main contacts mechanical service life (operating cycles) of the main contacts typical contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value • at tungsten (1 pole per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at resistive load (1 pole per 1 phase) rated value • at resistive load (1 pole per 1 phase) rated value • at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph	size of contactor	30 Amp
operating voltage for main current circuit at AC at 60 Hz maximum Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts typical contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value • at tungsten (1 pole per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at resistive load (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ode 600V 3p 3ph • at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph	number of NO contacts for main contacts	6
Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts typical contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value • at tungsten (1 pole per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 1 phase) rated value • at resistive load (1 pole per 1 phase) rated value 30A @600V 3p 3ph • at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph	number of NC contacts for main contacts	0
mechanical service life (operating cycles) of the main contacts typical contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value • at tungsten (1 pole per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph		600 V
typical contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value • at tungsten (1 pole per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (2 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 3 phases) rated value • at ballast (3 poles per 1 phase) rated value • at resistive load (1 pole per 1 phase) rated value 30A @600V 3p 3ph • at resistive load (1 pole per 1 phase) rated value	Type of main contacts	Silver alloy, double break
 with electronic ballast [LED driver] (1 pole per 1 phase) rated value at tungsten (1 pole per 1 phase) rated value at tungsten (2 poles per 1 phase) rated value at tungsten (3 poles per 3 phases) rated value at ballast (1 pole per 1 phase) rated value at ballast (2 poles per 1 phase) rated value at ballast (2 poles per 1 phase) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph 30A @600V 1p 1ph 		100000
rated value • at tungsten (1 pole per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (3 poles per 3 phases) rated value • at ballast (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (3 poles per 1 phase) rated value • at ballast (3 poles per 3 phases) rated value • at resistive load (1 pole per 1 phase) rated value 30A @600V 3p 3ph • at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph	contact rating of the main contacts of lighting contactor	
 at tungsten (2 poles per 1 phase) rated value at tungsten (3 poles per 3 phases) rated value at ballast (1 pole per 1 phase) rated value at ballast (2 poles per 1 phase) rated value at ballast (3 poles per 1 phase) rated value at ballast (3 poles per 3 phases) rated value at resistive load (1 pole per 1 phase) rated value 30A @600V 3p 3ph at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph 		10A @120V / 3A @277V 1p 1ph
 at tungsten (3 poles per 3 phases) rated value at ballast (1 pole per 1 phase) rated value at ballast (2 poles per 1 phase) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at resistive load (1 pole per 1 phase) rated value 30A @600V 3p 3ph at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph 	• at tungsten (1 pole per 1 phase) rated value	20A @277V 1p 1ph
 at ballast (1 pole per 1 phase) rated value at ballast (2 poles per 1 phase) rated value at ballast (3 poles per 3 phases) rated value at resistive load (1 pole per 1 phase) rated value 30A @600V 2p 1ph 30A @600V 3p 3ph 30A @600V 1p 1ph 	• at tungsten (2 poles per 1 phase) rated value	20A @480V 2p 1ph
 at ballast (2 poles per 1 phase) rated value at ballast (3 poles per 3 phases) rated value at resistive load (1 pole per 1 phase) rated value 30A @600V 2p 1ph 30A @600V 3p 3ph 30A @600V 1p 1ph 	• at tungsten (3 poles per 3 phases) rated value	20A @480V 3p 3ph
 at ballast (3 poles per 3 phases) rated value at resistive load (1 pole per 1 phase) rated value 30A @600V 3p 3ph 30A @600V 1p 1ph 	at ballast (1 pole per 1 phase) rated value	30A @347V 1p 1ph
• at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph	 at ballast (2 poles per 1 phase) rated value 	30A @600V 2p 1ph
	• at ballast (3 poles per 3 phases) rated value	30A @600V 3p 3ph
	• at resistive load (1 pole per 1 phase) rated value	30A @600V 1p 1ph
• at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph	• at resistive load (2 poles per 1 phase) rated value	30A @600V 2p 1ph
• at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph	• at resistive load (3 poles per 3 phases) rated value	30A @600V 3p 3ph
Auxiliary contact	Auxiliary contact	
number of NC contacts for auxiliary contacts 0	number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts 0	number of NO contacts for auxiliary contacts	0
number of total auxiliary contacts maximum 4	number of total auxiliary contacts maximum	4

contact rating of auxiliary contacts of contactor according to UL	NA NA	
Coil		
type of voltage of the control supply voltage	AC	
control supply voltage		
at AC at 60 Hz rated value	200 208 V	
apparent pick-up power of magnet coil at AC	248 VA	
apparent holding power of magnet coil at AC	28 VA	
operating range factor control supply voltage rated value of magnet coil	0.85 1.1	
Enclosure		
degree of protection NEMA rating of the enclosure	NEMA Type 12	
design of the housing	dustproof and drip-proof for indoor use	
Mounting/wiring		
mounting position	Vertical	
fastening method	Surface mounting and installation	
type of electrical connection for supply voltage line-side	Screw-type terminals	
tightening torque [lbf·in] for supply	35 35 lbf·in	
type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded	2x (14 8 AWG)	
temperature of the conductor for supply maximum permissible	75 °C	
material of the conductor for supply	CU	
type of electrical connection for load-side outgoing feeder	Screw-type terminals	
tightening torque [lbf-in] for load-side outgoing feeder	35 35 lbf-in	
type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded	2x (14 8 AWG)	
temperature of the conductor for load-side outgoing feeder maximum permissible	75 °C	
material of the conductor for load-side outgoing feeder	CU	
type of electrical connection of magnet coil	Screw-type terminals	
tightening torque [lbf·in] at magnet coil	15 15 lbf·in	
type of connectable conductor cross-sections of magnet coil for AWG cables single or multi-stranded	2x (18 14 AWG)	
temperature of the conductor at magnet coil maximum permissible	75 °C	
material of the conductor at magnet coil	CU	
Short-circuit current rating		
design of the fuse link for short-circuit protection of the main circuit required	100kA@600V (Class R or J 40A max)	
design of the short-circuit trip	Thermal magnetic circuit breaker	
maximum short-circuit current breaking capacity (lcu)		
• at 240 V	24 kA	
● at 480 V	65 kA	
● at 600 V	25 kA	
certificate of suitability	NEMA ICS 2; UL 508	
Further information		

Industrial Controls - Product Overview (Catalogs, Brochures,...)

www.usa.siemens.com/iccatalog

Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:LCE02C006208A


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/US/en/ps/US2:LCE02C006208A

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

Certificates/approvals

https://support.industry.siemens.com/cs/US/en/ps/US2:LCE02C006208A/certificate

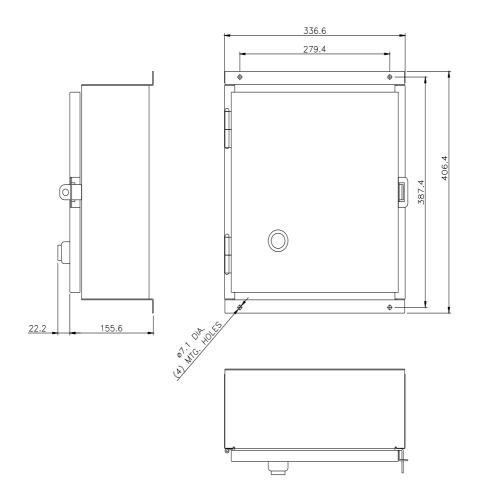

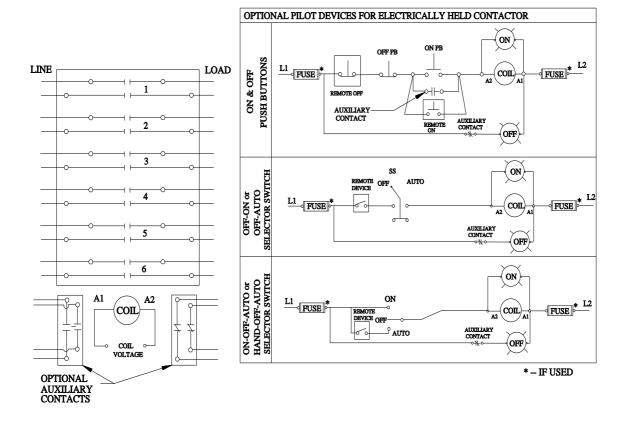

D38297001

last modified: 4/5/2023 🖸

