SIEMENS

Data sheet

US2:LCE02C600120A



Electrically held lighting contactor, (convertible to mech. held), Amp rating 30A (tungsten 20A), 6 N.C. / 0 N.O. poles, 115-120V 60Hz/110V 50Hz coil, Non-combination type, Enclosure NEMA type 12, Dust/drip proof for indoors

design of the product Electrically held lighting contactor (convertible to mechanically held) special product feature Electrically held in the disconvertible to mechanically held, Power poles convertible between No and NC General tochnical data 19 lb Height X Widh x Deph [in] 19 k 13 x 6 in touch protection against electrical shock NA for enclosed products installation althude [ft] at height above sea level maximum 6660 ft ambient temperature [FF] - • during storage -22 +149 "F • during storage -30 + 56 "C • during storage -30 + 65 "C	product brand name	Class LC
Detween NO and NC Ceneral technical data weight [Ib] 19 lb Height x Widh x Deph [in] 16 x 13 x 6 in touch protection against electrical shock NA for enclosed products installation atlifued [If at height above sea level maximum 6660 ft ambient temperature ['F]	design of the product	Electrically held lighting contactor (convertible to mechanically held)
weight [b] 19 lb Height x Widh x Depth [in] 16 × 13 × 6 in touch protection against electrical shock NA for enclosed products installation altitude [it] at height above sea level maximum 6660 ft ambient temperature ['F] - • during storage 22 +149 "F • during operation -13 +104 "F ambient temperature 30 +65 °C • during operation -25 +40 °C country of origin USA Contactor 30 Amp number of NC contacts for main contacts 0 number of NC contacts for main contacts 6 operating voltage for main current circuit at AC at 60 Hz 100000 maximum 100000 vitte allow (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at lungsten (1 pole per 1 phase) rated value 20A @480V 3p 3ph • at ballast (2 poles per 1 phase) rated value 20A @480V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated	special product feature	
LinkIdex 13 × 6 intouch protection against electrical shockNA for enclosed productsinstallation altitude [ft] at height above sea level maximum6560 ftambient temperature [F]-• during storage-22 +149 "F• during operation-13 +104 "Fambient temperature-• during operation-25 +40 °C• during operation-26 +40 °C <td>General technical data</td> <td></td>	General technical data	
touch protection against electrical shock NA for enclosed products installation affitude [II] at height above sea level maximum 6560 ft ambient temperature [Y] -22 +149 "F • during storage -22 +149 "F • during operation -13 +104 "F ambient temperature -00 +65 °C • during operation -25 +40 °C country of origin USA Contactor 30 Amp number of NC contacts for main contacts 0 number of NC contacts for main contacts 0 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 5liver alloy, double break reacting of the main contacts 100000 vitte alloy due 20A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 3 phases) rated value 20A @480V 2p 1ph • at ballast (1 pole per 1 phase) rated value 20A @480V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @000V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @000V 2p 1ph • at ballast (2 poles per 1 phase) ra	weight [lb]	19 lb
Installation altitude [ft] at height above sea level maximum 6560 ft ambient temperature ["F] -22 +149 "F • during storage -22 +149 "F ambient temperature -13 +104 "F ambient temperature -30 +65 "C • during operation -25 +40 "C country of origin USA Contactor 30 Amp number of NC contacts for main contacts 0 number of NC contacts for main contacts 6 operating voltage for main current circuit at AC at 60 Hz 600 V maximum Silver alloy, double break Type of main contacts 100000 rechanical service life (operating cycles) of the main contacts 100000 outlet electronic ballast [LED driver] (1 pole per 1 phase) 10A @120V / 3A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 3 phases) rated value	Height x Width x Depth [in]	16 × 13 × 6 in
ambient temperature [*F] -22 +149 *F • during storage -22 +149 *F • during operation -13 +104 *F ambient temperature -13 +104 *F • during operation -25 +40 *C • during operation -25 +40 *C • during operation -25 +40 *C country of origin USA Contactor 30 Amp number of NC contacts for main contacts 0 number of NC contacts for main contacts 6 operating voltage for main current circuit at AC at 60 Hz 600 V maximum File Type of main contacts 6 operating voltage for main contacts 100000 visite leatorin ballast [LED driver] (1 pole per 1 phase) 10A @120V / 3A @277V 1p ph • att ungsten (2 poles per 1 phase) rated value 20A @4277V 1p ph • att ungsten (2 poles per 1 phase) rated value 20A @480V 3p 3ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 3p 3ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A	touch protection against electrical shock	NA for enclosed products
• during storage -22 +149 °F • during operation -13 +104 °F ambient temperature -30 +65 °C • during operation -25 +40 °C country of origin USA Contactor 30 Amp number of NO contacts for main contacts 0 number of NC contacts for main contacts 6 operating voltage for main current circuit at AC at 60 Hz 600 V Type of main contacts 5ilver alloy, double break Type of main contacts of lighting contactor 100000 • with electronic ballast [LED driver] (1 pole per 1 phase) 10A @120V / 3A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (3 poles per 3 phases) rated value 20A @480V 3p 3ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 3 phases) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ball	installation altitude [ft] at height above sea level maximum	6560 ft
e during operation-13 +104 °Fambient temperature-30 +65 °C• during operation-25 +40 °Ccountry of originUSAContactorSize of contactor30 Ampnumber of NO contacts for main contacts00number of NC contacts for main contacts0000 Vmaximum600 VType of main contacts5liver alloy, double breakmechanical service life (operating cycles) of the main contacts100000contact rating of the main contacts of lighting contactor10A @120V / 3A @277V 1p 1ph• with electronic ballast [LED driver] (1 pole per 1 phase) rated value20A @480V 2p 1ph• at tungsten (1 pole per 1 phase) rated value20A @480V 2p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at tersistive load (1 pole per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phas	ambient temperature [°F]	
ambient temperature• during storage-30 +65 °C• during operation-25 +40 °Ccountry of originUSAContactor30 Ampnumber of NO contacts for main contacts0number of NC contacts for main contacts6operating voltage for main current circuit at AC at 60 Hz600 Vmaximum5liver alloy, double breakType of main contactsSilver alloy, double breaktoperating voltage for main contacts100000Type of main contactsSilver alloy, double breakmaximum100000toperating of the main contacts of lighting contactor10A @120V / 3A @277V 1p 1phcontact rating of the main contacts of lighting contactor10A @120V / 3A @277V 1p 1phe at tungsten (1 pole per 1 phase) rated value20A @480V 3p 3phe at tungsten (2 poles per 1 phase) rated value20A @480V 3p 3phe at ballast (2 poles per 1 phase) rated value30A @600V 3p 1phe at ballast (2 poles per 1 phase) rated value30A @600V 3p 3phe at ballast (2 poles per 1 phase) rated value30A @600V 3p 1phe at ballast (2 poles per 1 phase) rated value30A @600V 3p 3phe at resistive load (1 pole per 1 phase) rated value30A @600V 3p 3phe at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3phe at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3phe at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3phe at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3phe at resistive	during storage	-22 +149 °F
• during storage-30 +65 °C• during operation-25 +40 °Ccountry of originUSAContactor	during operation	-13 +104 °F
• during operation-25 +40 °Ccountry of originUSAContactor30 Ampnumber of NC contacts for main contacts0number of NC contacts for main contacts6operating voltage for main current circuit at AC at 60 Hz maximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts100000• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @480V 2p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30	ambient temperature	
country of originUSAContactor30 Ampnumber of NO contacts for main contacts0number of NC contacts for main contacts6operating voltage for main current circuit at AC at 60 Hz600 Vmaximum5ilver alloy, double breakType of main contactsSilver alloy, double breakType of main contacts100000contact rating of the main contacts of lighting contactor10A @120V / 3A @277V 1p 1phe at tungsten (1 pole per 1 phase) rated value20A @480V 2p 1phe at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1phe at ballast (1 pole per 1 phase) rated value30A @600V 2p 1phe at ballast (2 poles per 1 phase) rated value30A @600V 2p 1phe at ballast (2 poles per 1 phase) rated value30A @600V 2p 1phe at ballast (2 poles per 1 phase) rated value30A @600V 2p 1phe at ballast (2 poles per 1 phase) rated value30A @600V 2p 1phe at ballast (2 poles per 1 phase) rated value30A @600V 2p 1phe at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1phe at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1phe at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3phAuxiliary contact10A @120V 3p 3phnumber of NC contacts for auxiliary contacts0number of NC contacts for auxiliary contacts0	 during storage 	-30 +65 °C
Size of contactor 30 Amp number of NO contacts for main contacts 0 number of NC contacts for main contacts 6 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 7ype of main contacts 9 Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 vith electronic ballast [LED driver] (1 pole per 1 phase) rated value 10A @120V / 3A @277V 1p 1ph e at tungsten (1 pole per 1 phase) rated value 20A @480V 2p 1ph e at tungsten (2 poles per 1 phase) rated value 20A @480V 3p 3ph e at ballast (2 poles per 3 phases) rated value 30A @600V 2p 1ph e at ballast (3 poles per 3 phases) rated value 30A @600V 3p 3ph e at ballast (3 poles per 3 phases) rated value 30A @600V 3p 3ph e at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph e at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph e at resistive load (3 poles per 3 phases) rated value 30A @600V 2p 1ph e at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph e at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxillary con	during operation	-25 +40 °C
size of contacts 30 Amp number of NO contacts for main contacts 0 number of NC contacts for main contacts 6 operating voltage for main current circuit at AC at 60 Hz maximum 600 V Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts typical 100000 contact rating of the main contacts of lighting contactor 10A @120V / 3A @277V 1p 1ph • with electronic ballast [LED driver] (1 pole per 1 phase) rated value 20A @2480V 2p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 3 phases) rated value 20A @480V 2p 1ph • at ballast (2 poles per 3 phases) rated value 30A @600V 2p 1ph • at ballast (3 poles per 3 phases) rated value 30A @600V 2p 1ph • at ballast (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 2p 1ph • at resist	country of origin	USA
number of NO contacts for main contacts0number of NC contacts for main contacts6operating voltage for main current circuit at AC at 60 Hz maximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value </td <td>Contactor</td> <td></td>	Contactor	
number of NC contacts for main contacts6operating voltage for main current circuit at AC at 60 Hz maximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value30A @600V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3phAuxiliary contact30A @600V 3p 3phAuxiliary contacts for auxiliary contacts0number of NC contacts for auxiliary contacts0	size of contactor	30 Amp
operating voltage for main current circuit at AC at 60 Hz maximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value30A @600V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @60	number of NO contacts for main contacts	0
maximumSilver alloy, double breakType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor10A @120V / 3A @277V 1p 1ph• with electronic ballast [LED driver] (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value<	number of NC contacts for main contacts	6
mechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 3 phases) rated value30A @600V 3p 3ph• at resistive load (2 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (2 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3		600 V
typicalcontact rating of the main contacts of lighting contactor• with electronic ballast [LED driver] (1 pole per 1 phase) rated value• at tungsten (1 pole per 1 phase) rated value• at tungsten (2 poles per 1 phase) rated value• at tungsten (3 poles per 3 phases) rated value• at ballast (1 pole per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (3 poles per 3 phases) rated value• at resistive load (1 pole per 1 phase) rated value• at resistive load (2 poles per 1 phase) rated value• at resistive load (2 poles per 1 phase) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (5 poles per 3 phases) rated value• at resistive load (6 poles per 3 phases) rated value• at resistive load (6 poles per 3 phases) rated value• at resistive load (7 poles per 3 phases) rated value• at resistive load (2 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value	Type of main contacts	Silver alloy, double break
• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph <tr <tr=""><tr <td="">• atr</tr></tr>		100000
rated value20A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (3 poles per 3 phases) rated value30A @600V 1p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• Auxiliary contact30A @600V 3p 3phnumber of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0	contact rating of the main contacts of lighting contactor	
• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• Auxiliary contact30A @600V 3p 3phnumber of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0		10A @120V / 3A @277V 1p 1ph
• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• Auxiliary contact30A @600V 3p 3phnumber of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0	 at tungsten (1 pole per 1 phase) rated value 	20A @277V 1p 1ph
• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• Auxiliary contact30A @600V 3p 3phnumber of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0	 at tungsten (2 poles per 1 phase) rated value 	20A @480V 2p 1ph
• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• Auxiliary contact30A @600V 3p 3ph• number of NC contacts for auxiliary contacts0• number of NO contacts for auxiliary contacts0	 at tungsten (3 poles per 3 phases) rated value 	20A @480V 3p 3ph
• at ballast (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact 30A @600V 3p 3ph number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at ballast (1 pole per 1 phase) rated value 	30A @347V 1p 1ph
• at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at ballast (2 poles per 1 phase) rated value 	30A @600V 2p 1ph
• at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact 30A @600V 3p 3ph number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at ballast (3 poles per 3 phases) rated value 	30A @600V 3p 3ph
	 at resistive load (1 pole per 1 phase) rated value 	30A @600V 1p 1ph
Auxiliary contact 0 number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at resistive load (2 poles per 1 phase) rated value 	30A @600V 2p 1ph
number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at resistive load (3 poles per 3 phases) rated value 	30A @600V 3p 3ph
number of NO contacts for auxiliary contacts 0	Auxiliary contact	
	number of NC contacts for auxiliary contacts	0
number of total auxiliary contacts maximum 4	number of NO contacts for auxiliary contacts	0
	number of total auxiliary contacts maximum	4

contact rating of auxiliary contacts of contactor according to UL	NA
Coil	NA
type of voltage of the control supply voltage	AC
	AC
control supply voltage	110.1/
at AC at 50 Hz rated value	110 V
at AC at 60 Hz rated value	115 120 V
apparent pick-up power of magnet coil at AC	248 VA
apparent holding power of magnet coil at AC	28 VA
operating range factor control supply voltage rated value of magnet coil	0.85 1.1
Enclosure	
degree of protection NEMA rating of the enclosure	NEMA Type 12
design of the housing	dustproof and drip-proof for indoor use
Mounting/wiring	
mounting position	Vertical
fastening method	Surface mounting and installation
type of electrical connection for supply voltage line-side	Screw-type terminals
tightening torque [lbf·in] for supply	35 35 lbf-in
type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded	2x (14 8 AWG)
temperature of the conductor for supply maximum permissible	75 °C
material of the conductor for supply	CU
type of electrical connection for load-side outgoing feeder	Screw-type terminals
tightening torque [lbf·in] for load-side outgoing feeder	35 35 lbf·in
type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded	2x (14 8 AWG)
temperature of the conductor for load-side outgoing feeder maximum permissible	75 °C
material of the conductor for load-side outgoing feeder	CU
type of electrical connection of magnet coil	Screw-type terminals
tightening torque [lbf·in] at magnet coil	15 15 lbf·in
type of connectable conductor cross-sections of magnet coil for AWG cables single or multi-stranded	2x (18 14 AWG)
temperature of the conductor at magnet coil maximum permissible	75 °C
material of the conductor at magnet coil	CU
Short-circuit current rating	
design of the fuse link for short-circuit protection of the main circuit required	100kA@600V (Class R or J 40A max)
design of the short-circuit trip	Thermal magnetic circuit breaker
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	24 kA
● at 480 V	65 kA
● at 600 V	25 kA
certificate of suitability	NEMA ICS 2; UL 508
Further information	

Industrial Controls - Product Overview (Catalogs, Brochures,...)

www.usa.siemens.com/iccatalog

Industry Mall (Online ordering system)


https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:LCE02C600120A Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/US/en/ps/US2:LCE02C600120A

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:LCE02C600120A&lang=en

Certificates/approvals

https://support.industry.siemens.com/cs/US/en/ps/US2:LCE02C600120A/certificate



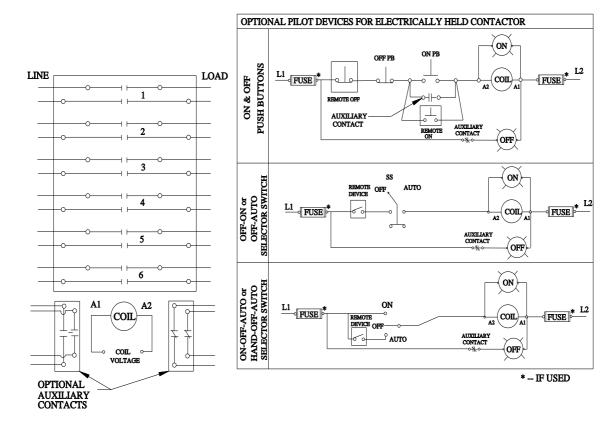

D38297001

last modified:

4/5/2023 🖸