SIEMENS

Data sheet

US2:LCE04C605347A



Electrically held lighting contactor, (convertible to mech. held), Amp rating 30A (tungsten 20A), 6 N.C. / 5 N.O. poles, 347V 60Hz coil, Non-combination type, Encl NEMA type 4X 304 S-Steel, Water/dust tight noncorrosive

design of the product Electrically held injuing contactor (convertible to mechanically held) special product feature Electrically held convertible to mechanically held; Power poles convertible between N0 and NC General tochnical data 21 b Height X Width x Depth [in] 16 × 13 × 6 in Hought Tipo Totection against electrical shock NA for enclosed products installation altitude [fit at height above sea level maximum 6560 ft ambient temperature ['F] -22 +149 'F • during operation -30 + 65 'C • during operation -30 + 65 'C • during operation USA Contactor -30 + 65 'C • during operation USA Contactor 0 Annp number of NC contacts for main contacts 6 operating vortage for main contacts 100000 Type of main contacts 100000 react value 20A (490 V ya Ag277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A (2977V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A (290 V / 3A (2977V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A (290 V / 3A (2977V 1p 1ph </th <th>product brand name</th> <th>Class LC</th>	product brand name	Class LC
Detween NO and NC Consort technical data weight [lb] 21 lb Height X Width x Depth [in] 16 x 13 x 6 in touch protection against electrical shock NA for enclosed products installation altitude [lt] at height above sea level maximum 6560 ft ambient temperature ['F] - • during storage -22 +149 "F • during operation -13 +104 "F ambient temperature - • during operation -25 +140 "C contactor -25 +00 "C country of origin USA Contactor -25 +00 "C size of contacts for main contacts 5 number of NC contacts for main contacts 6 operating voltage for main cont	design of the product	Electrically held lighting contactor (convertible to mechanically held)
weight [[b] 21 lb Height x Widh x Depth [in] 16 × 13 × 6 in touch protection against electrical shock NA for enclosed products installation altitude [ft] at height above sea level maximum 6560 ft ambient temperature ['F] - • during storage -22 +149 "F • during operation -13 +104 "F ambient temperature - • during operation -25 +40 "C • during operation -26 +40 "C • during of origin USA Contactor 30 Amp	special product feature	
Height x Widh x Depth [in]16 x 13 x 6 intouch protection against electrical shockNA for enclosed productsinstallation altitude [ft] at height above sea level maximum660 ftambient temperature [°F]-• during storage-22 + 149 °F• during operation-13 + 104 °Fambient temperature-• during operation-25 + 40 °C• during operation-26 + 40 °C• during of real contacts5• number of NC contacts for main contacts6• operating voltage for main current circuit at AC at 60 Hz600 Vmaximum-27 + 40 °C• type alian contacts100000• type alian contacts100000• type alian contacts100000• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per	General technical data	
Duck protection against electrical shock NA for enclosed products installation altitude [t] at height above sea level maximum 6560 ft amblent temperature [r] - • during operation -13 +104 "F amblent temperature - • during operation -30 +65 "C • during operation -25 +40 "C country of origin USA Contactor 30 Amp number of NC contacts for main contacts 5 number of NC contacts for main contacts 6 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 100000 Type of main contacts 5 resting of the main contacts 100000 vith electronic bailast [LED driver] (1 pole per 1 phase) 10000 • at tungsten (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at bailast (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at bailast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at bailast (2 poles per 1 phase) rated value 30A @600V 3p 3ph	weight [lb]	21 lb
Installation altitude [ft] at height above sea level maximum 6560 ft ambient temperature [°F] -22 +149 °F • during storage -23 +164 °F ambient temperature -30 +65 °C • during storage -30 +65 °C • during operation USA contry origin USA contry origin USA control origin 0 Amp number of NC contacts for main contacts 5 number of NC contacts for main contacts 6 operating voltage for main current circuit at AC at 60 Hz 600 V maximum ftiol (perating cycles) of the main contacts 100000 rype of main contacts Silver alloy, double break 100000 rype and in contacts of lighting contactor 10A @1207 / 3A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value	Height x Width x Depth [in]	16 × 13 × 6 in
ambient temperature [*F] • during storage • during operation ambient temperature • during operation • during of main contacts • for • during of main contacts • for • during of the main contacts • for • during of the main contacts of the main contacts • during of the main contacts of the main contacts • during of the main contacts of the main contacts • during of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) • at tungsten (1 pole per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (2 poles per 1 phase) rated value • at tungsten (1 pole per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at ballast (2 poles per 1 phase) rated value • at resistive load (2 poles per 1 phase) rated value • at resistive load (2 poles per 3 phases) rated value • at resistive load (2 poles per 3 phases) rated value • at resistive load (2 poles per 3 phases) rated value • at resistive load (2 poles per 3 phases) rated value • at resistive load (2 poles per 3 phases) rated value • at resistive load (2 poles per 3 phases) rated value • at resistive load (2 poles per 3 phases) rated value • at resistive load (2 poles per 3 phases) rated value • at resistive load (2 poles per 3 phases) rated value • at resisti	touch protection against electrical shock	NA for enclosed products
• during storage-22 +149 °F• during operation-13 +104 °Fambient temperature-30 +65 °C• during storage-30 +65 °C• during operation-25 +40 °Ccountry of originUSAContactorsize of contactornumber of NC contacts for main contacts5number of NC contacts for main contacts6operating voltage for main current circuit at AC at 60 Hz600 VmaximumSilver alloy, double breakType of main contactsSilver alloy, double breakmextension100000vitage in (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @277V 1p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 3ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load	installation altitude [ft] at height above sea level maximum	6560 ft
charge-13-140 *Fambient temperature-30-13• during storage-30-140 *F• during storage-30-140 *C• during operationUSAContactorUSAContactor30 Ampnumber of NC contacts for main contacts6operating voltage for main contacts6operating voltage for main contacts6operating voltage for main contacts6operating voltage for main contacts100000Type of main contacts of the main contacts100000reach and using the main contacts of lighting contactor100000• with electronic ballast [LED driver] (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at tersistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated v	ambient temperature [°F]	
ambient temperature -30 +65 °C • during storage -30 +65 °C • during operation -25 +40 °C country of origin USA Contactor 30 Amp number of NO contacts for main contacts 5 number of NC contacts for main contacts 6 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 600 V Type of main contacts 5 in unber of NC contacts for main contacts 6 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 600 V Type of main contacts 5 contactoring of the main contacts 100000 • with electronic ballast [LED driver] (1 pole per 1 phase) 10A @120V / 3A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (3 poles per 3 phases) rated value 20A @480V 2p 1ph • at ballast (1 pole per 1 phase) rated value 20A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 3p 3ph • at ballast (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at ballast (3 poles per 1 phase) rated value	during storage	-22 +149 °F
• during storage-30 +65 °C• during operation-25 +40 °Ccounty of originUSAContactor30 Ampnumber of NO contacts for main contacts5number of NO contacts for main contacts6operating voltage for main current circuit at AC at 60 Hz600 Vmaximum5Type of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts100000vith electronic balast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph<	during operation	-13 +104 °F
• during operation-25 +40 °Ccountry of originUSAContactorsize of contactor30 Ampnumber of NO contacts for main contacts5operating voltage for main contacts6operating voltage for main current circuit at AC at 60 Hz600 VmaximumSilver alloy, double breakType of main contacts100000mechanical service life (operating cycles) of the main contacts100000• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @480V 2p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at ballast (2 poles per 1 phase) rated value20A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph	ambient temperature	
country of origin USA Contactor 30 Amp number of NO contacts for main contacts 5 number of NC contacts for main contacts 6 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 600 V Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts 100000 contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value • at tungsten (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (3 poles per 3 phases) rated value 20A @600V 2p 1ph • at ballast (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (1 pole per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 3 phases) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 2p 1ph <td>during storage</td> <td>-30 +65 °C</td>	during storage	-30 +65 °C
Contactor 30 Amp number of NO contacts for main contacts 5 number of NC contacts for main contacts 6 operating voltage for main current circuit at AC at 60 Hz 600 V maximum 600 V Type of main contacts 5 contact rating of the main contacts 600 V contact rating of the main contacts 5 vibre lectronic ballast [LED driver] (1 pole per 1 phase) rated value 10A @120V / 3A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 2p 1ph • at ballast (1 pole per 1 phase) rated value 30A @6600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @6600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @6600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @6600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @6600V 2p 1ph • at resistive load (1 pole per 1 phase) rated value 30A @6600V 3p 3ph • at resistive load (2 poles per 1 phase) rated value 30A @6600V 2p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @6600V 2p 1ph • at resistive load (3 poles per 3	during operation	-25 +40 °C
size of contactor 30 Amp number of NO contacts for main contacts 5 number of NC contacts for main contacts 6 operating voltage for main current circuit at AC at 60 Hz maximum 600 V Type of main contacts Silver alloy, double break mechanical service life (operating cycles) of the main contacts typical 100000 contact rating of the main contacts of lighting contactor 10A @120V / 3A @277V 1p 1ph • with electronic ballast [LED driver] (1 pole per 1 phase) rated value 20A @277V 1p 1ph • at tungsten (1 pole per 1 phase) rated value 20A @480V 2p 1ph • at tungsten (2 poles per 1 phase) rated value 20A @480V 3p 3ph • at ballast (2 poles per 3 phases) rated value 30A @600V 3p 3ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at ballast (2 poles per 3 phases) rated value 30A @600V 2p 1ph • at ballast (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph <	country of origin	USA
number of NO contacts for main contacts5number of NC contacts for main contacts6operating voltage for main current circuit at AC at 60 Hz maximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (2 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (2 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (2 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 pol	Contactor	
number of NC contacts for main contacts6operating voltage for main current circuit at AC at 60 Hz maximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value30A @600V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive lo	size of contactor	30 Amp
operating voltage for main current circuit at AC at 60 Hz maximum600 VType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 3p 3ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @6	number of NO contacts for main contacts	5
maximumSilver alloy, double breakType of main contactsSilver alloy, double breakmechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor10A @120V / 3A @277V 1p 1ph• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated val	number of NC contacts for main contacts	6
mechanical service life (operating cycles) of the main contacts typical100000contact rating of the main contacts of lighting contactor • with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• Auxiliary contacts0number of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0		600 V
typicalcontact rating of the main contacts of lighting contactor• with electronic ballast [LED driver] (1 pole per 1 phase) rated value• at tungsten (1 pole per 1 phase) rated value• at tungsten (2 poles per 1 phase) rated value• at tungsten (3 poles per 3 phases) rated value• at ballast (1 pole per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at ballast (2 poles per 1 phase) rated value• at resistive load (1 pole per 1 phase) rated value• at resistive load (2 poles per 1 phase) rated value• at resistive load (2 poles per 1 phase) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (1 pole per 1 phase) rated value• at resistive load (2 poles per 3 phases) rated value• at resistive load (2 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (3 poles per 3 phases) rated value• at resistive load (5 poles per 3 phases) rated value•	Type of main contacts	Silver alloy, double break
• with electronic ballast [LED driver] (1 pole per 1 phase) rated value10A @120V / 3A @277V 1p 1ph• at tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at ballast (3 poles per 3 phases) rated value30A @600V 1p 1ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 1 phase) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (5 poles per 3 phases) rated value30A @600V 3p 3ph <tr <tr="">• at resi</tr>		100000
rated valueat tungsten (1 pole per 1 phase) rated value20A @277V 1p 1ph• at tungsten (2 poles per 1 phase) rated value20A @480V 2p 1ph• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (2 poles per 3 phases) rated value30A @600V 3p 3ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3ph• number of NC contacts for auxiliary contacts0• number of NO contacts for auxiliary contacts0	contact rating of the main contacts of lighting contactor	
 at tungsten (2 poles per 1 phase) rated value at tungsten (3 poles per 3 phases) rated value at ballast (1 pole per 1 phase) rated value at ballast (2 poles per 1 phase) rated value at ballast (2 poles per 1 phase) rated value at ballast (3 poles per 3 phases) rated value at ballast (3 poles per 3 phases) rated value at resistive load (1 pole per 1 phase) rated value at resistive load (2 poles per 1 phase) rated value at resistive load (2 poles per 1 phase) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) at resistive load (3 poles per 3 phases) at resistive load (3 poles per 3 phases) at resistive		10A @120V / 3A @277V 1p 1ph
• at tungsten (3 poles per 3 phases) rated value20A @480V 3p 3ph• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3phAuxiliary contact30A @600V 3p 3phnumber of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0	 at tungsten (1 pole per 1 phase) rated value 	20A @277V 1p 1ph
• at ballast (1 pole per 1 phase) rated value30A @347V 1p 1ph• at ballast (2 poles per 1 phase) rated value30A @600V 2p 1ph• at ballast (3 poles per 3 phases) rated value30A @600V 3p 3ph• at resistive load (1 pole per 1 phase) rated value30A @600V 1p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (2 poles per 1 phase) rated value30A @600V 2p 1ph• at resistive load (3 poles per 3 phases) rated value30A @600V 3p 3phAuxiliary contact30A @600V 3p 3phnumber of NC contacts for auxiliary contacts0number of NO contacts for auxiliary contacts0	 at tungsten (2 poles per 1 phase) rated value 	20A @480V 2p 1ph
 at ballast (2 poles per 1 phase) rated value at ballast (3 poles per 3 phases) rated value at resistive load (1 pole per 1 phase) rated value at resistive load (2 poles per 1 phase) rated value at resistive load (2 poles per 1 phase) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at resistive load (3 poles per 3 phases) rated value at res	 at tungsten (3 poles per 3 phases) rated value 	20A @480V 3p 3ph
• at ballast (3 poles per 3 phases) rated value 30A @600V 3p 3ph • at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph • at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact 30A @600V 3p 3ph number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at ballast (1 pole per 1 phase) rated value 	30A @347V 1p 1ph
at resistive load (1 pole per 1 phase) rated value 30A @600V 1p 1ph at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at ballast (2 poles per 1 phase) rated value 	30A @600V 2p 1ph
• at resistive load (2 poles per 1 phase) rated value 30A @600V 2p 1ph • at resistive load (3 poles per 3 phases) rated value 30A @600V 3p 3ph Auxiliary contact 30A @600V 3p 3ph number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at ballast (3 poles per 3 phases) rated value 	30A @600V 3p 3ph
	 at resistive load (1 pole per 1 phase) rated value 	30A @600V 1p 1ph
Auxiliary contact number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	• at resistive load (2 poles per 1 phase) rated value	30A @600V 2p 1ph
number of NC contacts for auxiliary contacts 0 number of NO contacts for auxiliary contacts 0	 at resistive load (3 poles per 3 phases) rated value 	30A @600V 3p 3ph
number of NO contacts for auxiliary contacts 0	Auxiliary contact	
	number of NC contacts for auxiliary contacts	0
number of total auxiliary contacts maximum 4	number of NO contacts for auxiliary contacts	0
	number of total auxiliary contacts maximum	4

control supply voltage • at AC at 60 Hz rated value apparent pick-up power of magnet coil at AC : apparent holding power of magnet coil at AC : operating range factor control supply voltage rated value of magnet coil :	AC 347 347 V 248 VA 28 VA 0.85 1.1
control supply voltage • at AC at 60 Hz rated value apparent pick-up power of magnet coil at AC : apparent holding power of magnet coil at AC : operating range factor control supply voltage rated value of magnet coil :	347 347 V 248 VA 28 VA 0.85 1.1
at AC at 60 Hz rated value apparent pick-up power of magnet coil at AC apparent holding power of magnet coil at AC operating range factor control supply voltage rated value of magnet coil	248 VA 28 VA 0.85 1.1
at AC at 60 Hz rated value apparent pick-up power of magnet coil at AC apparent holding power of magnet coil at AC operating range factor control supply voltage rated value of magnet coil	248 VA 28 VA 0.85 1.1
apparent holding power of magnet coil at AC operating range factor control supply voltage rated value of magnet coil	28 VA 0.85 1.1
apparent holding power of magnet coil at AC operating range factor control supply voltage rated value of magnet coil	0.85 1.1
magnet coil	
Enclosure	
degree of protection NEMA rating of the enclosure	NEMA 4x 304 stainless steel enclosure
design of the housing	dustproof, waterproof & resistant to corrosion
Mounting/wiring	
mounting position	Vertical
fastening method	Surface mounting and installation
type of electrical connection for supply voltage line-side	Screw-type terminals
tightening torque [lbf·in] for supply	35 35 lbf·in
type of connectable conductor cross-sections at line-side for AWG cables single or multi-stranded	2x (14 8 AWG)
temperature of the conductor for supply maximum permissible	75 °C
material of the conductor for supply	CU
type of electrical connection for load-side outgoing feeder	Screw-type terminals
tightening torque [lbf·in] for load-side outgoing feeder	35 35 lbf-in
type of connectable conductor cross-sections for AWG cables for load-side outgoing feeder single or multi-stranded	2x (14 8 AWG)
temperature of the conductor for load-side outgoing feeder maximum permissible	75 °C
material of the conductor for load-side outgoing feeder	CU
type of electrical connection of magnet coil	Screw-type terminals
tightening torque [lbf·in] at magnet coil	15 15 lbf-in
type of connectable conductor cross-sections of magnet coil for AWG cables single or multi-stranded	2x (18 14 AWG)
temperature of the conductor at magnet coil maximum permissible	75 °C
material of the conductor at magnet coil	CU
Short-circuit current rating	
design of the fuse link for short-circuit protection of the main circuit required	100kA@600V (Class R or J 40A max)
design of the short-circuit trip	Thermal magnetic circuit breaker
maximum short-circuit current breaking capacity (Icu)	
• at 240 V	24 kA
• at 480 V	65 kA
• at 600 V	25 kA
certificate of suitability	NEMA ICS 2; UL 508
Approvals Certificates	
Test Certificates	




Further information


Industrial Controls - Product Overview (Catalogs, Brochures,...) www.usa.siemens.com/iccatalog Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:LCE04C605347A Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/US/en/ps/US2:LCE04C605347A

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:LCE04C605347A&lang=en

Certificates/approvals

https://support.industry.siemens.com/cs/US/en/ps/US2:LCE04C605347A/certificate

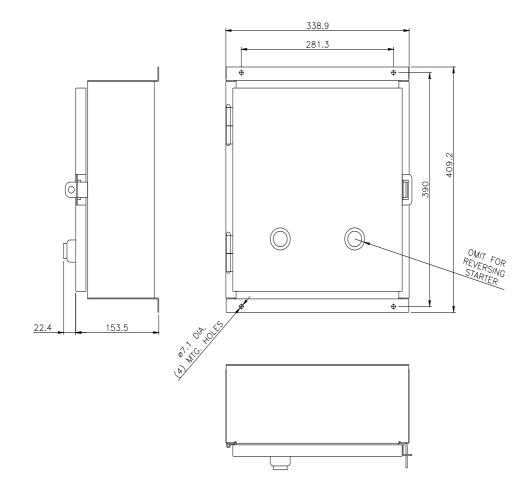

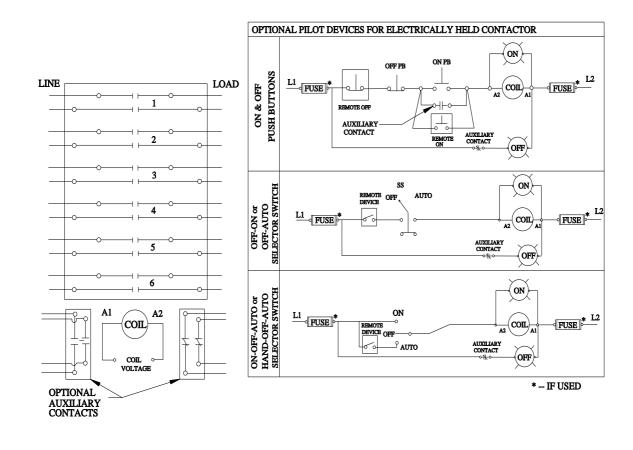

D38297001

last modified:

4/5/2023 🖸