



P-DUKE POWER


MPU02 Series

DC-DC Converter
Up to 2 Watts

5
YEARS
WARRANTY

ROHS
COMPLIANT

REACH
COMPLIANT

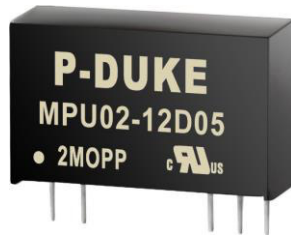

Medical



PV



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Railway



2 x MOPP	LOW Leakage Current	5000 VAC Reinforced Insulation	Operating Altitude 5000 meter	HIGH Efficiency	SEMI Regulated	SCP
-----------------------	----------------------------------	--	---	---------------------------	--------------------------	------------

PART NUMBER STRUCTURE


MPU02 -	05	S	05
Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)
	05: 4.5~7 12: 9.6~14.4 15: 12~18 24: 19.2~28.8	S: Single D: Dual	3P3: 3.3 05: 5 12: 12 15: 15 05: ± 5 12: ±12 15: ±15

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C unless otherwise noted


Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	μF
MPU02-05S3P3	4.5 ~ 7	3.3	600	5	78	2000
MPU02-05S05	4.5 ~ 7	5	400	5	81	820
MPU02-05S12	4.5 ~ 7	12	167	20	83	470
MPU02-05S15	4.5 ~ 7	15	134	20	83	470
MPU02-05D05	4.5 ~ 7	±5	±200	5	82	±470
MPU02-05D12	4.5 ~ 7	±12	±83	20	83	±220
MPU02-05D15	4.5 ~ 7	±15	±67	25	81	±220
MPU02-12S3P3	9.6 ~ 14.4	3.3	600	4	79	2000
MPU02-12S05	9.6 ~ 14.4	5	400	4	81	820
MPU02-12S12	9.6 ~ 14.4	12	167	10	84	470
MPU02-12S15	9.6 ~ 14.4	15	134	10	83	470
MPU02-12D05	9.6 ~ 14.4	±5	±200	4	81	±470
MPU02-12D12	9.6 ~ 14.4	±12	±83	10	83	±220
MPU02-12D15	9.6 ~ 14.4	±15	±67	10	82	±220
MPU02-15S3P3	12 ~ 18	3.3	600	4	79	2000
MPU02-15S05	12 ~ 18	5	400	4	81	820
MPU02-15S12	12 ~ 18	12	167	8	84	470
MPU02-15S15	12 ~ 18	15	134	8	83	470
MPU02-15D05	12 ~ 18	±5	±200	4	81	±470
MPU02-15D12	12 ~ 18	±12	±83	8	83	±220
MPU02-15D15	12 ~ 18	±15	±67	8	80	±220
MPU02-24S3P3	19.2 ~ 28.8	3.3	600	3	78	2000
MPU02-24S05	19.2 ~ 28.8	5	400	3	80	820
MPU02-24S12	19.2 ~ 28.8	12	167	6	82	470
MPU02-24S15	19.2 ~ 28.8	15	134	6	82	470
MPU02-24D05	19.2 ~ 28.8	±5	±200	3	81	±470
MPU02-24D12	19.2 ~ 28.8	±12	±83	6	81	±220
MPU02-24D15	19.2 ~ 28.8	±15	±67	6	80	±220

INPUT SPECIFICATIONS						
Parameter	Conditions	Min.	Typ.	Max.	Unit	
Operating input voltage range		5Vin(nom)	4.5	5	7	VDC
		12Vin(nom)	9.6	12	14.4	
		15Vin(nom)	12	15	18	
		24Vin(nom)	19.2	24	28.8	
Input surge voltage	1 second, max.	5Vin(nom)			15	VDC
		12Vin(nom)			25	
		15Vin(nom)			25	
		24Vin(nom)			35	
		If the input will be switched electromechanically, the input should install an external 47μF/63V E/C. to avoid voltage transient.				


CHARACTERISTIC CURVE

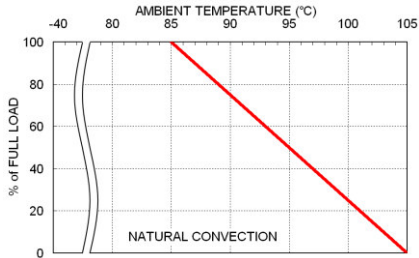


MPU02-24S05 Derating Curve

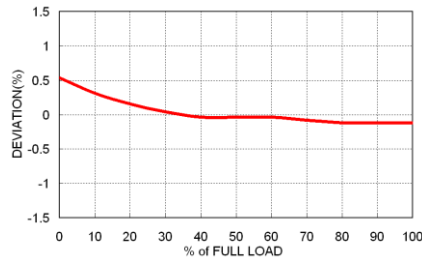

MPU02-24S05 Vout Deviation vs. Output Load

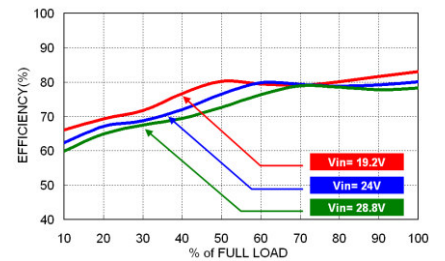

MPU02-24S05 Efficiency vs. Output Load

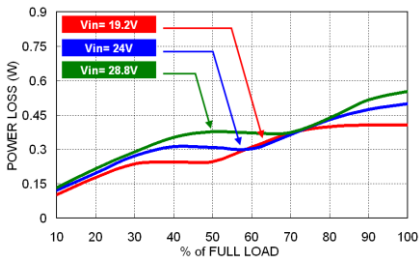

MPU02-24S05 Power Dissipation vs. Output Load

FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.


To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.

The input line fuse suggest as below :

Modules	Fuse Rating (A)	Fuse Type
MPU02-05S□□、MPU02-05D□□	1.00	Slow-Blow
MPU02-12S□□、MPU02-12D□□	0.50	Slow-Blow
MPU02-15S□□、MPU02-15D□□	0.50	Slow-Blow
MPU02-24S□□、MPU02-24D□□	0.315	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin..

MECHANICAL DRAWING

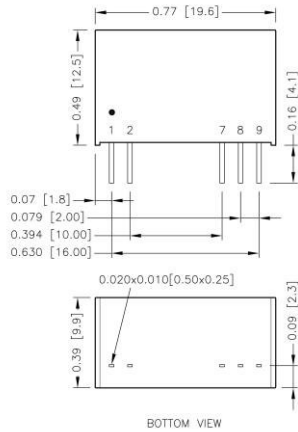


PIN CONNECTION

PIN	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
7	-Vout	-Vout
8	No pin	Common
9	+Vout	+Vout

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.xx±0.5]
x.xxx±0.01 [x.xx±0.25]
3. Pin dimension tolerance ±0.004[0.10]

RECOMMENDED PAD LAYOUT

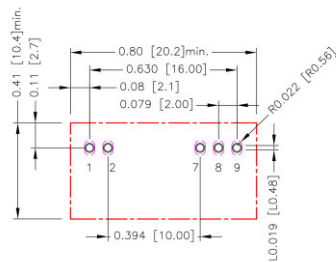


- * There should be at least 8mm distance between primary and secondary circuit.
- ** For further information, please contact P-DUKE.

All dimensions in inch[mm]
 Pad size(lead free recommended)
 Through hole 1.2.7.8.9: $\varnothing 0.031[0.80]$
 Top view pad 1.2.7.8.9: $\varnothing 0.039[1.00]$
 Bottom view pad 1.2.7.8.9:
 Groove R0.022[0.56] L0.019[0.48]

THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments. However, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding environment. Proper cooling can be verified by measuring the point as the figure below. The temperature at this location should not exceed "Maximum case temperature". When operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature". You can limit this temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).



TOP VIEW