

1018853

<https://www.phoenixcontact.com/us/products/1018853>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Base with integrated M12 male (5 pins)

Product description

This connection element is intended to be part of a modular signal tower and is used to electrically connect the tower. According to your requirements, a signal tower may comprise any combination of up to four signal elements. You may use up to four optical signal elements or up to three optical and one audible signal element. Only use an audible signal element as the top element. A bayonet locking system establishes the mechanical and electrical connection between the elements. Please note that PSD-S 50 signal towers (50 mm diameter) are not mechanically compatible with PSD-S signal towers (70 mm diameter).

Your advantages

- Connecting element for installing on an M12 mounting thread
- M12 connection technology (5-pos.)
- Degree of protection: IP65, when mounted

Commercial data

Item number	1018853
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DR07
Product key	DRL116
GTIN	4055626504827
Weight per piece (including packing)	105.8 g
Weight per piece (excluding packing)	105.8 g
Customs tariff number	85319000
Country of origin	AT

PSD-S 50 CE-M12-5P - Connection element



1018853

<https://www.phoenixcontact.com/us/products/1018853>

Technical data


Product properties

Product type	Assembly element
Scope of delivery	End cover and seal
Number of mountable signal elements	max. 4

Connection data

Connection method	M12
Stripping length	7 mm

Dimensions

Dimensional drawing	
Height	90 mm
Diameter	50 mm

Material specifications

Color	black
Material	PA-GF

Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP65 (when installed)
Ambient temperature (operation)	-30 °C ... 60 °C

EMC data

Electromagnetic compatibility	Conformance with EMC directive 2004/108/EC and for low-voltage directive 2006/95/EC
-------------------------------	---

Mounting

Mounting type	M12 mounting threads
Assembly note	Seal included
Mounting position	any

PSD-S 50 CE-M12-5P - Connection element





1018853

<https://www.phoenixcontact.com/us/products/1018853>

Drawings

Dimensional drawing

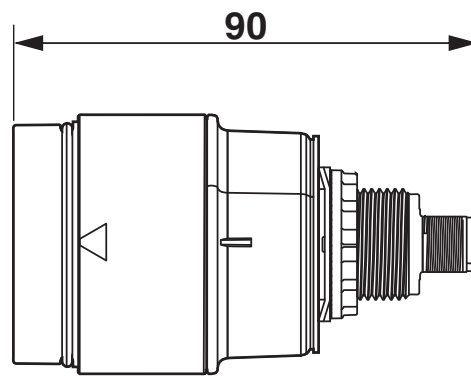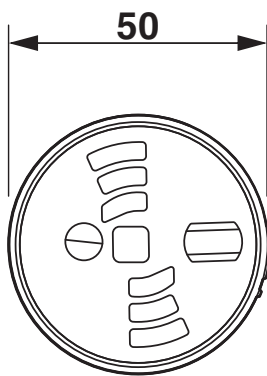

PSD-S 50 CE-M12-5P - Connection element



1018853

<https://www.phoenixcontact.com/us/products/1018853>

Approvals

 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1018853>



UL Listed

Approval ID: FILE E 140324



cUL Listed

Approval ID: FILE E 140324

cULus Listed

PSD-S 50 CE-M12-5P - Connection element



1018853

<https://www.phoenixcontact.com/us/products/1018853>

Classifications

ECLASS

ECLASS-11.0	27371232
ECLASS-12.0	27371232
ECLASS-13.0	27371232

ETIM

ETIM 9.0	EC001152
----------	----------

UNSPSC

UNSPSC 21.0	46171600
-------------	----------

PSD-S 50 CE-M12-5P - Connection element



1018853

<https://www.phoenixcontact.com/us/products/1018853>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

PSD-S 50 CE-M12-5P - Connection element

1018853

<https://www.phoenixcontact.com/us/products/1018853>



Accessories

PSD-S 50 ME BR-M12 M - Mounting bracket

1094143

<https://www.phoenixcontact.com/us/products/1094143>



Metal bracket for products with M12 assembly thread

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com