SIEMENS

3RW5075-2TB05 **Data sheet**



SIRIUS soft starter 200-600 V 370 A, 24 V AC/DC Spring-loaded terminals Thermistor input

Figure similar

product brand name	SIRIUS
product category	Hybrid switching devices
product designation	Soft starter
product type designation	3RW50
manufacturer's article number	
of standard HMI module usable	3RW5980-0HS01
of high feature HMI module usable	3RW5980-0HF00
of communication module PROFINET standard usable	3RW5980-0CS00
of communication module PROFIBUS usable	3RW5980-0CP00
of communication module Modbus TCP usable	3RW5980-0CT00
of communication module Modbus RTU usable	3RW5980-0CR00
of communication module Ethernet/IP	3RW5980-0CE00
 of circuit breaker usable at 400 V 	3VA2580-6HN32-0AA0; Type of assignment 1, Iq = 65 kA
 of circuit breaker usable at 500 V 	3VA2580-6HN32-0AA0; Type of assignment 1, Iq = 65 kA
• of the gG fuse usable up to 690 V	2x3NA3365-6; Type of coordination 1, Iq = 65 kA
of full range R fuse link for semiconductor protection usable up to 690 V	3NE1 334-2; Type of coordination 2, Iq = 65 kA
• of back-up R fuse link for semiconductor protection usable up to 690 V	3NE3 336; Type of coordination 2, Iq = 65 kA
 of line contactor usable up to 480 V 	<u>3RT1075</u>
 of line contactor usable up to 690 V 	<u>3RT1075</u>
Seneral technical data	
starting voltage [%]	30 100 %
stopping voltage [%]	50 %; non-adjustable
start-up ramp time of soft starter	0 20 s
ramp-down time of soft starter	0 20 s
current limiting value [%] adjustable	130 700 %
certificate of suitability	
CE marking	Yes
UL approval	Yes
CSA approval	Yes
product component	
HMI-High Feature	No
• is supported HMI-Standard	Yes
is supported HMI-High Feature	Yes
product feature integrated bypass contact system	Yes
number of controlled phases	2
trip class	CLASS 10A / 10E (preset) / 20E; acc. to IEC 60947-4-2
buffering time in the event of power failure	
for main current circuit	100 ms

e for control circuit	100 mg		
• for control circuit	100 ms		
insulation voltage rated value	600 V		
degree of pollution	3, acc. to IEC 60947-4-2		
impulse voltage rated value	6 kV		
blocking voltage of the thyristor maximum	1 600 V		
service factor	1		
surge voltage resistance rated value	6 kV		
maximum permissible voltage for protective separation	2001/		
between main and auxiliary circuit	600 V		
shock resistance	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting		
vibration resistance	15 mm to 6 Hz; 2g to 500 Hz		
utilization category according to IEC 60947-4-2	AC-53a		
reference code according to IEC 81346-2	Q 00/02/2040		
Substance Prohibitance (Date)	09/23/2019		
product function	Von		
• ramp-up (soft starting)	Yes		
• ramp-down (soft stop)	Yes		
Soft Torque adjustable current limitation	Yes		
adjustable current limitation	Yes		
pump ramp down intrinsic dovice protection	Yes		
intrinsic device protection mater everland protection	Yes		
motor overload protection	Yes; Full motor protection (thermistor motor protection and electronic motor overload protection)		
evaluation of thermistor motor protection	Yes; Type A PTC or Klixon / Thermoclick		
auto-RESET	Yes		
• manual RESET	Yes		
• remote reset	Yes; By turning off the control supply voltage		
communication function	Yes		
operating measured value display	Yes; Only in conjunction with special accessories		
error logbook via aeftware parameterizable	Yes; Only in conjunction with special accessories		
via software parameterizable	No Voc		
• via software configurable	Yes		
PROFlenergyvoltage ramp	Yes; in connection with the PROFINET Standard communication module Yes		
torque control	No		
analog output	No		
Power Electronics	NO		
operational current			
at 40 °C rated value	370 A		
at 50 °C rated value	328 A		
at 50 °C rated value at 60 °C rated value	328 A 300 A		
operating voltage	000 A		
rated value	200 600 V		
relative negative tolerance of the operating voltage	-15 %		
relative negative tolerance of the operating voltage	10 %		
operating power for 3-phase motors			
at 230 V at 40 °C rated value	110 kW		
at 400 V at 40 °C rated value	200 kW		
at 500 V at 40 °C rated value	250 kW		
Operating frequency 1 rated value	50 Hz		
Operating frequency 2 rated value	60 Hz		
relative negative tolerance of the operating frequency	-10 %		
relative positive tolerance of the operating frequency	10 %		
adjustable motor current			
at rotary coding switch on switch position 1	160 A		
at rotary coding switch on switch position 2	174 A		
 at rotary coding switch on switch position 3 	188 A		
at rotary coding switch on switch position 4	202 A		
at rotary coding switch on switch position 5	216 A		
at rotary coding switch on switch position 6	230 A		
at rotary coding switch on switch position 7	244 A		

 at rotary coding switch on switch position 8 	258 A
 at rotary coding switch on switch position 9 	272 A
 at rotary coding switch on switch position 10 	286 A
 at rotary coding switch on switch position 11 	300 A
 at rotary coding switch on switch position 12 	314 A
 at rotary coding switch on switch position 13 	328 A
 at rotary coding switch on switch position 14 	342 A
at rotary coding switch on switch position 15	356 A
at rotary coding switch on switch position 16	370 A
minimum	160 A
minimum load [%]	15 %; Relative to smallest settable le
	10 %, Relative to Stitaliest Settable le
power loss [W] for rated value of the current at AC	00.14
• at 40 °C after startup	36 W
• at 50 °C after startup	29 W
at 60 °C after startup	24 W
power loss [W] at AC at current limitation 350 %	
 at 40 °C during startup 	3 726 W
 at 50 °C during startup 	3 124 W
at 60 °C during startup	2 748 W
type of the motor protection	Electronic, tripping in the event of thermal overload of the motor
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage at AC	
at 50 Hz rated value	24 V
at 60 Hz rated value	24 V
relative negative tolerance of the control supply voltage at AC at 50 Hz	-20 %
relative positive tolerance of the control supply voltage at AC at 50 Hz	20 %
relative negative tolerance of the control supply voltage at AC at 60 Hz	-20 %
relative positive tolerance of the control supply voltage at AC at 60 Hz	20 %
control supply voltage frequency	50 60 Hz
relative negative tolerance of the control supply voltage	-10 %
frequency	
relative positive tolerance of the control supply voltage frequency	10 %
relative positive tolerance of the control supply voltage frequency control supply voltage	
relative positive tolerance of the control supply voltage frequency control supply voltage • at DC rated value	24 V
relative positive tolerance of the control supply voltage frequency control supply voltage • at DC rated value relative negative tolerance of the control supply voltage at DC	24 V -20 %
relative positive tolerance of the control supply voltage frequency control supply voltage • at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC	24 V -20 % 20 %
relative positive tolerance of the control supply voltage frequency control supply voltage • at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply current in standby mode rated value	24 V -20 % 20 % 160 mA
relative positive tolerance of the control supply voltage frequency control supply voltage • at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply current in standby mode rated value holding current in bypass operation rated value	24 V -20 % 20 % 160 mA 490 mA
relative positive tolerance of the control supply voltage frequency control supply voltage • at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply current in standby mode rated value	24 V -20 % 20 % 160 mA
relative positive tolerance of the control supply voltage frequency control supply voltage • at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum	24 V -20 % 20 % 160 mA 490 mA
relative positive tolerance of the control supply voltage frequency control supply voltage • at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage	24 V -20 % 20 % 160 mA 490 mA 7.6 A
relative positive tolerance of the control supply voltage frequency control supply voltage • at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply	24 V -20 % 20 % 160 mA 490 mA 7.6 A 3.3 A
relative positive tolerance of the control supply voltage frequency control supply voltage • at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage	24 V -20 % 20 % 160 mA 490 mA 7.6 A 3.3 A 12.1 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of
relative positive tolerance of the control supply voltage frequency control supply voltage • at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit	24 V -20 % 20 % 160 mA 490 mA 7.6 A 3.3 A 12.1 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit
relative positive tolerance of the control supply voltage frequency control supply voltage • at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit	24 V -20 % 20 % 160 mA 490 mA 7.6 A 3.3 A 12.1 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
relative positive tolerance of the control supply voltage frequency control supply voltage • at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit	24 V -20 % 20 % 160 mA 490 mA 7.6 A 3.3 A 12.1 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
relative positive tolerance of the control supply voltage frequency control supply voltage • at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital inputs number of digital outputs	24 V -20 % 20 % 160 mA 490 mA 7.6 A 3.3 A 12.1 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
relative positive tolerance of the control supply voltage frequency control supply voltage • at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital inputs number of digital outputs • not parameterizable	24 V -20 % 20 % 160 mA 490 mA 7.6 A 3.3 A 12.1 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu=600 A), C6 miniature circuit breaker (Icu=300 A); Is not part of scope of supply
relative positive tolerance of the control supply voltage frequency control supply voltage • at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital outputs • not parameterizable digital output version	24 V -20 % 20 % 160 mA 490 mA 7.6 A 3.3 A 12.1 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO)
relative positive tolerance of the control supply voltage frequency control supply voltage • at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital outputs • not parameterizable digital output version number of analog outputs	24 V -20 % 20 % 160 mA 490 mA 7.6 A 3.3 A 12.1 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply
relative positive tolerance of the control supply voltage frequency control supply voltage • at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital inputs • not parameterizable digital output version number of analog outputs switching capacity current of the relay outputs	24 V -20 % 20 % 160 mA 490 mA 7.6 A 3.3 A 12.1 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO) 0
relative positive tolerance of the control supply voltage frequency control supply voltage • at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply current in standby mode rated value holding current in bypass operation rated value inrush current by closing the bypass contacts maximum inrush current peak at application of control supply voltage maximum duration of inrush current peak at application of control supply voltage design of the overvoltage protection design of short-circuit protection for control circuit Inputs/ Outputs number of digital outputs • not parameterizable digital output version number of analog outputs	24 V -20 % 20 % 160 mA 490 mA 7.6 A 3.3 A 12.1 ms Varistor 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply 1 3 2 2 normally-open contacts (NO) / 1 changeover contact (CO)

nstallation/ mounting/ dimensions		
mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back	
fastening method	screw fixing	
height	230 mm	
width	160 mm	
depth	282 mm	
required spacing with side-by-side mounting		
• forwards	10 mm	
backwards	0 mm	
• upwards	100 mm	
downwards	75 mm	
at the side	5 mm	
weight without packaging	7.3 kg	
onnections/ Terminals		
type of electrical connection		
for main current circuit	busbar connection	
for control circuit	spring-loaded terminals	
width of connection bar maximum	35 mm; with connection cover 3RT1966-4EA1 maximum length 45 mm	
wire length for thermistor connection		
with conductor cross-section = 0.5 mm² maximum	50 m	
with conductor cross-section = 1.5 mm² maximum	150 m	
with conductor cross-section = 2.5 mm² maximum	250 m	
type of connectable conductor cross-sections		
for main contacts for box terminal using the front clamping point solid	95 300 mm²	
• for main contacts for box terminal using the front clamping point finely stranded with core end processing	70 240 mm²	
• for main contacts for box terminal using the front clamping point finely stranded without core end processing	70 240 mm²	
 for main contacts for box terminal using the front clamping point stranded 	95 300 mm²	
 for main contacts for box terminal using the back clamping point solid 	120 240 mm²	
for AWG cables for main contacts for box terminal using the back clamping point	250 500 kcmil	
 for main contacts for box terminal using both clamping points solid for main contacts for box terminal using both clamping 	min. 2x 70 mm², max. 2x 240 mm²	
points finely stranded with core end processing • for main contacts for box terminal using both clamping	min. 2x 50 mm², max. 2x 185 mm² min. 2x 50 mm², max. 2x 185 mm²	
points finely stranded without core end processing • for main contacts for box terminal using both clamping	min. 2x 70 mm², max. 2x 240 mm²	
points strandedfor main contacts for box terminal using the back	120 185 mm ²	
 clamping point finely stranded with core end processing for main contacts for box terminal using the back clamping point finely stranded without core end processing 	120 185 mm²	
for main contacts for box terminal using the back clamping point stranded	120 240 mm²	
type of connectable conductor cross-sections		
for AWG cables for main current circuit solid	2/0 500 kcmil	
for DIN cable lug for main contacts stranded	50 240 mm²	
for DIN cable lug for main contacts finely stranded	70 240 mm²	
type of connectable conductor cross-sections		
• for control circuit solid	2x (0.25 1.5 mm²)	
for control circuit solid for control circuit finely stranded with core end processing	2x (0.25 1.5 mm²)	
for AWG cables for control circuit solid	2x (24 16)	
for AWG cables for control circuit finely stranded with core end processing	2x (24 16) 2x (24 16)	
wire length		
between soft starter and motor maximum	800 m	
at the digital inputs at AC maximum	1 000 m	
tightening torque		
for main contacts with screw-type terminals	14 24 N·m	

PROFIBUS UL/CSA ratings	Yes	
UL/CSA ratings		
manufacturer's article number		
of the fuse		
 usable for Standard Faults up to 575/600 V according to UL 	Type: Class L, max. 1200 A; Iq = 18 kA	
usable for High Faults up to 575/600 V according to UL	Type: Class L, max. 1200 A; Iq = 100 kA	
operating power [hp] for 3-phase motors		
• at 200/208 V at 50 °C rated value	100 hp	
• at 220/230 V at 50 °C rated value	125 hp	
• at 460/480 V at 50 °C rated value	250 hp	
• at 575/600 V at 50 °C rated value	300 hp	
Safety related data	000 rip	
	JPAG JPAG JI	
protection class IP on the front according to IEC 60529	IP00; IP20 with cover	
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with cover	
ATEX		
certificate of suitability	V	
• ATEX	Yes	
• IECEx	Yes	
• UKEX		
	Yes	
hardware fault tolerance according to IEC 61508 relating to ATEX	0	
PFDavg with low demand rate according to IEC 61508 relating to ATEX	0.09	
PFHD with high demand rate according to EN 62061 relating to ATEX	9E-6 1/h	
Safety Integrity Level (SIL) according to IEC 61508 relating	SIL1	
to ATEX T1 value for proof test interval or service life according to	3 a	
IEC 61508 relating to ATEX		
Certificates/ approvals		
General Product Approval		For use in hazard- ous locations





Confirmation









Explosion Protection Certificate





Type Test Certificates/Test Report



Marine / Shipping

other





Confirmation

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5075-2TB05

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5075-2TB05

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RW5075-2TB05

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5075-2TB05&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RW5075-2TB05/char


Characteristic: Installation altitude


http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5075-2TB05&objecttype=14&gridview=view1

Simulation Tool for Soft Starters (STS)

https://support.industry.siemens.com/cs/ww/en/view/101494917



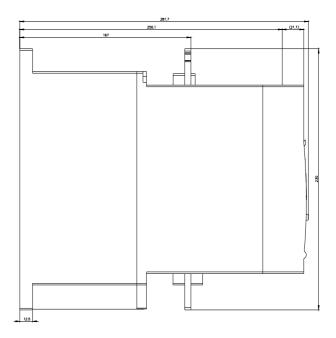

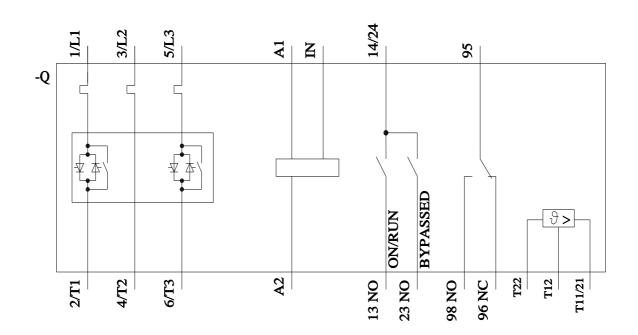

last modified: 1/14/2023 🖸

