

# 74LV123

## Dual retriggerable monostable multivibrator with reset

Rev. 11 — 15 January 2024

Product data sheet

## 1. General description

The 74LV123 is a dual retriggerable monostable multivibrator with reset. The basic output pulse width is programmed by selection of external components ( $R_{EXT}$  and  $C_{EXT}$ ). Once triggered this basic pulse width may be extended by retriggering either of the edge triggered inputs ( $n\bar{A}$  or  $nB$ ). By repeating this process, the output pulse period ( $nQ = HIGH$ ,  $n\bar{Q} = LOW$ ) can be made as long as desired. Alternatively, an output delay can be terminated at any time by a LOW-going edge on input  $n\bar{RD}$ . Control inputs include clamp diodes. This enables the use of current limiting resistors to interface inputs to voltages in excess  $V_{CC}$ . Schmitt-trigger action at  $n\bar{A}$  and  $nB$  inputs makes the circuit tolerant of slower input rise and fall times.

## 2. Features and benefits

- Wide supply voltage range from 1.0 V to 5.5 V
- CMOS low power dissipation
- Latch-up performance exceeds 100 mA per JESD 78 Class II Level B
- Optimized for low-voltage applications: 1.0 V to 3.6 V
- Accepts TTL input levels between  $V_{CC} = 2.7$  V and  $V_{CC} = 3.6$  V
- Typical output ground bounce:  $< 0.8$  V at  $V_{CC} = 3.3$  V and  $T_{amb} = 25$  °C
- Typical HIGH-level output voltage ( $V_{OH}$ ) undershoot:  $> 2$  V at  $V_{CC} = 3.3$  V and  $T_{amb} = 25$  °C
- DC triggered from active HIGH or active LOW inputs
- Retriggerable for very long pulses up to 100 % duty factor
- Direct reset terminates output pulses
- Schmitt-trigger action on all inputs except for the reset input
- Complies with JEDEC standards:
  - JESD8-7 (1.65 V to 1.95 V)
  - JESD8-5 (2.3 V to 2.7 V)
  - JESD8C (2.7 V to 3.6 V)
  - JESD36 (4.5 V to 5.5 V)
- ESD protection:
  - HBM: ANSI/ESDA/JEDEC JS-001 class 2 exceeds 2000 V
  - CDM: ANSI/ESDA/JEDEC JS-002 class C3 exceeds 1000 V
- Multiple package options
- Specified from  $-40$  °C to  $+85$  °C and from  $-40$  °C to  $+125$  °C



## 3. Ordering information

Table 1. Ordering information

| Type number               | Package               |         |  | Version                  |
|---------------------------|-----------------------|---------|--|--------------------------|
|                           | Temperature range     | Name    | Description  |                          |
| <a href="#">74LV123D</a>  | $-40$ °C to $+125$ °C | SO16    | plastic small outline package; 16 leads; body width 3.9 mm             | <a href="#">SOT109-1</a> |
| <a href="#">74LV123PW</a> | $-40$ °C to $+125$ °C | TSSOP16 | plastic thin shrink small outline package; 16 leads; body width 4.4 mm | <a href="#">SOT403-1</a> |

| Type number               | Package           |          |  | Version                  |
|---------------------------|-------------------|----------|--|--------------------------|
|                           | Temperature range | Name     | Description  |                          |
| <a href="#">74LV123BQ</a> | -40 °C to +125 °C | DHVQFN16 | plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads; 16 terminals; body 2.5 × 3.5 × 0.85 mm | <a href="#">SOT763-1</a> |

### 4. Functional diagram

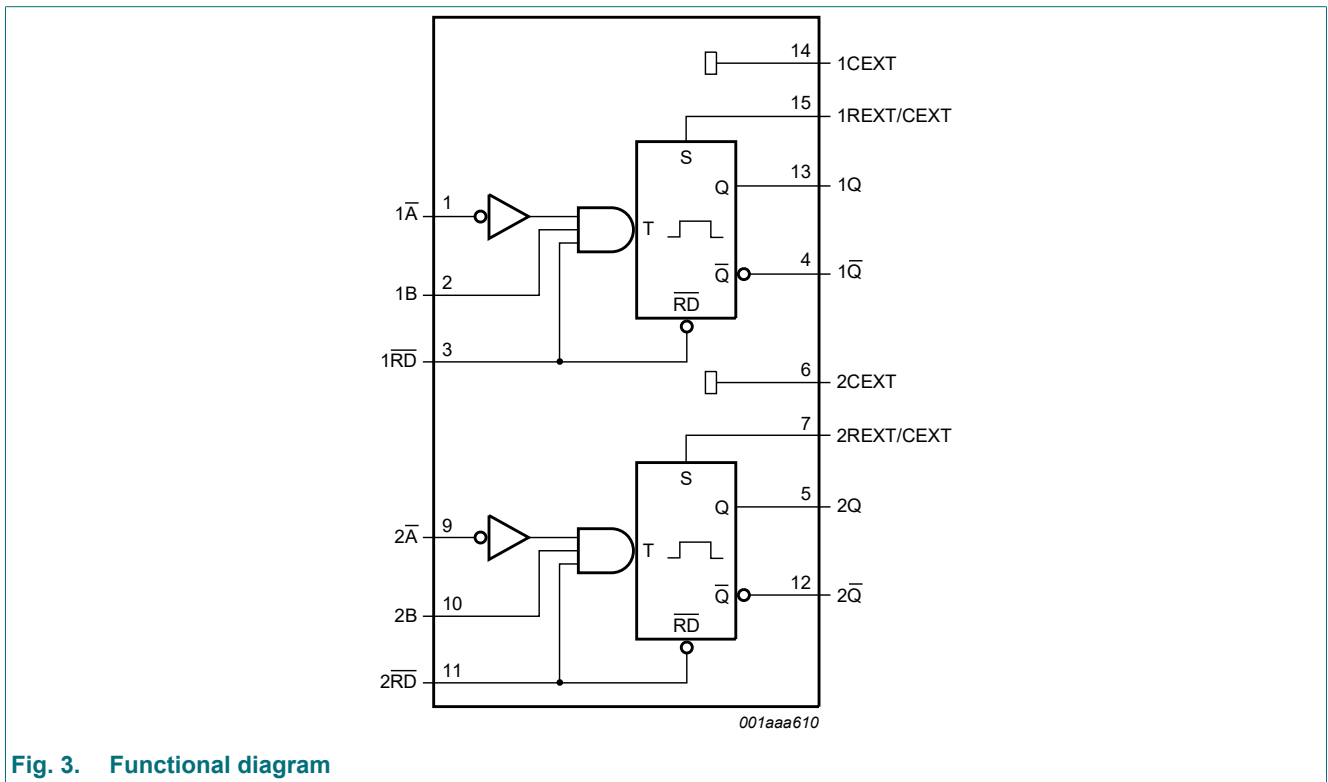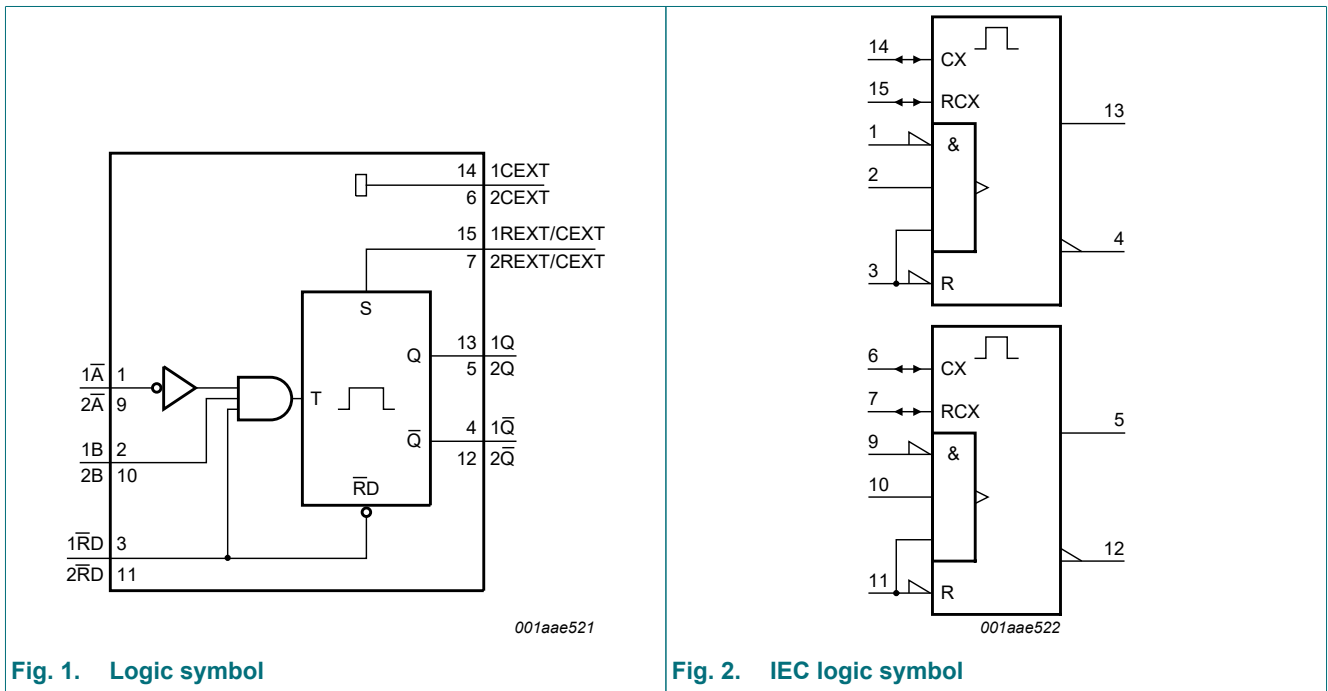


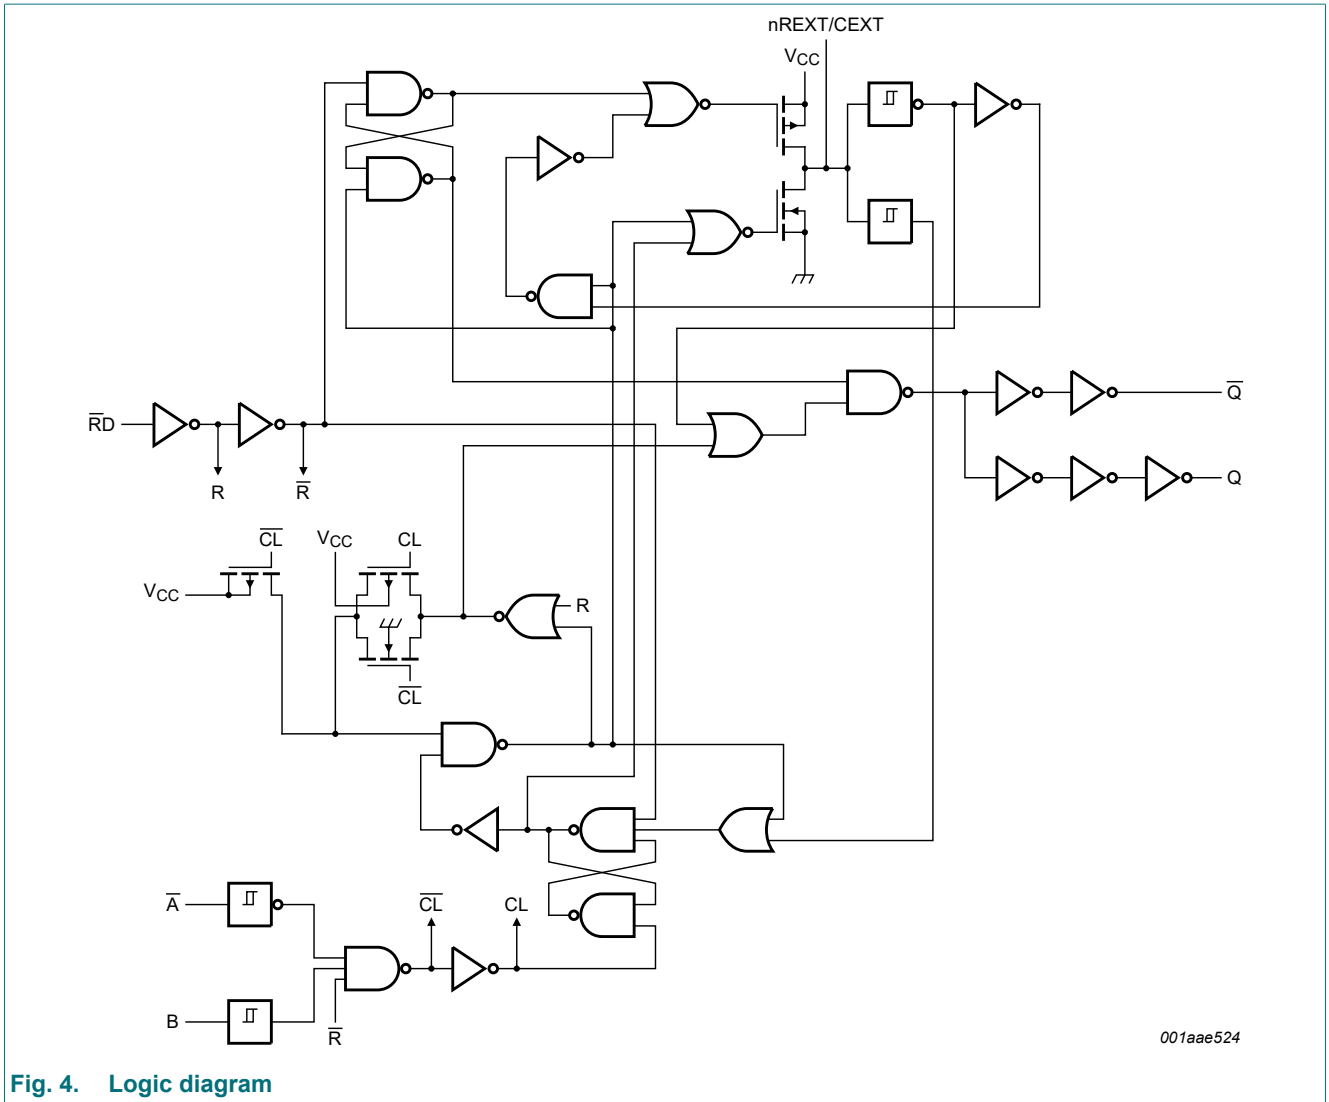


Fig. 4. Logic diagram

## 5. Pinning information

### 5.1. Pinning

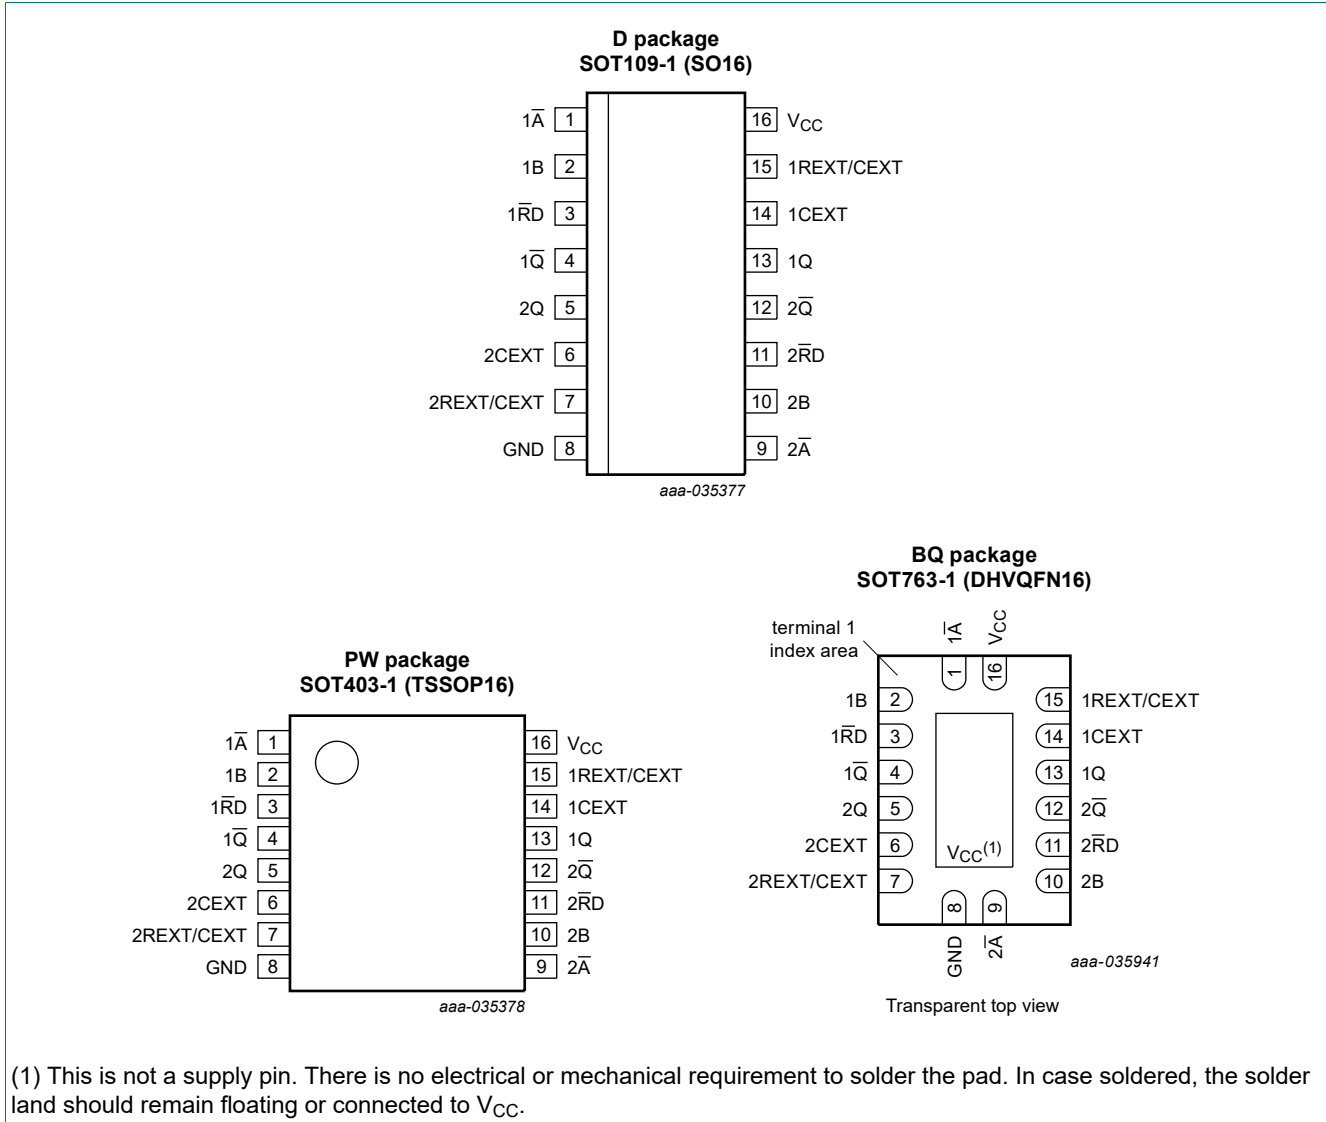

### 5.2. Pin description

Table 2. Pin description

| Symbol     | Pin | Description  |
|------------|-----|--|
| 1A         | 1   | negative-edge triggered input 1                      |
| 1B         | 2   | positive-edge triggered input 1                      |
| 1RD        | 3   | direct reset LOW and positive-edge triggered input 1 |
| 1Q         | 4   | active LOW output 1                                  |
| 2Q         | 5   | active HIGH output 2                                 |
| 2CEXT      | 6   | external capacitor connection 2                      |
| 2REXT/CEXT | 7   | external resistor and capacitor connection 2         |

## Dual retriggerable monostable multivibrator with reset

| Symbol          | Pin | Description  |
|-----------------|-----|--|
| GND             | 8   | ground (0 V)   |
| 2 $\bar{A}$     | 9   | negative-edge triggered input 2                      |
| 2B              | 10  | positive-edge triggered input 2                      |
| 2RD             | 11  | direct reset LOW and positive-edge triggered input 2 |
| 2 $\bar{Q}$     | 12  | active LOW output 2                                  |
| 1Q              | 13  | active HIGH output 1                                 |
| 1CEXT           | 14  | external capacitor connection 1                      |
| 1REXT/CEXT      | 15  | external resistor and capacitor connection 1         |
| V <sub>CC</sub> | 16  | supply voltage                                       |

## 6. Functional description

**Table 3. Function table**

H = HIGH voltage level; L = LOW voltage level; X = don't care;  $\uparrow$  = LOW-to-HIGH transition;  $\downarrow$  = HIGH-to-LOW transition;  $\square$  = one HIGH level output pulse;  $\bar{\square}$  = one LOW level output pulse.

| Input      |              |            | Output    |                 |
|------------|--------------|------------|-----------|-----------------|
| nRD        | n $\bar{A}$  | nB         | nQ        | n $\bar{Q}$     |
| L          | X            | X          | L         | H               |
| X          | H            | X          | L [1]     | H [1]           |
| X          | X            | L          | L [1]     | H [1]           |
| H          | L            | $\uparrow$ | $\square$ | $\bar{\square}$ |
| H          | $\downarrow$ | H          | $\square$ | $\bar{\square}$ |
| $\uparrow$ | L            | H          | $\square$ | $\bar{\square}$ |

[1] If the monostable multivibrator was triggered before this condition was established, the pulse will continue as programmed.

## 7. Limiting values

**Table 4. Limiting values**

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

| Symbol           | Parameter               | Conditions  | Min  | Max  | Unit |
|------------------|-------------------------|---|------|------|------|
| V <sub>CC</sub>  | supply voltage          |   | -0.5 | +7   | V    |
| I <sub>IK</sub>  | input clamping current  | V <sub>I</sub> < -0.5 V or V <sub>I</sub> > V <sub>CC</sub> + 0.5 V                 | [1]  | ±20  | mA   |
| I <sub>OK</sub>  | output clamping current | V <sub>O</sub> < -0.5 V or V <sub>O</sub> > V <sub>CC</sub> + 0.5 V                 | [1]  | ±50  | mA   |
| I <sub>O</sub>   | output current          | except for pins nREXT/CEXT;<br>V <sub>O</sub> = -0.5 V to (V <sub>CC</sub> + 0.5 V) | [1]  | ±25  | mA   |
| I <sub>CC</sub>  | supply current          |   | -    | +50  | mA   |
| I <sub>GND</sub> | ground current          |   | -50  | -    | mA   |
| T <sub>stg</sub> | storage temperature     |   | -65  | +150 | °C   |
| P <sub>tot</sub> | total power dissipation | T <sub>amb</sub> = -40 °C to +125 °C  | [2]  | 500  | mW   |

[1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

[2] For SOT109-1 (SO16) package: P<sub>tot</sub> derates linearly with 12.4 mW/K above 110 °C.

For SOT403-1 (TSSOP16) package: P<sub>tot</sub> derates linearly with 8.5 mW/K above 91 °C.

For SOT763-1 (DHVQFN16) package: P<sub>tot</sub> derates linearly with 11.2 mW/K above 106 °C.

## 8. Recommended operating conditions

Table 5. Recommended operating conditions

| Symbol              | Parameter                           | Conditions                                  | Min | Typ | Max      | Unit |
|---------------------|-------------------------------------|---|-----|-----|----------|------|
| $V_{CC}$            | supply voltage                      | [1]   | 1.0 | 3.3 | 5.5      | V    |
| $V_I$               | input voltage                       |   | 0   | -   | $V_{CC}$ | V    |
| $V_O$               | output voltage                      |   | 0   | -   | $V_{CC}$ | V    |
| $T_{amb}$           | ambient temperature                 | in free air                                 | -40 | +25 | +125     | °C   |
| $\Delta t/\Delta V$ | input transition rise and fall rate | $V_{CC} = 1.0\text{ V to }2.0\text{ V}$ [2] | -   | -   | 500      | ns/V |
|                     |                                     | $V_{CC} = 2.0\text{ V to }2.7\text{ V}$ [2] | -   | -   | 200      | ns/V |
|                     |                                     | $V_{CC} = 2.7\text{ V to }3.6\text{ V}$ [2] | -   | -   | 100      | ns/V |
|                     |                                     | $V_{CC} = 3.6\text{ V to }5.5\text{ V}$ [2] | -   | -   | 50       | ns/V |

[1] The 74LV123 is guaranteed to function down to  $V_{CC} = 1.0\text{ V}$  (input levels GND or  $V_{CC}$ ); The "Static characteristics" [Section 9](#) are guaranteed from  $V_{CC} = 1.2\text{ V}$  to  $V_{CC} = 5.5\text{ V}$ .

[2] Except for Schmitt-trigger inputs nA and nB.

## 9. Static characteristics

Table 6. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol   | Parameter                 | Conditions   | Min         | Typ[1] | Max         | Unit |
|--|---------------------------|--|-------------|--------|-------------|------|
| <b><math>T_{amb} = -40\text{ °C to }+85\text{ °C}</math></b> |                           |  |             |        |             |      |
| $V_{IH}$   | HIGH-level input voltage  | $V_{CC} = 1.2\text{ V}$                                | 0.9         | -      | -           | V    |
|  |                           | $V_{CC} = 2.0\text{ V}$                                | 1.4         | -      | -           | V    |
|  |                           | $V_{CC} = 2.7\text{ V to }3.6\text{ V}$                | 2.0         | -      | -           | V    |
|  |                           | $V_{CC} = 4.5\text{ V to }5.5\text{ V}$                | $0.7V_{CC}$ | -      | -           | V    |
| $V_{IL}$   | LOW-level input voltage   | $V_{CC} = 1.2\text{ V}$                                | -           | -      | 0.3         | V    |
|  |                           | $V_{CC} = 2.0\text{ V}$                                | -           | -      | 0.6         | V    |
|  |                           | $V_{CC} = 2.7\text{ V to }3.6\text{ V}$                | -           | -      | 0.8         | V    |
|  |                           | $V_{CC} = 4.5\text{ V to }5.5\text{ V}$                | -           | -      | $0.3V_{CC}$ | V    |
| $V_{OH}$   | HIGH-level output voltage | $V_I = V_{IH}$ or $V_{IL}$                             |             |        |             |      |
|  |                           | $I_O = -100\text{ }\mu\text{A}; V_{CC} = 1.2\text{ V}$ | -           | 1.2    | -           | V    |
|  |                           | $I_O = -100\text{ }\mu\text{A}; V_{CC} = 2.0\text{ V}$ | 1.8         | 2.0    | -           | V    |
|  |                           | $I_O = -100\text{ }\mu\text{A}; V_{CC} = 2.7\text{ V}$ | 2.5         | 2.7    | -           | V    |
|  |                           | $I_O = -100\text{ }\mu\text{A}; V_{CC} = 3.0\text{ V}$ | 2.8         | 3.0    | -           | V    |
|  |                           | $I_O = -100\text{ }\mu\text{A}; V_{CC} = 4.5\text{ V}$ | 4.3         | 4.5    | -           | V    |
|  |                           | $I_O = -6\text{ mA}; V_{CC} = 3.0\text{ V}$            | 2.40        | 2.82   | -           | V    |
| $I_O = -12\text{ mA}; V_{CC} = 4.5\text{ V}$                 | 3.60                      | 4.20   | -           | V      |             |      |

## Dual retriggerable monostable multivibrator with reset

| Symbol   | Parameter                 | Conditions   | Min                | Typ[1] | Max                | Unit |
|--|---------------------------|--|--------------------|--------|--------------------|------|
| V <sub>OL</sub>                                  | LOW-level output voltage  | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>                                    |                    |        |                    |      |
|  |                           | I <sub>O</sub> = 100 μA; V <sub>CC</sub> = 1.2 V                                       | -                  | 0      | -                  | V    |
|  |                           | I <sub>O</sub> = 100 μA; V <sub>CC</sub> = 2.0 V                                       | -                  | 0      | 0.2                | V    |
|  |                           | I <sub>O</sub> = 100 μA; V <sub>CC</sub> = 2.7 V                                       | -                  | 0      | 0.2                | V    |
|  |                           | I <sub>O</sub> = 100 μA; V <sub>CC</sub> = 3.0 V                                       | -                  | 0      | 0.2                | V    |
|  |                           | I <sub>O</sub> = 100 μA; V <sub>CC</sub> = 4.5 V                                       | -                  | 0      | 0.2                | V    |
|  |                           | I <sub>O</sub> = 6 mA; V <sub>CC</sub> = 3.0 V   | -                  | 0.25   | 0.40               | V    |
| I <sub>O</sub> = 12 mA; V <sub>CC</sub> = 4.5 V  | -                         | 0.35   | 0.55               | V      |                    |      |
| I <sub>I</sub>                                   | input leakage current     | V <sub>I</sub> = V <sub>CC</sub> or GND; V <sub>CC</sub> = 5.5 V                       | -                  | -      | 1.0                | μA   |
| I <sub>CC</sub>                                  | supply current            | V <sub>I</sub> = V <sub>CC</sub> or GND; I <sub>O</sub> = 0 A; V <sub>CC</sub> = 5.5 V | -                  | -      | 20.0               | μA   |
| ΔI <sub>CC</sub>                                 | additional supply current | V <sub>I</sub> = V <sub>CC</sub> - 0.6 V; V <sub>CC</sub> = 2.7 V to 3.6 V             | -                  | -      | 500                | μA   |
| C <sub>I</sub>                                   | input capacitance         |  | -                  | 3.5    | -                  | pF   |
| <b>T<sub>amb</sub> = -40 °C to +125 °C</b>       |                           |  |                    |        |                    |      |
| V <sub>IH</sub>                                  | HIGH-level input voltage  | V <sub>CC</sub> = 1.2 V  | 0.9                | -      | -                  | V    |
|  |                           | V <sub>CC</sub> = 2.0 V  | 1.4                | -      | -                  | V    |
|  |                           | V <sub>CC</sub> = 2.7 V to 3.6 V   | 2.0                | -      | -                  | V    |
|  |                           | V <sub>CC</sub> = 4.5 V to 5.5 V   | 0.7V <sub>CC</sub> | -      | -                  | V    |
| V <sub>IL</sub>                                  | LOW-level input voltage   | V <sub>CC</sub> = 1.2 V  | -                  | -      | 0.3                | V    |
|  |                           | V <sub>CC</sub> = 2.0 V  | -                  | -      | 0.6                | V    |
|  |                           | V <sub>CC</sub> = 2.7 V to 3.6 V   | -                  | -      | 0.8                | V    |
|  |                           | V <sub>CC</sub> = 4.5 V to 5.5 V   | -                  | -      | 0.3V <sub>CC</sub> | V    |
| V <sub>OH</sub>                                  | HIGH-level output voltage | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>                                    |                    |        |                    |      |
|  |                           | I <sub>O</sub> = -100 μA; V <sub>CC</sub> = 1.2 V                                      | -                  | -      | -                  | V    |
|  |                           | I <sub>O</sub> = -100 μA; V <sub>CC</sub> = 2.0 V                                      | 1.8                | -      | -                  | V    |
|  |                           | I <sub>O</sub> = -100 μA; V <sub>CC</sub> = 2.7 V                                      | 2.5                | -      | -                  | V    |
|  |                           | I <sub>O</sub> = -100 μA; V <sub>CC</sub> = 3.0 V                                      | 2.8                | -      | -                  | V    |
|  |                           | I <sub>O</sub> = -100 μA; V <sub>CC</sub> = 4.5 V                                      | 4.3                | -      | -                  | V    |
|  |                           | I <sub>O</sub> = -6 mA; V <sub>CC</sub> = 3.0 V  | 2.2                | -      | -                  | V    |
| I <sub>O</sub> = -12 mA; V <sub>CC</sub> = 4.5 V | 3.5                       | -  | -                  | V      |                    |      |
| V <sub>OL</sub>                                  | LOW-level output voltage  | V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>                                    |                    |        |                    |      |
|  |                           | I <sub>O</sub> = 100 μA; V <sub>CC</sub> = 1.2 V                                       | -                  | -      | -                  | V    |
|  |                           | I <sub>O</sub> = 100 μA; V <sub>CC</sub> = 2.0 V                                       | -                  | -      | 0.2                | V    |
|  |                           | I <sub>O</sub> = 100 μA; V <sub>CC</sub> = 2.7 V                                       | -                  | -      | 0.2                | V    |
|  |                           | I <sub>O</sub> = 100 μA; V <sub>CC</sub> = 3.0 V                                       | -                  | -      | 0.2                | V    |
|  |                           | I <sub>O</sub> = 100 μA; V <sub>CC</sub> = 4.5 V                                       | -                  | -      | 0.2                | V    |
|  |                           | I <sub>O</sub> = 6 mA; V <sub>CC</sub> = 3.0 V   | -                  | -      | 0.5                | V    |
| I <sub>O</sub> = 12 mA; V <sub>CC</sub> = 4.5 V  | -                         | -  | 0.65               | V      |                    |      |
| I <sub>I</sub>                                   | input leakage current     | V <sub>I</sub> = V <sub>CC</sub> or GND; V <sub>CC</sub> = 5.5 V                       | -                  | -      | 1.0                | μA   |
| I <sub>CC</sub>                                  | supply current            | V <sub>I</sub> = V <sub>CC</sub> or GND; I <sub>O</sub> = 0 A; V <sub>CC</sub> = 5.5 V | -                  | -      | 160                | μA   |
| ΔI <sub>CC</sub>                                 | additional supply current | V <sub>I</sub> = V <sub>CC</sub> - 0.6 V; V <sub>CC</sub> = 2.7 V to 3.6 V             | -                  | -      | 850                | μA   |

[1] All typical values are measured at T<sub>amb</sub> = 25 °C.

## 10. Dynamic characteristics

**Table 7. Dynamic characteristics**

$GND = 0\text{ V}$ ;  $t_r = t_f \leq 2.5\text{ ns}$ ; for test circuit see [Fig. 6](#).

| Symbol   | Parameter         | Conditions                              | -40 °C to +85 °C |        |     | -40 °C to +125 °C |     | Unit |
|--|-------------------|---|------------------|--------|-----|-------------------|-----|------|
|  |                   |   | Min              | Typ[1] | Max | Min               | Max |      |
| <b>Propagation delay; see <a href="#">Fig. 5</a></b>     |                   |   |                  |        |     |                   |     |      |
| $t_{pd}$   | propagation delay | nRD, nA and nB to nQ [2]                |                  |        |     |                   |     |      |
|  |                   | $V_{CC} = 1.2\text{ V}$                 | -                | 120    | -   | -                 | -   | ns   |
|  |                   | $V_{CC} = 2.0\text{ V}$                 | -                | 40     | 76  | -                 | 92  | ns   |
|  |                   | $V_{CC} = 2.7\text{ V}$                 | -                | 30     | 56  | -                 | 68  | ns   |
|  |                   | $V_{CC} = 3.0\text{ V to }3.6\text{ V}$ | -                | 25     | 48  | -                 | 57  | ns   |
|  |                   | $V_{CC} = 4.5\text{ V to }5.5\text{ V}$ | -                | 18     | 40  | -                 | 46  | ns   |
|  |                   | nRD to nQ (reset) [2]                   |                  |        |     |                   |     |      |
|  |                   | $V_{CC} = 1.2\text{ V}$                 | -                | 100    | -   | -                 | -   | ns   |
|  |                   | $V_{CC} = 2.0\text{ V}$                 | -                | 30     | 57  | -                 | 68  | ns   |
|  |                   | $V_{CC} = 2.7\text{ V}$                 | -                | 23     | 43  | -                 | 51  | ns   |
|  |                   | $V_{CC} = 3.0\text{ V to }3.6\text{ V}$ | -                | 20     | 38  | -                 | 45  | ns   |
| $V_{CC} = 4.5\text{ V to }5.5\text{ V}$                  | -                 | 14                                      | 31               | -      | 36  | ns                |     |      |
| <b>Inputs nA, nB and nRD; see <a href="#">Fig. 5</a></b> |                   |   |                  |        |     |                   |     |      |
| $t_w$  | pulse width       | nA = LOW                                |                  |        |     |                   |     |      |
|  |                   | $V_{CC} = 2.0\text{ V}$                 | 30               | 5      | -   | 40                | -   | ns   |
|  |                   | $V_{CC} = 2.7\text{ V}$                 | 25               | 3.5    | -   | 30                | -   | ns   |
|  |                   | $V_{CC} = 3.0\text{ V to }3.6\text{ V}$ | 20               | 3.0    | -   | 25                | -   | ns   |
|  |                   | $V_{CC} = 4.5\text{ V to }5.5\text{ V}$ | 15               | 2.5    | -   | 20                | -   | ns   |
|  |                   | nB = HIGH                               |                  |        |     |                   |     |      |
|  |                   | $V_{CC} = 2.0\text{ V}$                 | 30               | 13     | -   | 40                | -   | ns   |
|  |                   | $V_{CC} = 2.7\text{ V}$                 | 25               | 8      | -   | 30                | -   | ns   |
|  |                   | $V_{CC} = 3.0\text{ V to }3.6\text{ V}$ | 20               | 7      | -   | 25                | -   | ns   |
|  |                   | $V_{CC} = 4.5\text{ V to }5.5\text{ V}$ | 15               | 5      | -   | 20                | -   | ns   |
|  |                   | nRD = LOW; see <a href="#">Fig. 11</a>  |                  |        |     |                   |     |      |
|  |                   | $V_{CC} = 2.0\text{ V}$                 | 35               | 6      | -   | 45                | -   | ns   |
|  |                   | $V_{CC} = 2.7\text{ V}$                 | 30               | 5      | -   | 40                | -   | ns   |
|  |                   | $V_{CC} = 3.0\text{ V to }3.6\text{ V}$ | 25               | 4      | -   | 30                | -   | ns   |
| $V_{CC} = 4.5\text{ V to }5.5\text{ V}$                  | 20                | 3                                       | -                | 25     | -   | ns                |     |      |
| $t_{trig}$   | retrigger time    | nB to nA; see <a href="#">Fig. 10</a>   |                  |        |     |                   |     |      |
|  |                   | $V_{CC} = 2.0\text{ V}$                 | -                | 70     | -   | -                 | -   | ns   |
|  |                   | $V_{CC} = 2.7\text{ V}$                 | -                | 55     | -   | -                 | -   | ns   |
|  |                   | $V_{CC} = 3.0\text{ V to }3.6\text{ V}$ | -                | 45     | -   | -                 | -   | ns   |
|  |                   | $V_{CC} = 4.5\text{ V to }5.5\text{ V}$ | -                | 40     | -   | -                 | -   | ns   |



## Dual retriggerable monostable multivibrator with reset

| Symbol   | Parameter                     | Conditions  | -40 °C to +85 °C |        |      | -40 °C to +125 °C |     | Unit          |
|--|-------------------------------|---|------------------|--------|------|-------------------|-----|---------------|
|  |                               |   | Min              | Typ[1] | Max  | Min               | Max |               |
| <b>Outputs; <math>n\bar{Q}</math> = LOW and <math>nQ</math> = HIGH, see Fig. 5</b> |                               |   |                  |        |      |                   |     |               |
| $t_W$  | pulse width                   | $C_{EXT} = 100 \text{ nF}; R_{EXT} = 10 \text{ k}\Omega$  |                  |        |      |                   |     |               |
|  |                               | $V_{CC} = 2.0 \text{ V}$                                  | -                | 470    | -    | -                 | -   | $\mu\text{s}$ |
|  |                               | $V_{CC} = 2.7 \text{ V}$                                  | -                | 460    | -    | -                 | -   | $\mu\text{s}$ |
|  |                               | $V_{CC} = 3.0 \text{ V to } 3.6 \text{ V}$                | -                | 450    | -    | -                 | -   | $\mu\text{s}$ |
|  |                               | $V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$                | -                | 430    | -    | -                 | -   | $\mu\text{s}$ |
|  |                               | $C_{EXT} = 0 \text{ pF}; R_{EXT} = 5 \text{ k}\Omega$     |                  |        |      |                   |     |               |
|  |                               | $V_{CC} = 2.0 \text{ V}$                                  | -                | 100    | -    | -                 | -   | ns            |
|  |                               | $V_{CC} = 2.7 \text{ V}$                                  | -                | 90     | -    | -                 | -   | ns            |
|  |                               | $V_{CC} = 3.0 \text{ V to } 3.6 \text{ V}$                | -                | 80     | -    | -                 | -   | ns            |
| $V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$   | -                             | 70  | -                | -      | -    | ns                |     |               |
| <b>External components</b>   |                               |   |                  |        |      |                   |     |               |
| $R_{EXT}$  | external resistance           | see Fig. 9 [3]  |                  |        |      |                   |     |               |
|  |                               | $V_{CC} = 1.2 \text{ V}$                                  | 10               | -      | 1000 | -                 | -   | k $\Omega$    |
|  |                               | $V_{CC} = 2.0 \text{ V}$                                  | 5                | -      | 1000 | -                 | -   | k $\Omega$    |
|  |                               | $V_{CC} = 2.7 \text{ V}$                                  | 3                | -      | 1000 | -                 | -   | k $\Omega$    |
|  |                               | $V_{CC} = 3.0 \text{ V to } 3.6 \text{ V}$                | 2                | -      | 1000 | -                 | -   | k $\Omega$    |
|  |                               | $V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$                | 2                | -      | 1000 | -                 | -   | k $\Omega$    |
| $C_{EXT}$  | external capacitance          | see Fig. 9 [3] [4]  |                  |        |      |                   |     |               |
|  |                               | $V_{CC} = 1.2 \text{ V}$                                  | -                | -      | -    | -                 | -   | pF            |
|  |                               | $V_{CC} = 2.0 \text{ V}$                                  | -                | -      | -    | -                 | -   | pF            |
|  |                               | $V_{CC} = 2.7 \text{ V}$                                  | -                | -      | -    | -                 | -   | pF            |
|  |                               | $V_{CC} = 3.0 \text{ V to } 3.6 \text{ V}$                | -                | -      | -    | -                 | -   | pF            |
|  |                               | $V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$                | -                | -      | -    | -                 | -   | pF            |
| <b>Dynamic power dissipation</b>   |                               |   |                  |        |      |                   |     |               |
| $C_{PD}$   | power dissipation capacitance | $V_{CC} = 3.3 \text{ V}; V_I = \text{GND to } V_{CC}$ [5] | -                | 60     | -    | -                 | -   | pF            |

[1] All typical values are measured at  $T_{amb} = 25 \text{ }^\circ\text{C}$  and nominal supply values ( $V_{CC} = 3.3 \text{ V}$  and  $5.0 \text{ V}$ ).

[2]  $t_{pd}$  is the same as  $t_{PLH}$  and  $t_{PHL}$ ;  $C_{EXT} = 0 \text{ pF}$ ;  $R_{EXT} = 5 \text{ k}\Omega$ .

[3] For other  $R_{EXT}$  and  $C_{EXT}$  combinations see Fig. 9 and Section 11.1.1.

[4]  $C_{EXT}$  has no limits.

[5]  $C_{PD}$  is used to determine the dynamic power dissipation ( $P_D$  in  $\mu\text{W}$ ).

$$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o) \text{ where:}$$

$f_i$  = input frequency in MHz;

$f_o$  = output frequency in MHz;

$C_L$  = output load capacitance in pF;

$V_{CC}$  = supply voltage in V;

$N$  = number of inputs switching;

$\Sigma(C_L \times V_{CC}^2 \times f_o)$  = sum of the outputs.

10.1. Waveforms and test circuit

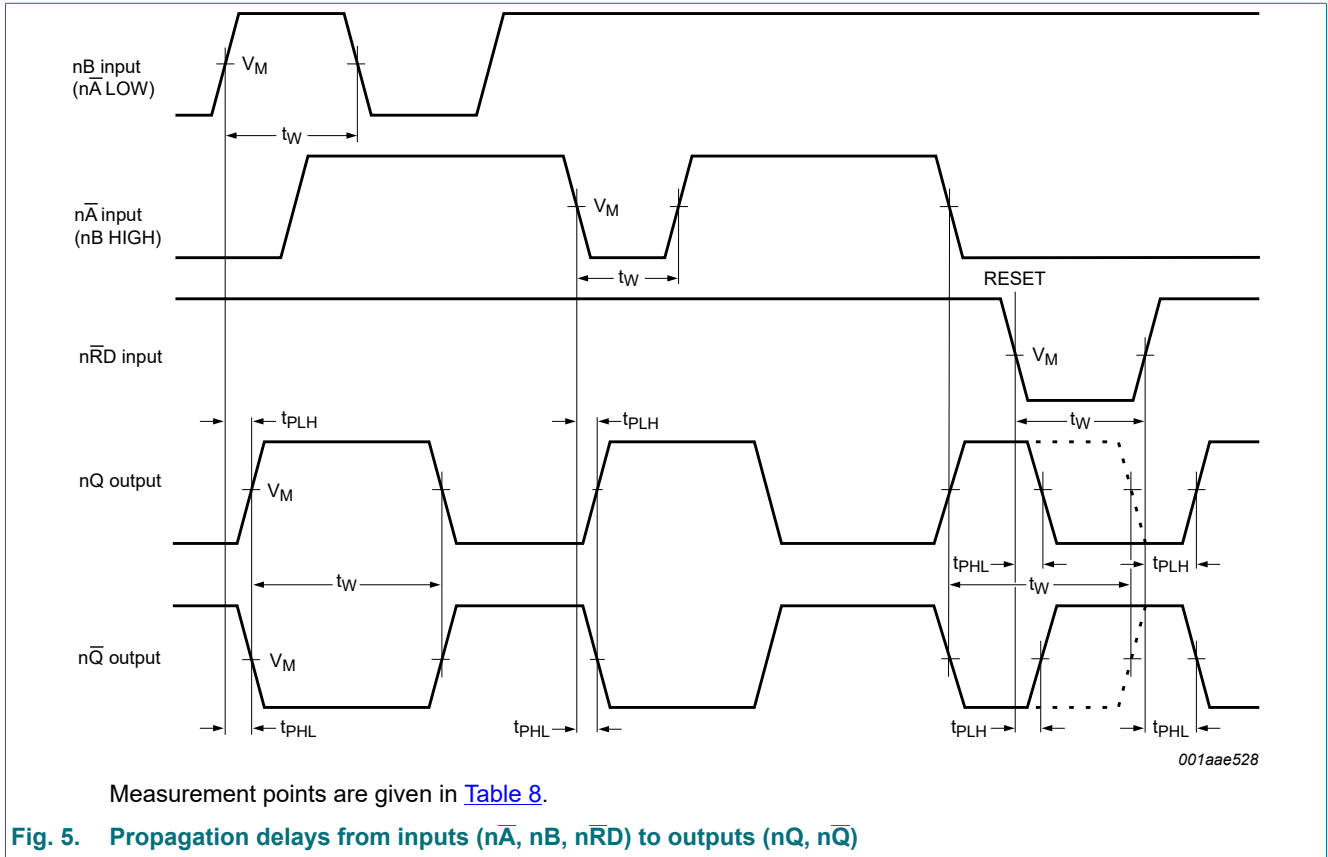


Table 8. Measurement points

| $V_{CC}$            | $V_M$               |
|---------------------|---------------------|
| $\geq 2.7\text{ V}$ | 1.5 V               |
| $< 2.7\text{ V}$    | $0.5 \times V_{CC}$ |

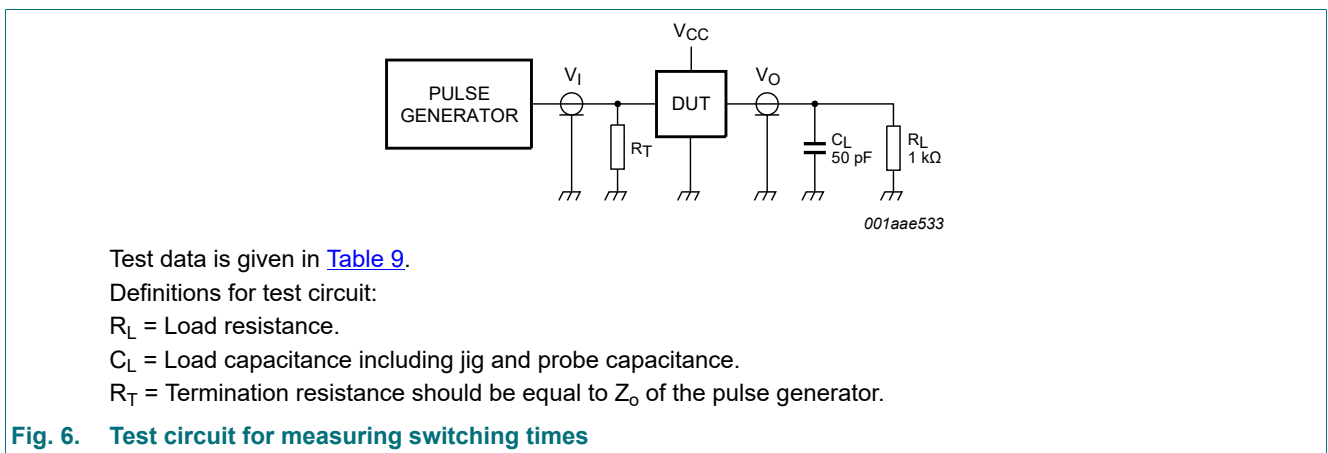


Table 9. Test data

| Supply voltage | Input    |               | Load  |              | Test               |
|----------------|----------|---------------|-------|--------------|--------------------|
| $V_{CC}$       | $V_I$    | $t_r, t_f$    | $C_L$ | $R_L$        |                    |
| < 2.7 V        | $V_{CC}$ | $\leq 2.5$ ns | 50 pF | 1 k $\Omega$ | $t_{PHL}, t_{PLH}$ |
| 2.7 V to 3.6 V | 2.7 V    | $\leq 2.5$ ns | 50 pF | 1 k $\Omega$ | $t_{PHL}, t_{PLH}$ |
| $\geq 4.5$ V   | $V_{CC}$ | $\leq 2.5$ ns | 50 pF | 1 k $\Omega$ | $t_{PHL}, t_{PLH}$ |

## 11. Application information

### 11.1. Timing components

#### 11.1.1. Basic timing

The basic output pulse width is essentially determined by the values of the external timing components  $R_{EXT}$  and  $C_{EXT}$ .



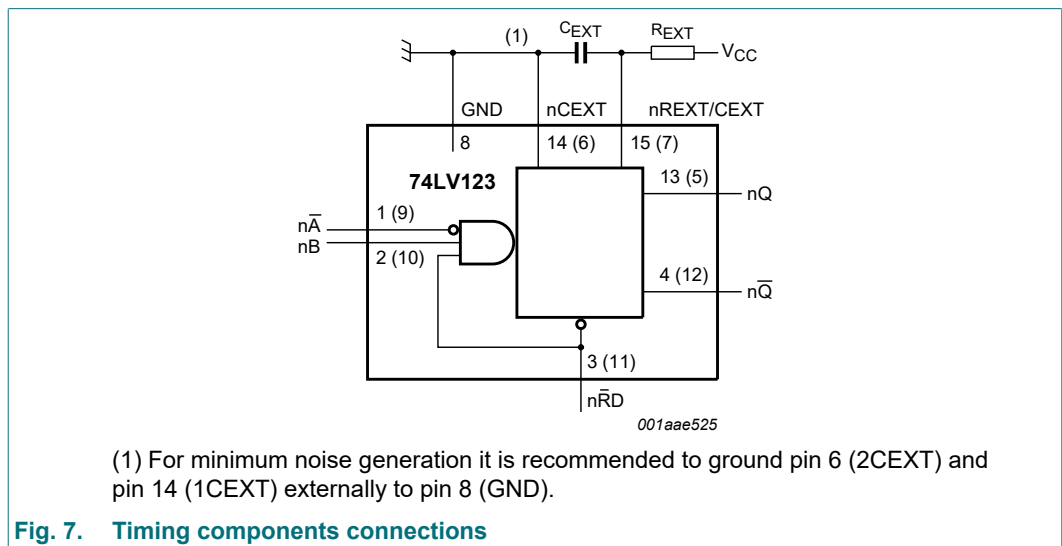


Fig. 7. Timing components connections

If  $C_{EXT} > 10$  nF, the following formula is valid:  $t_W = K \times R_{EXT} \times C_{EXT}$  (typical) where:

- $t_W$  = output pulse width in ns
- $R_{EXT}$  = external resistor in k $\Omega$
- $C_{EXT}$  = external capacitor in pF
- $K$  = constant: this is 0.45 for  $V_{CC} = 5.0$  V and 0.48 for  $V_{CC} = 2.0$  V (see Fig. 8)

The inherent test jig and pin capacitance at pin 15 and pin 7 (nREXT/CEXT) is approximately 7 pF.

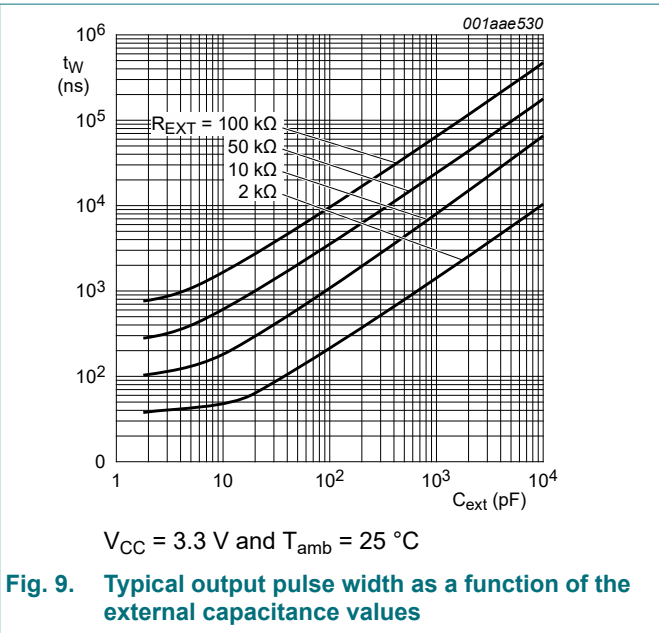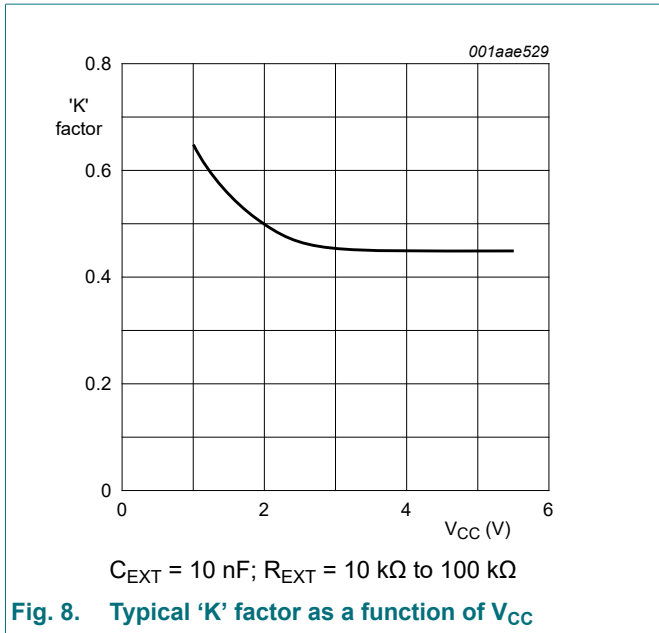

**11.1.2. Retrigger timing**


The time to retrigger the monostable multivibrator depends on the values of  $R_{EXT}$  and  $C_{EXT}$ . The output pulse width will only be extended when the time between the active going edges of the trigger pulses meets the minimum retrigger time. If  $C_{EXT} > 10 \text{ pF}$ , the next formula for the set-up time of a retrigger pulse is valid:

at  $V_{CC} = 5.0 \text{ V}$ :  $t_{trig} = 30 + 0.19R_{EXT} \times C_{EXT}^{0.9} + 13 \times R_{EXT}^{1.05}$  (typical)

at  $V_{CC} = 3.0 \text{ V}$ :  $t_{trig} = 41 + 0.15R_{EXT} \times C_{EXT}^{0.9} \times 1 \times R_{EXT}$  (typical)

where:

- $t_{trig}$  = retrigger time in ns
- $C_{EXT}$  = external capacitor in pF
- $R_{EXT}$  = external resistor in k $\Omega$

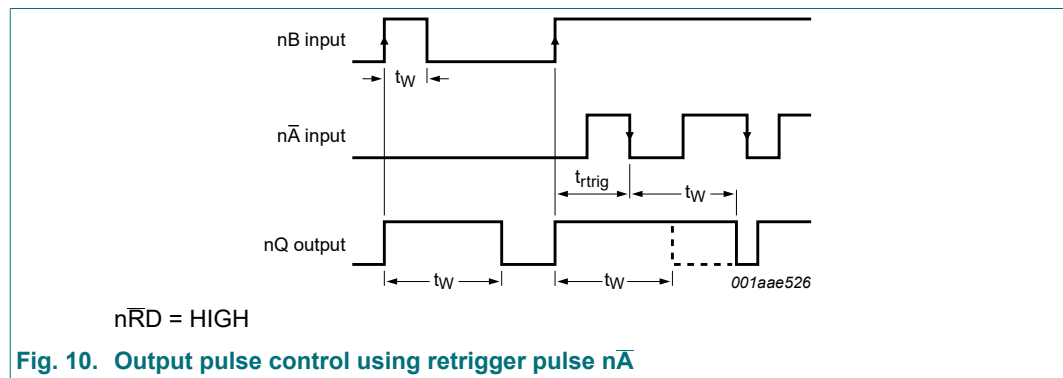

### 11.1.3. Reset timing

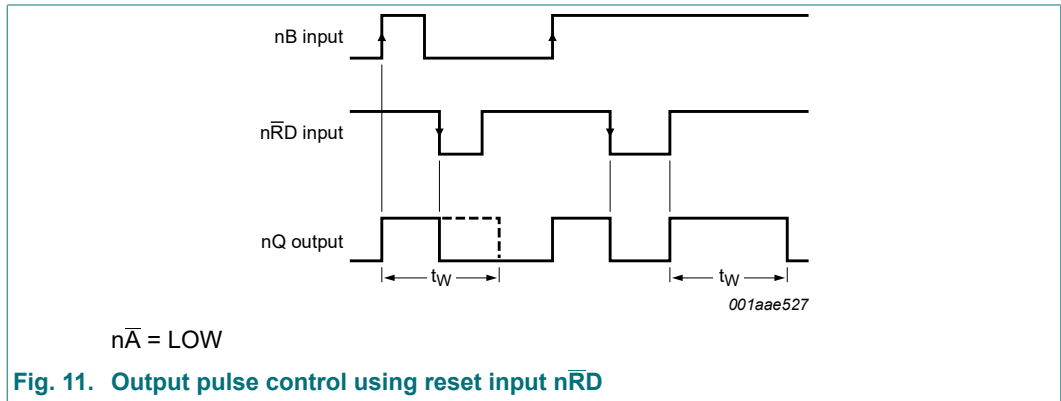


Fig. 11. Output pulse control using reset input  $n\bar{RD}$

## 11.2. Power considerations

### 11.2.1. Power-up

When the monostable multivibrator is powered-up, it may produce an output pulse with a pulse width defined by the values of  $R_{EXT}$  and  $C_{EXT}$ . This output pulse can be eliminated using the RC circuit on pin  $n\bar{RD}$  shown in Fig. 12.

### 11.2.2. Power-down

A large capacitor ( $C_{EXT}$ ) may cause problems when powering-down the monostable due to the energy stored in this capacitor. When a system containing this device is powered-down or a rapid decrease of  $V_{CC}$  to zero occurs, the monostable may sustain damage, due to the capacitor discharging through the input protection diodes. To avoid this possibility, connect a damping diode  $D_{EXT}$  (preferably a germanium or Schottky type diode) able to withstand large current surges. See Fig. 12.

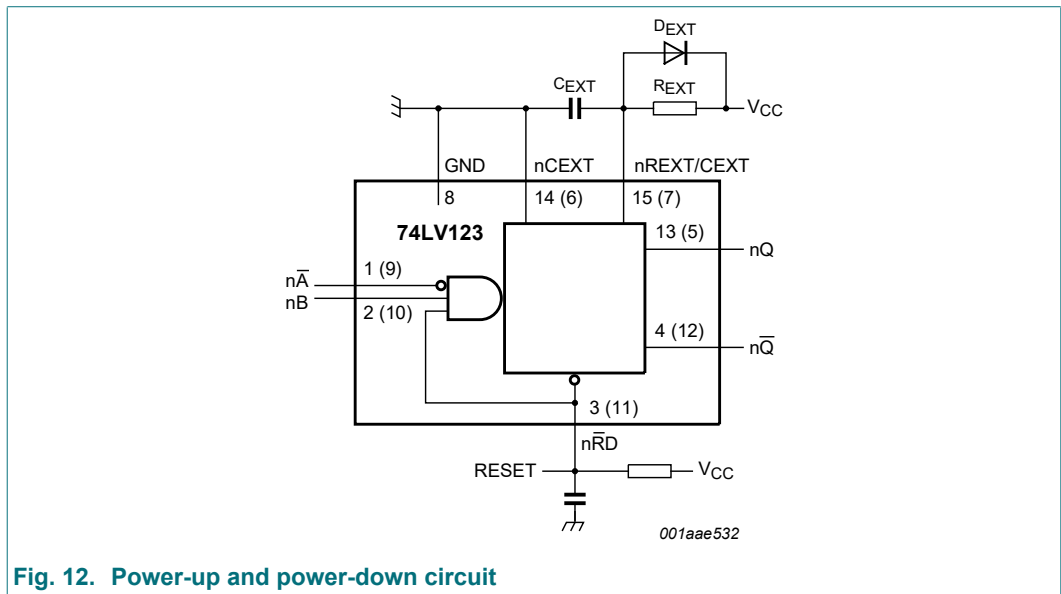


Fig. 12. Power-up and power-down circuit

## 12. Package outline

SO16: plastic small outline package; 16 leads; body width 3.9 mm

SOT109-1

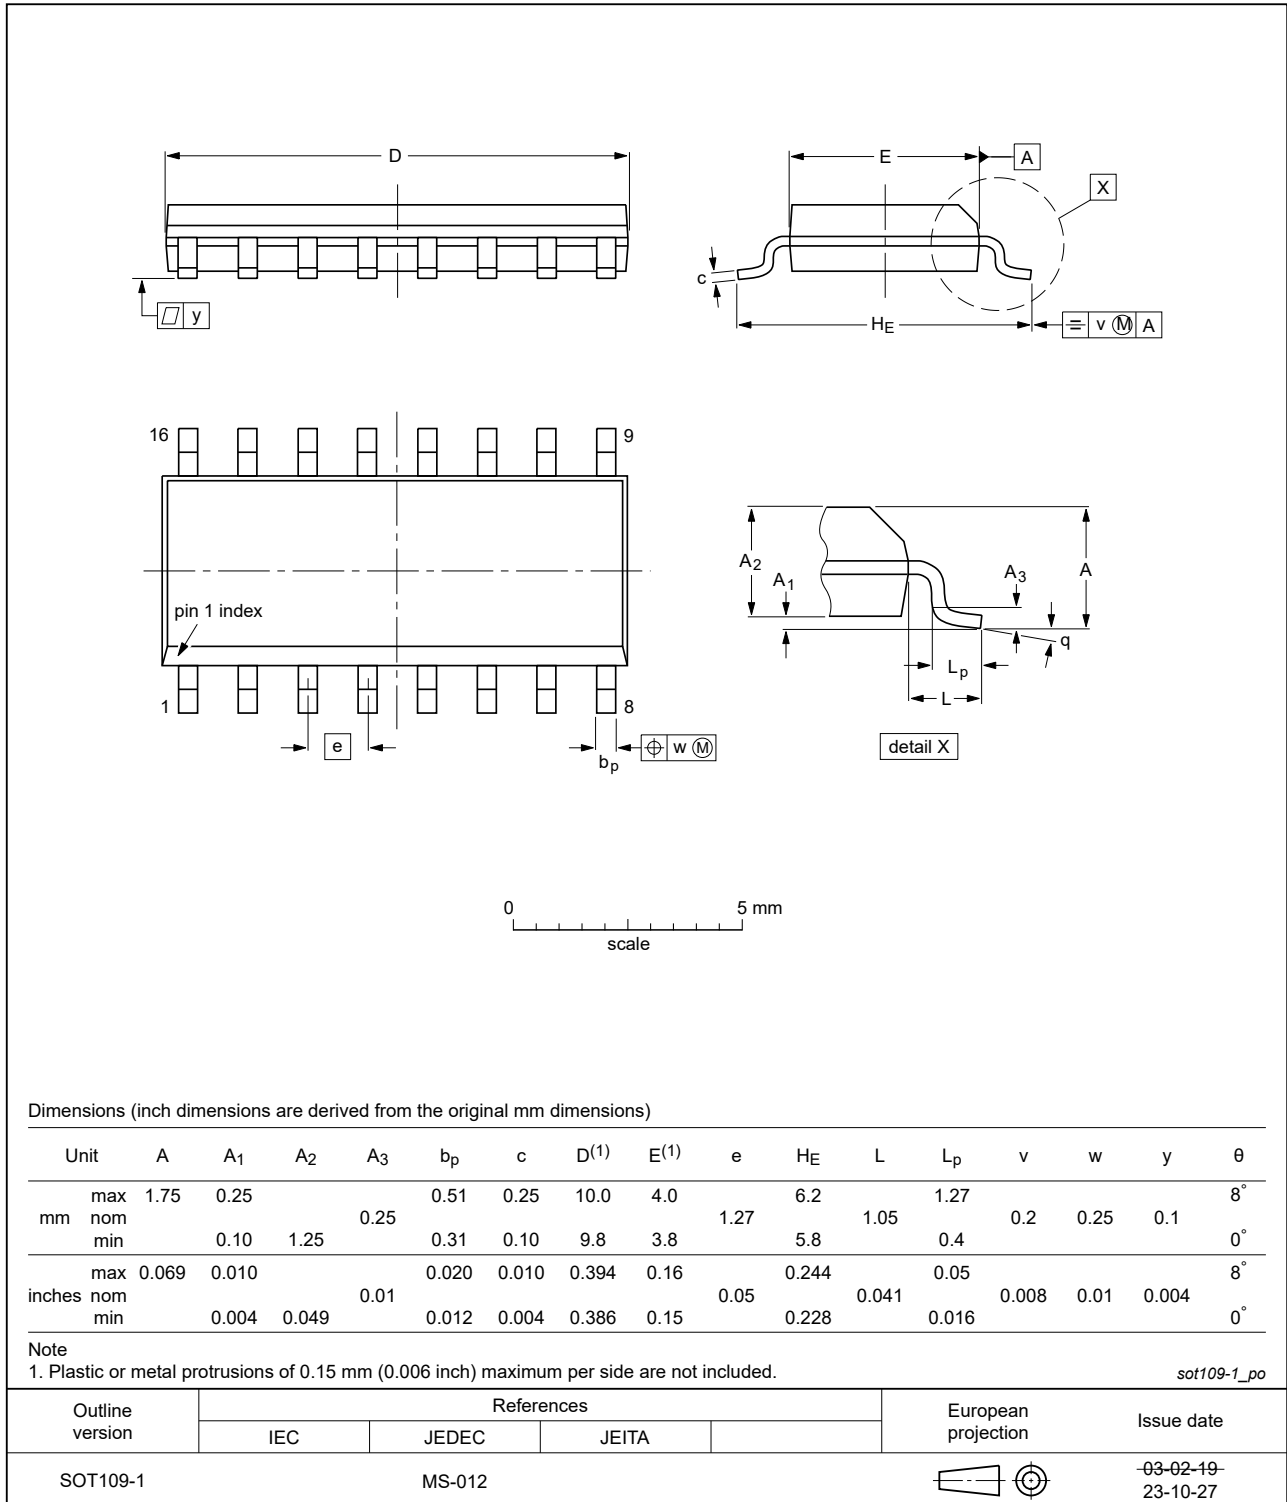


Fig. 13. Package outline SOT109-1 (SO16)

TSSOP16: plastic thin shrink small outline package; 16 leads; body width 4.4 mm

SOT403-1

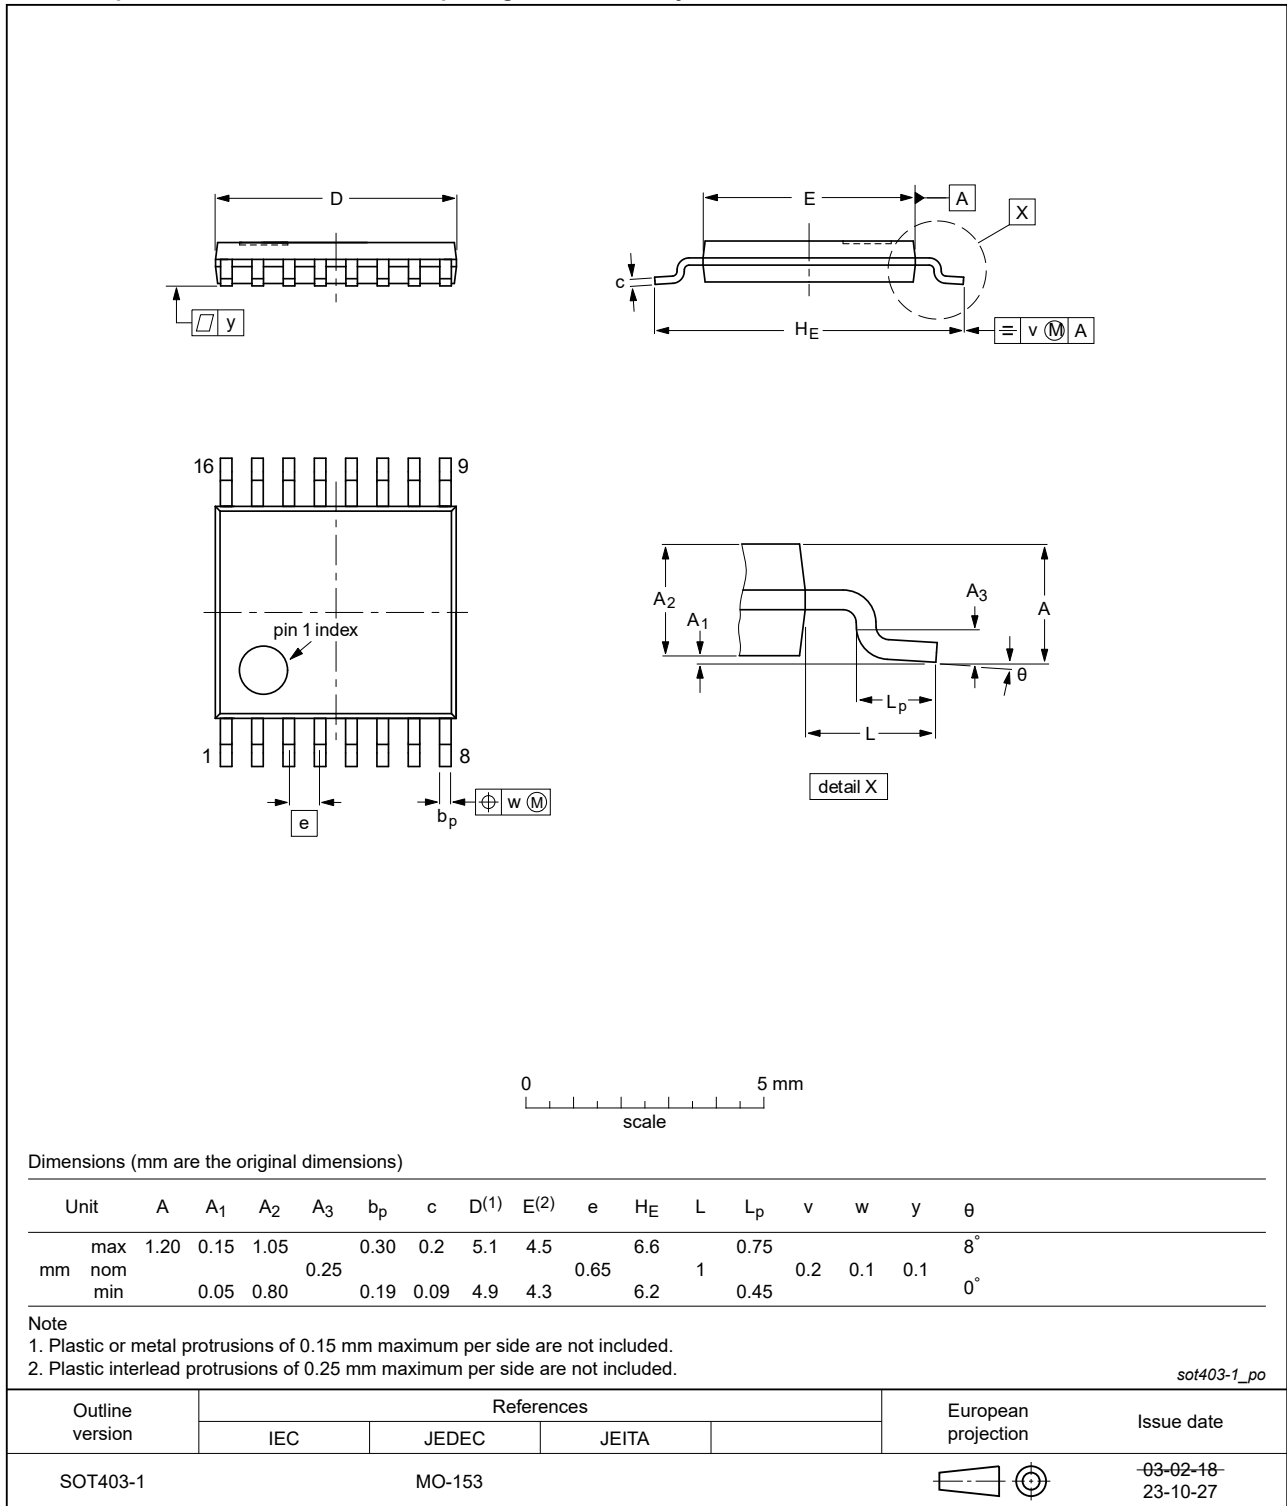


Fig. 14. Package outline SOT403-1 (TSSOP16)

DHVQFN16: plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads; 16 terminals; body 2.5 x 3.5 x 0.85 mm

SOT763-1



Fig. 15. Package outline SOT763-1 (DHVQFN16)



## 13. Abbreviations

Table 10. Abbreviations

| Acronym | Description                             |
|---------|---|
| CDM     | Charged Device Model                    |
| CMOS    | Complementary Metal Oxide Semiconductor |
| DUT     | Device Under Test                       |
| ESD     | ElectroStatic Discharge                 |
| HBM     | Human Body Model                        |
| TTL     | Transistor-Transistor Logic             |

## 14. Revision history

Table 11. Revision history

| Document ID    | Release date  | Data sheet status     | Change notice | Supersedes   |
|----------------|---|-----------------------|---------------|--------------|
| 74LV123 v.11   | 20240115  | Product data sheet    | -             | 74LV123 v.10 |
| Modifications: | <ul style="list-style-type: none"> <li>• <a href="#">Section 2</a>: ESD specification updated according to the latest JEDEC standard.</li> <li>• <a href="#">Fig. 13</a> and <a href="#">Fig. 14</a>: Aligned SO and TSSOP package outline drawings to JEDEC MS-012 and MO-153</li> </ul>   |                       |               |              |
| 74LV123 v.10   | 20230714  | Product data sheet    | -             | 74LV123 v.9  |
| Modifications: | <ul style="list-style-type: none"> <li>• <a href="#">Section 10</a> updated (Errata).</li> </ul>  |                       |               |              |
| 74LV123 v.9    | 20210913  | Product data sheet    | -             | 74LV123 v.8  |
| Modifications: | <ul style="list-style-type: none"> <li>• The format of this data sheet has been redesigned to comply with the identity guidelines of Nexperia.</li> <li>• Legal texts have been adapted to the new company name where appropriate.</li> <li>• Type number 74LV123DB (SOT338-1/SSOP16) removed.</li> <li>• <a href="#">Section 1</a> and <a href="#">Section 2</a> updated.</li> <li>• <a href="#">Section 7</a>: Derating values for <math>P_{tot}</math> total power dissipation have been updated.</li> </ul> |                       |               |              |
| 74LV123 v.8    | 20160304  | Product data sheet    | -             | 74LV123 v.7  |
| Modifications: | <ul style="list-style-type: none"> <li>• Type numbers 74LV123N (SOT38-4) removed.</li> </ul>  |                       |               |              |
| 74LV123 v.7    | 20111212  | Product data sheet    | -             | 74LV123 v.6  |
| Modifications: | <ul style="list-style-type: none"> <li>• Legal pages updated.</li> </ul>  |                       |               |              |
| 74LV123 v.6    | 20110826  | Product data sheet    | -             | 74LV123 v.5  |
| 74LV123 v.5    | 20071108  | Product data sheet    | -             | 74LV123 v.4  |
| 74LV123 v.4    | 20070919  | Product specification | -             | 74LV123 v.3  |
| 74LV123 v.3    | 20030313  | Product specification | -             | 74LV123 v.2  |
| 74LV123 v.2    | 19980420  | Product specification | -             | 74LV123 v.1  |
| 74LV123 v.1    | 19970204  | Product specification | -             | -            |

## 15. Legal information

### Data sheet status

| Document status [1][2]         | Product status [3] | Definition  |
|--------------------------------|--------------------|---|
| Objective [short] data sheet   | Development        | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet | Qualification      | This document contains data from the preliminary specification.                       |
| Product [short] data sheet     | Production         | This document contains the product specification.                                     |

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <https://www.nexperia.com>.

### Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

**Right to make changes** — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal

injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nexperia.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Non-automotive qualified products** — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

### Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## Contents

---

|  |           |
|--|-----------|
| <b>1. General description</b> .....              | <b>1</b>  |
| <b>2. Features and benefits</b> .....            | <b>1</b>  |
| <b>3. Ordering information</b> .....             | <b>1</b>  |
| <b>4. Functional diagram</b> .....               | <b>2</b>  |
| <b>5. Pinning information</b> .....              | <b>4</b>  |
| 5.1. Pinning.....                                | 4         |
| 5.2. Pin description.....                        | 4         |
| <b>6. Functional description</b> .....           | <b>5</b>  |
| <b>7. Limiting values</b> .....                  | <b>5</b>  |
| <b>8. Recommended operating conditions</b> ..... | <b>6</b>  |
| <b>9. Static characteristics</b> .....           | <b>6</b>  |
| <b>10. Dynamic characteristics</b> .....         | <b>8</b>  |
| 10.1. Waveforms and test circuit.....            | 10        |
| <b>11. Application information</b> .....         | <b>11</b> |
| 11.1. Timing components.....                     | 11        |
| 11.1.1. Basic timing.....                        | 11        |
| 11.1.2. Retrigger timing.....                    | 12        |
| 11.1.3. Reset timing.....                        | 13        |
| 11.2. Power considerations.....                  | 13        |
| 11.2.1. Power-up.....                            | 13        |
| 11.2.2. Power-down.....                          | 13        |
| <b>12. Package outline</b> .....                 | <b>14</b> |
| <b>13. Abbreviations</b> .....                   | <b>17</b> |
| <b>14. Revision history</b> .....                | <b>17</b> |
| <b>15. Legal information</b> .....               | <b>18</b> |

---

© Nexperia B.V. 2024. All rights reserved

For more information, please visit: <http://www.nexperia.com>  
 For sales office addresses, please send an email to: [salesaddresses@nexperia.com](mailto:salesaddresses@nexperia.com)  
 Date of release: 15 January 2024

---