

# BL series

Miniature paddle joystick controllers •  
non-contacting Hall effect technology



## DISTINCTIVE FEATURES

- Hall effect and switch function
- Custom levers available in 5 colors
- Analog or PWM outputs
- 5V operation with standard dual redundant outputs
- Sealed up to IP67



## ENVIRONMENTAL SPECIFICATIONS

- Operating Temperature: -25°C to +70°C
- Storage Temperature: -40°C to +85°C
- Above Panel Sealing: IP67
- EMC Immunity Level: EN61000-6-2: 2005
- EMC Emissions Level: EN61000-6-4: 2011, CISPR 25: 2008 Ed. 3.0
- ESD: EN61000-4-2



## ELECTRICAL SPECIFICATIONS

- Maximum Voltage: 5V  $\pm$ 0.5V Transient free
- Recommended load: 10K  $\Omega$  Minimum
- Return to Center Voltage Tolerance:  $V/2 \pm$  (5% x Gain)



## MECHANICAL SPECIFICATIONS

- Mechanical Angle of Movement: 60°
- Expected Mechanical Life: 10 million lifecycles
- Mass/weight: 50g (1.76oz.)
- Lever Action (centering): Spring



## MATERIALS

- Body: PA
- Actuator: PA & PC
- Rubber Grip: TPE

The company reserves the right to change specifications without notice.




# BL series

Miniature paddle joystick controllers • non-contacting Hall effect technology




## PANEL CUT-OUT

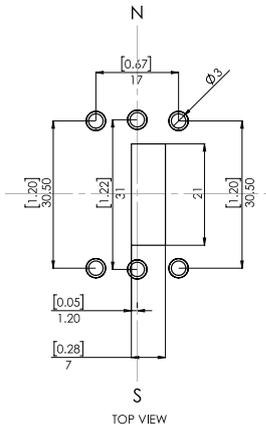

## CONNECTIONS

Paddles are supplied with an eight way connector as standard.

PIN	FUNCTION
1	5V
2	Blank
3	0V
4	Analog/PWM output 1
5	Analog/PWM output 2
6	0V
7	Blank

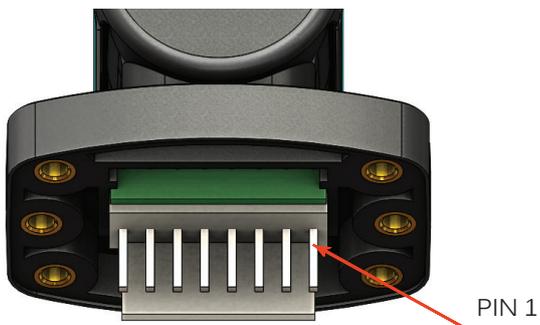

## MOUNTING



- The Paddle may be mounted with two different hole patterns:

- Two screws – in line on the Y axis (shown as yellow screws)
- Four screws – one in each corner (shown as silver screws)

- The Paddle is fitted with M3 bushes in all six positions, as standard.


- Fasteners are not supplied as standard. The appropriate length of fastener is dependent on panel thickness.

Miniature paddle joystick controllers • non-contacting Hall effect technology




## OUTPUT SPECIFICATIONS

40% GAIN INVERSE

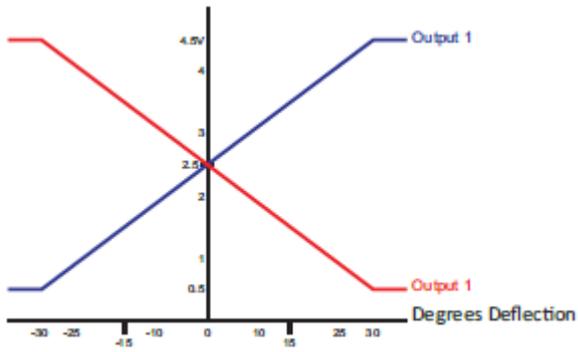

40% GAIN

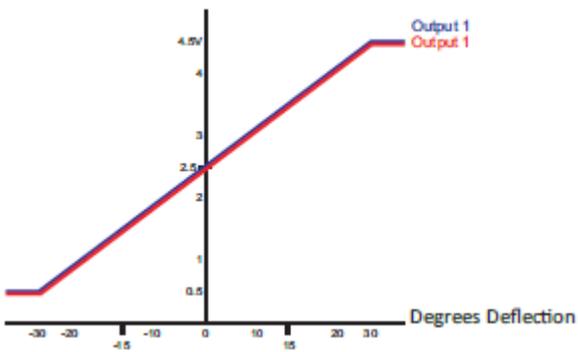

# BL series

Miniature paddle joystick controllers •  
non-contacting Hall effect technology



## BUILD YOUR PART NUMBER

**BL**

### SERIES

**BL**

48mm (1.91in)  
BK Black above  
the panel

### CONFIGURATION

- |          |                       |
|----------|-----------------------|
| <b>1</b> | Standard Dual Outputs |
| <b>2</b> | Inverse Dual Outputs  |
| <b>3</b> | PWM                   |

### GAIN

- |           |        |
|-----------|--------|
| <b>10</b> | ±10%xV |
| <b>25</b> | ±25%xV |
| <b>30</b> | ±30%xV |
| <b>40</b> | ±40%xV |
| <b>50</b> | ±50%xV |

### LEVER OPERATION

**A01** Spring to Center

### HANDLE

**BK** Black

### DETAIL COLOR

- |           |        |
|-----------|--------|
| <b>BK</b> | Black  |
| <b>RE</b> | Red    |
| <b>BL</b> | Blue   |
| <b>YE</b> | Yellow |
| <b>GR</b> | Green  |


**00** No Switches

### MODIFIER

**00** None


Miniature paddle joystick controllers • non-contacting Hall effect technology

## DIMENSIONS


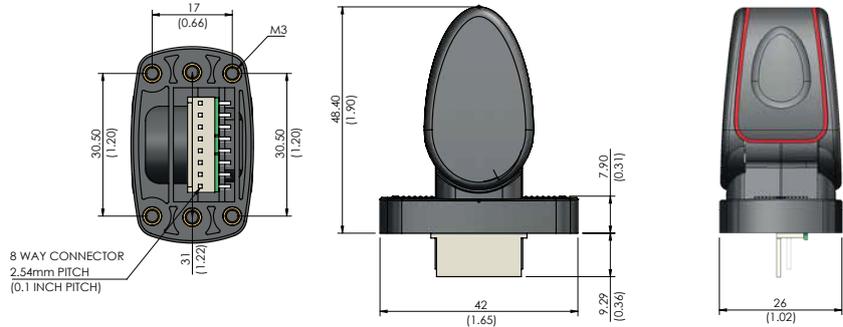


## VOLTAGE OUTPUT OPTIONS

### DUAL OUTPUT CONFIGURATION 1

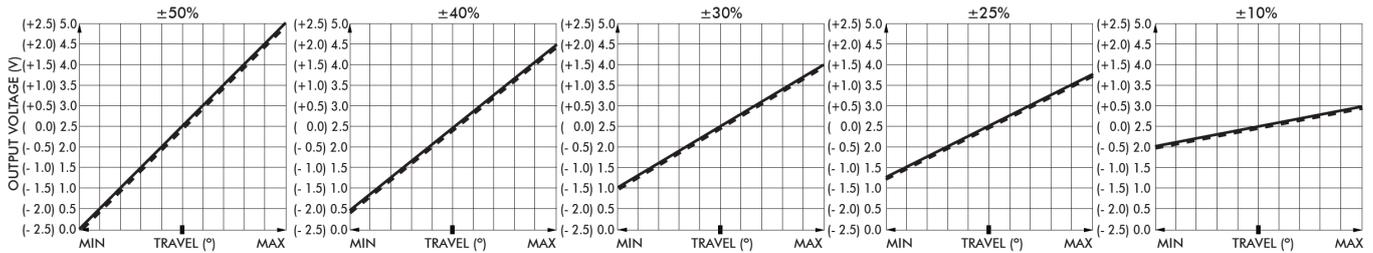

### DUAL OUTPUT CONFIGURATION 2

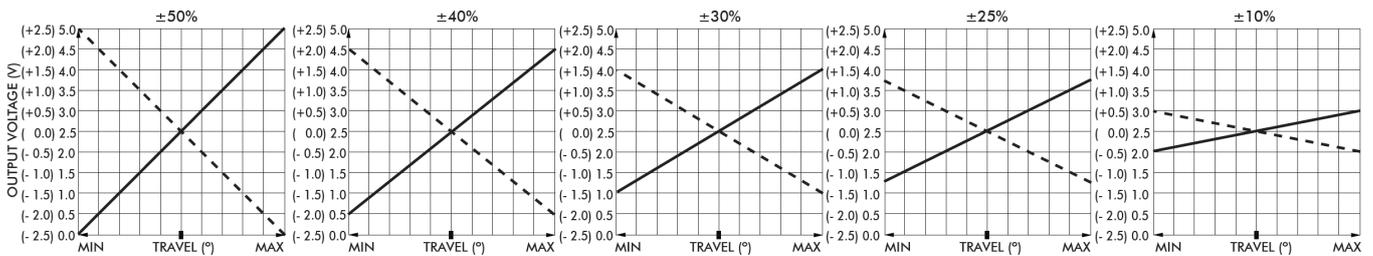

# BL series

Miniature paddle joystick controllers • non-contacting Hall effect technology



## CONFIGURATION

### OUTPUT OPTIONS

The BL series paddle joystick is configured as two “electrical” controls in one mechanical package. The Paddle operates from 5V and provides two proportional outputs. The second output is accurate to the first within  $\pm 3\%$  of the power supply. The power supply for the secondary output is also completely independent. Customers may choose their preference of voltage outputs (gains).

The secondary output can be of the same or inverse polarity to the primary wiper. For example, with a secondary inverse output, the first and second outputs can be summed and compared to zero to verify that the joystick is operating correctly. Paddles having two identical outputs of the same polarity may be used to drive two identical dual redundant circuits.

There are also two Hall effect switches that trigger at pre-determined lever positions.

The BL series paddle joystick may be specified with a variety of PWM output options. For more details on available PWM options please refer to APEM

### GAIN OPTIONS

The voltage output on the wiper, at full scale deflection is determined by the gain. The gain is expressed as a percentage of the voltage supplied. Therefore (assuming a 5 V supply) a Paddle specified with  $\pm 25\%$  gain would yield 1.25 V at South, 2.5 V at center and 3.75 V at North. A range of gain options are available as standard.

All controls are supplied pre-set and no further calibration is needed throughout the lifetime of operation.

### OUTPUT IMPEDANCE

The voltage outputs at center and at each end of travel are specified across an infinite load, with no current flowing. The output impedance specified in the electrical specification should be taken into account when designing a system. Load resistance of less than 10 K Ohms is not recommended.

### POWER SUPPLY

The BL is designed to be powered by a regulated  $5V \pm 0.5V$  power supply. The outputs are ratiometric, making a stable, noise free, power supply essential. The power supply to the joystick should be carefully regulated to be within tolerance. Should the power supply change outside of the specified tolerances, permanent damage may occur.

### MAGNETIC IMMUNITY AND SYSTEM DESIGN

The BL Series incorporates internal magnetic screening to minimize the effect of external magnetic fields. Mounting or operating the Paddle close to strong magnetic fields is not recommended. System designers should follow best practice when incorporating the BH Series Paddle into their products. Care should be taken to decouple the power supply properly and to employ adequate EMC shielding.

### MOUNTING

When mounting the Paddle, care should be taken to site it in a position that does not make vulnerable to damage when in use. If the Paddle is intended for use in a handheld enclosure then care must be taken to protect the Paddle from damage caused by dropping. For long term reliability, basic precautions should be implemented, such as mounting it at the lightest end of the enclosure or by protecting it with a guard.

The body of the Paddle, on the underside of the panel, must not be subject to water spray, excessive humidity or dust.