

QPD T 2PE1,5 2X8-13 BK - T distributor



1414713

<https://www.phoenixcontact.com/us/products/1414713>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



T distributor, product family: QPD, connection method: IDC connection, number of positions: 2+PE, 0.5 mm² ... 1.5 mm², 690 V, 17.5 A, PA, black, With two QUICKON nuts, coding: Coding profile, external cable diameter: 10 mm ... 13 mm

Your advantages

- Innovative and time saving - QUICKON fast connection for time saving of up to 80 % for on-site connection
- Robust throughout: housing with IP68/IP69K and IK07 protection for a wide range of applications
- Safer connection with mechanical coding to protect against mismatching, and touch-proof protection in accordance with DIN EN 0105
- Flexible and compact - by connecting connections internally, H and T-distributors can be used to branch master cables or they can be used as star distributors

Commercial data

Item number	1414713
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF50
Product key	BF6DAA
Catalog page	Page 473 (C-2-2019)
GTIN	4055626032115
Weight per piece (including packing)	110.5 g
Weight per piece (excluding packing)	106.724 g
Customs tariff number	85366990
Country of origin	PL

QPD T 2PE1,5 2X8-13 BK - T distributor



1414713

<https://www.phoenixcontact.com/us/products/1414713>

Technical data

Product properties

Product type	Power distributor
Product family	QPD
Type	T distributor
Number of positions	3
Connection profile	2+PE
Position marking	1, 2, PE
Number of connections	2
No. of cable outlets	3
Coding	Coding profile

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Connection data


Connection technology

Connection method	IDC connection
Frequency of connections between conductors of the same cross section	max. 10

Conductor connection

Conductor cross section flexibel	0.5 mm ² ... 1.5 mm ²
Conductor cross section solid	0.5 mm ² ... 1.5 mm ²
Connection cross section AWG	20 ... 16
Tightening torque Union nut	8 Nm
Tightening torque Locking nut	5 Nm

Dimensions

Dimensional drawing	
Width	71.1 mm
Height	26 mm
Length	147.8 mm

Electrical properties

Rated surge voltage (II/2)	8 kV
Rated surge voltage (III/2)	8 kV
Rated surge voltage (III/3)	6 kV
Rated current	17.5 A

QPD T 2PE1,5 2X8-13 BK - T distributor



1414713

<https://www.phoenixcontact.com/us/products/1414713>

Contact resistance	< 3 mΩ
rated voltage (II/2)	1000 V
rated voltage (III/2)	1000 V
Rated voltage (III/3)	690 V
Nominal voltage U_N	690 V AC
	690 V DC
Nominal current I_N	17.5 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	max. 50 (QUICKON connections max. 10)
-----------------------------	---------------------------------------

Material specifications

Color	black (RAL 9005)
Material Housing	PA
Material Contact	Cu
Material Contact surface	Silver-plated
Flammability rating according to UL 94	V0
Material wire insulation	PVC/PE/TPE/rubber

Cable/line

Structure of individual litz in acc. with VDE 0295 / smallest wire diameter	VDE 0295 class 1 to 6/min. 0.15 mm
External cable diameter	10 mm ... 13 mm
Wire diameter including insulation	1.6 mm ... 3 mm
Position marking	1, 2, PE
Material wire insulation	PVC/PE/TPE/rubber

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP66
	IP68 (2 m / 24 h)
	IP69K (Distance from the nozzle 150 mm)
Ambient temperature (operation)	-40 °C ... 100 °C
Temperature when conductor connected	-5 °C ... 50 °C
Ambient temperature (storage/transport)	-40 °C ... 100 °C

QPD T 2PE1,5 2X8-13 BK - T distributor




1414713

<https://www.phoenixcontact.com/us/products/1414713>


Drawings

Dimensional drawing

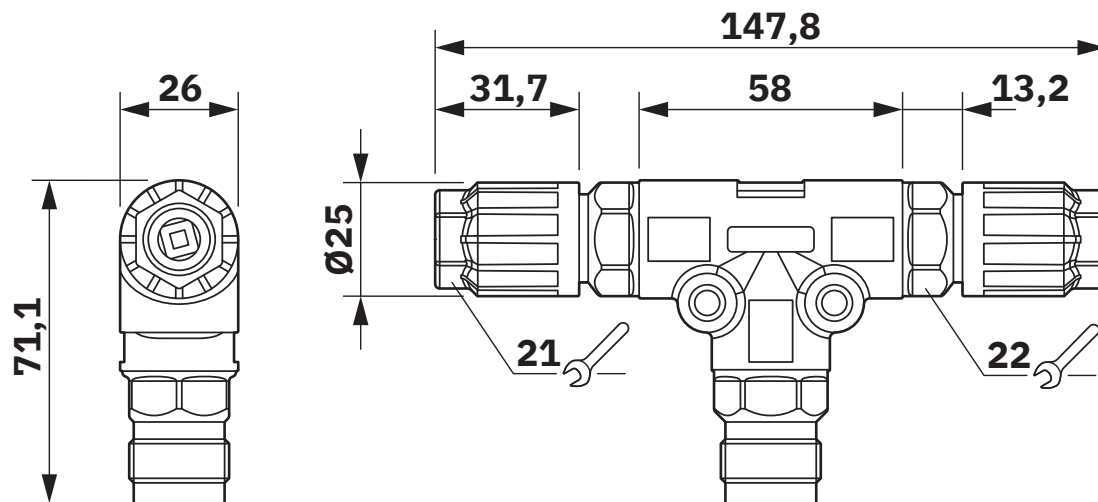


Dimensional drawing

Circuit diagram

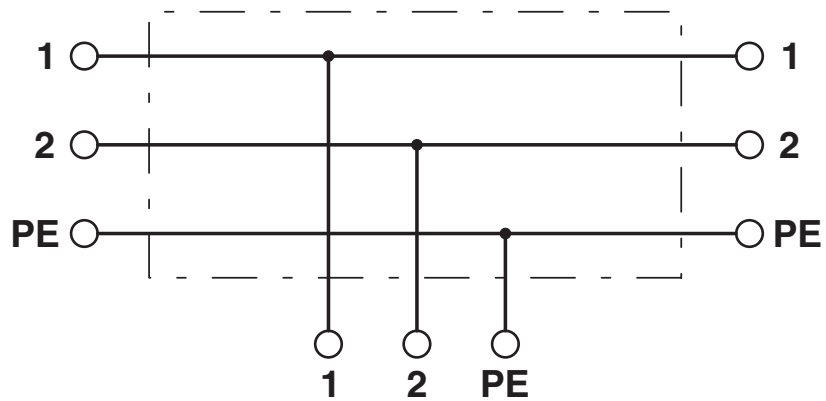

1414713

<https://www.phoenixcontact.com/us/products/1414713>

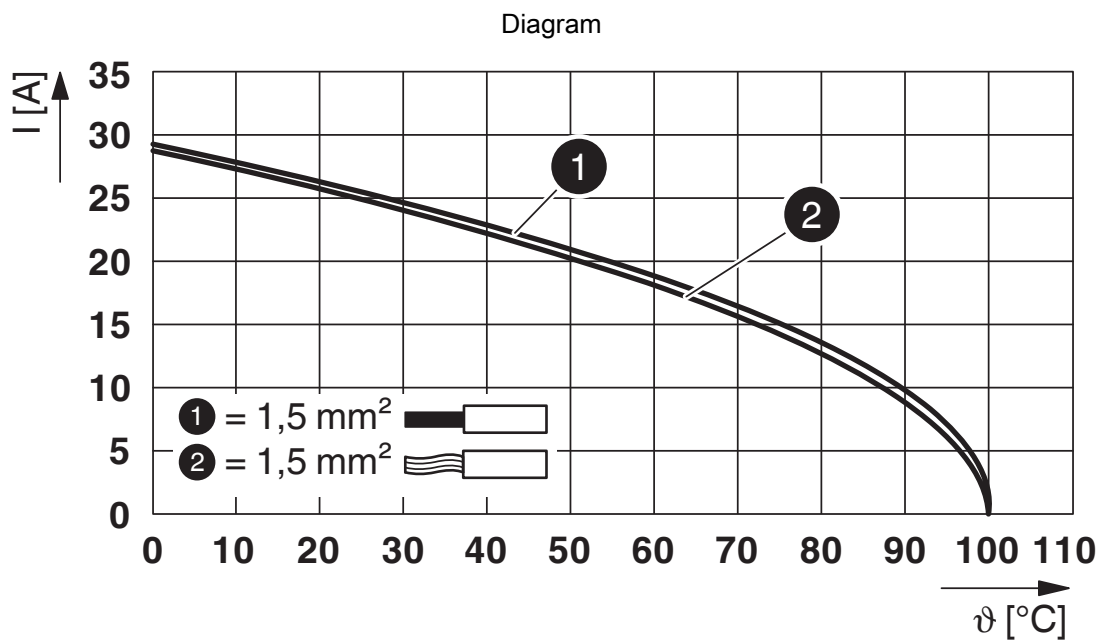

Derating diagram

QPD T 2PE1,5 2X8-13 BK - T distributor



1414713

<https://www.phoenixcontact.com/us/products/1414713>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1414713>



IECEE CB Scheme
Approval ID: DE1-65875



EAC
Approval ID: RU C-DE.BL08.B.00511



DNV GL
Approval ID: TAE00003J5



VDE Zeichengenehmigung
Approval ID: 40029149

	UL Listed Approval ID: E468743			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	8 A	-	- 16

	cUL Listed Approval ID: E468743			
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	600 V	8 A	- 16	-

cULus Listed

QPD T 2PE1,5 2X8-13 BK - T distributor



1414713

<https://www.phoenixcontact.com/us/products/1414713>

Classifications

ECLASS

ECLASS-11.0	27440603
ECLASS-12.0	27440603
ECLASS-13.0	27440603

ETIM

ETIM 9.0	EC002567
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

QPD T 2PE1,5 2X8-13 BK - T distributor

1414713

<https://www.phoenixcontact.com/us/products/1414713>



Mandatory accessories

QPD P 2PE1,5 8-13 BK - Connector

1414706

<https://www.phoenixcontact.com/us/products/1414706>



Connector, product family: QPD, connection method: IDC connection, number of positions: 2+PE, 0.5 mm² ... 1.5 mm², 690 V, 17.5 A, PA, black, with QUICKON nut, coding: Coding profile, external cable diameter: 10 mm ... 13 mm

QPD N 2PE1,5 8-13 BK - Nut

1415100

<https://www.phoenixcontact.com/us/products/1415100>



Nut, product family: QPD, connection method: IDC connection, number of positions: 2+PE, 0.5 mm² ... 1.5 mm², 690 V, 17.5 A, PA, black, external cable diameter: 10 mm ... 13 mm

Accessories

QPD T 2PE1,5 2X8-13 BK - T distributor

1414713

<https://www.phoenixcontact.com/us/products/1414713>



CP-QPD 3/4X1,5 - Coding profile

1414729

<https://www.phoenixcontact.com/us/products/1414729>



Coding profile red, for pushing into the QUICKON dome and connector, can be positioned in 90° steps.

SEALING PLUG 10X16 RD - Closing cap

1400284

<https://www.phoenixcontact.com/us/products/1400284>



Closing cap, for threads pluggable, color: red

QPD T 2PE1,5 2X8-13 BK - T distributor

1414713


<https://www.phoenixcontact.com/us/products/1414713>



GPE 13X 9 WH - Engraving material

0806932

<https://www.phoenixcontact.com/us/products/0806932>



Engraving material, Sheet, white, unlabeled, can be labeled with: PLOTMARK, ENGRAVING UNIT, CMS-P1-PLOTTER, P1 ENGRAVING UNIT, mounting type: adhesive, lettering field size: 13 x 9 mm, Number of individual labels: 120

EMLP (13X9)R - Label

0819453

<https://www.phoenixcontact.com/us/products/0819453>



Label, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, mounting type: adhesive, lettering field size: 13 x 9 mm, Number of individual labels: 500

QPD T 2PE1,5 2X8-13 BK - T distributor

1414713

<https://www.phoenixcontact.com/us/products/1414713>



QPD QSK BK 3/4X1,5 FS - Protective cap

1414722

<https://www.phoenixcontact.com/us/products/1414722>

Protective cap, plastic, for QUICKON connection, black, with retaining cord, IP68



QPD QSK 3/4X1,5 - Protective cap

1414723

<https://www.phoenixcontact.com/us/products/1414723>

Protective cap plastic, for QPD-QUICKON connection 3(4) x 1.5 mm², IP50



QPD T 2PE1,5 2X8-13 BK - T distributor

1414713

<https://www.phoenixcontact.com/us/products/1414713>



QPD W 2PE1,5 8-13 M20 0,5 BK - Panel feed-through

1414687

<https://www.phoenixcontact.com/us/products/1414687>




Panel feed-through, product family: QPD, connection method: Single wires/ IDC connection, number of positions: 2+PE, M20, Pin, 0.5 mm² ... 1.5 mm², 690 V, 17.5 A, PA, black, with QUICKON nut, coding: Coding profile, external cable diameter: 10 mm ... 13 mm, 1.5 mm², cable length: 0.5 m

QPD W 2PE1,5 8-13 M20 1,0 BK - Panel feed-through

1414688

<https://www.phoenixcontact.com/us/products/1414688>



Panel feed-through, product family: QPD, connection method: Single wires/ IDC connection, number of positions: 2+PE, M20, Pin, 0.5 mm² ... 1.5 mm², 690 V, 17.5 A, PA, black, with QUICKON nut, coding: Coding profile, external cable diameter: 10 mm ... 13 mm, 1.5 mm², cable length: 1 m

QPD T 2PE1,5 2X8-13 BK - T distributor

1414713

<https://www.phoenixcontact.com/us/products/1414713>



QPD W 2PE1,5 8-13 M20 FC BK - Panel feed-through

1414689

<https://www.phoenixcontact.com/us/products/1414689>



Panel feed-through, product family: QPD, connection method: Spade connection (For slip-on sleeves according to DIN 46247-2)/ IDC connection, number of positions: 2+PE, M20, Pin, 0.5 mm² ... 1.5 mm², 690 V, 15 A, PA, black, with QUICKON nut, coding: Coding profile, external cable diameter: 10 mm ... 13 mm, 1.5 mm²

QPD C 2PE1,5 1X8-13 BK - Conductor connector

1414701

<https://www.phoenixcontact.com/us/products/1414701>



Conductor connector, product family: QPD, connection method: IDC connection, number of positions: 2+PE, 0.5 mm² ... 1.5 mm², 690 V, 17.5 A, PA, black, with one QUICKON nut, coding: Coding profile, external cable diameter: 10 mm ... 13 mm

QPD T 2PE1,5 2X8-13 BK - T distributor

1414713

<https://www.phoenixcontact.com/us/products/1414713>



QPD C 2PE1,5 2X8-13 BK - Conductor connector

1414702

<https://www.phoenixcontact.com/us/products/1414702>



Conductor connector, product family: QPD, connection method: IDC connection, number of positions: 2+PE, 0.5 mm² ... 1.5 mm², 690 V, 17.5 A, PA, black, With two QUICKON nuts, coding: Coding profile, external cable diameter: 10 mm ... 13 mm

QPD T 2PE1,5 3X8-13 BK - T distributor

1414714

<https://www.phoenixcontact.com/us/products/1414714>



T distributor, product family: QPD, connection method: IDC connection, number of positions: 2+PE, 0.5 mm² ... 1.5 mm², 690 V, 17.5 A, PA, black, With three QUICKON nuts, coding: Coding profile, external cable diameter: 10 mm ... 13 mm

QPD T 2PE1,5 2X8-13 BK - T distributor

1414713

<https://www.phoenixcontact.com/us/products/1414713>



QPD H 2PE1,5 4X8-13 BK - H distributor

1414720

<https://www.phoenixcontact.com/us/products/1414720>



H distributor, product family: QPD, connection method: IDC connection, number of positions: 2+PE, 0.5 mm² ... 1.5 mm², 690 V, 17.5 A, PA, black, with four QUICKON nuts, coding: Coding profile, external cable diameter: 10 mm ... 13 mm, with a sealing bolt

QSS 22 - Socket wrench

1670206

<https://www.phoenixcontact.com/us/products/1670206>



Allen wrench, for loosening and fastening the QUICKON union nut, WAF 22 mm

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com