



WRD-750 UG Square Cover Flange to N Female Waveguide to Coax Adapter Operating from 7.5 GHz to 18 GHz in Copper Alloy

Waveguide to Coax Adapters Technical Data Sheet

PEWCA1118

Features

- 7.5 GHz to 18 GHz Frequency Range
- WRD-750 Double Ridge Waveguide Interface
- UG Square Cover Flange
- N Female RF Interface
- Comprehensive waveguide offering also include E-Bends, H-Bends, Sections, Filters, Terminations, Couplers, and more.

Applications

- Test Benches
- Radar
- Satellite
- Microwave Radio Systems
- Military and Space
- Communication Systems

Description

The PEWCA1118 is an end launch double ridge waveguide to coaxial adapter operating at a frequency range of 7.5 GHz to 18 GHz. This adapter offers a WRD-750 waveguide interface size coupled with a precision tolerance Square Cover flange. The PEWCA1118 is constructed of copper alloy and painted gray to ensure durability. The coaxial connector offered by this adapter uses an N Female connector.

Configuration

Waveguide Size	WRD-750
Flange	UG Square Cover
RF Connector	N Female
Impedance	50 Ohms
Body Geometry	End Launch

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	7.5		18	GHz
VSWR		1.5:1		
Insertion Loss			0.5	dB
Input Power (CW)			100	Watts

Mechanical Specifications

Weight	0.5 lbs [226.8 g]
RF Connector	
Connector Type	N Female
Waveguide Interface	
Waveguide Type	WRD-750
Flange Type	Square Cover
Flange Designation	UG

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WRD-750 UG Square Cover Flange to N Female Waveguide to Coax Adapter Operating from 7.5 GHz to 18 GHz in Copper Alloy PEWCA1118](#)



WRD-750 UG Square Cover Flange to N Female Waveguide to Coax Adapter Operating from 7.5 GHz to 18 GHz in Copper Alloy

Waveguide to Coax Adapters Technical Data Sheet

PEWCA1118

Body Material and Plating

Copper Alloy

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level unless stated otherwise

WRD-750 UG Square Cover Flange to N Female Waveguide to Coax Adapter Operating from 7.5 GHz to 18 GHz in Copper Alloy from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WRD-750 UG Square Cover Flange to N Female Waveguide to Coax Adapter Operating from 7.5 GHz to 18 GHz in Copper Alloy PEWCA1118](#)


URL: <https://www.pasternack.com/wrd750-ug-square-flange-to-end-launch-type-n-female-waveguide-coax-adapter-pewca1118-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PEWCA1118 CAD Drawing

WRD-750 UG Square Cover Flange to N Female Waveguide to Coax
Adapter Operating from 7.5 GHz to 18 GHz in Copper Alloy

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/6/2020	S.PONG

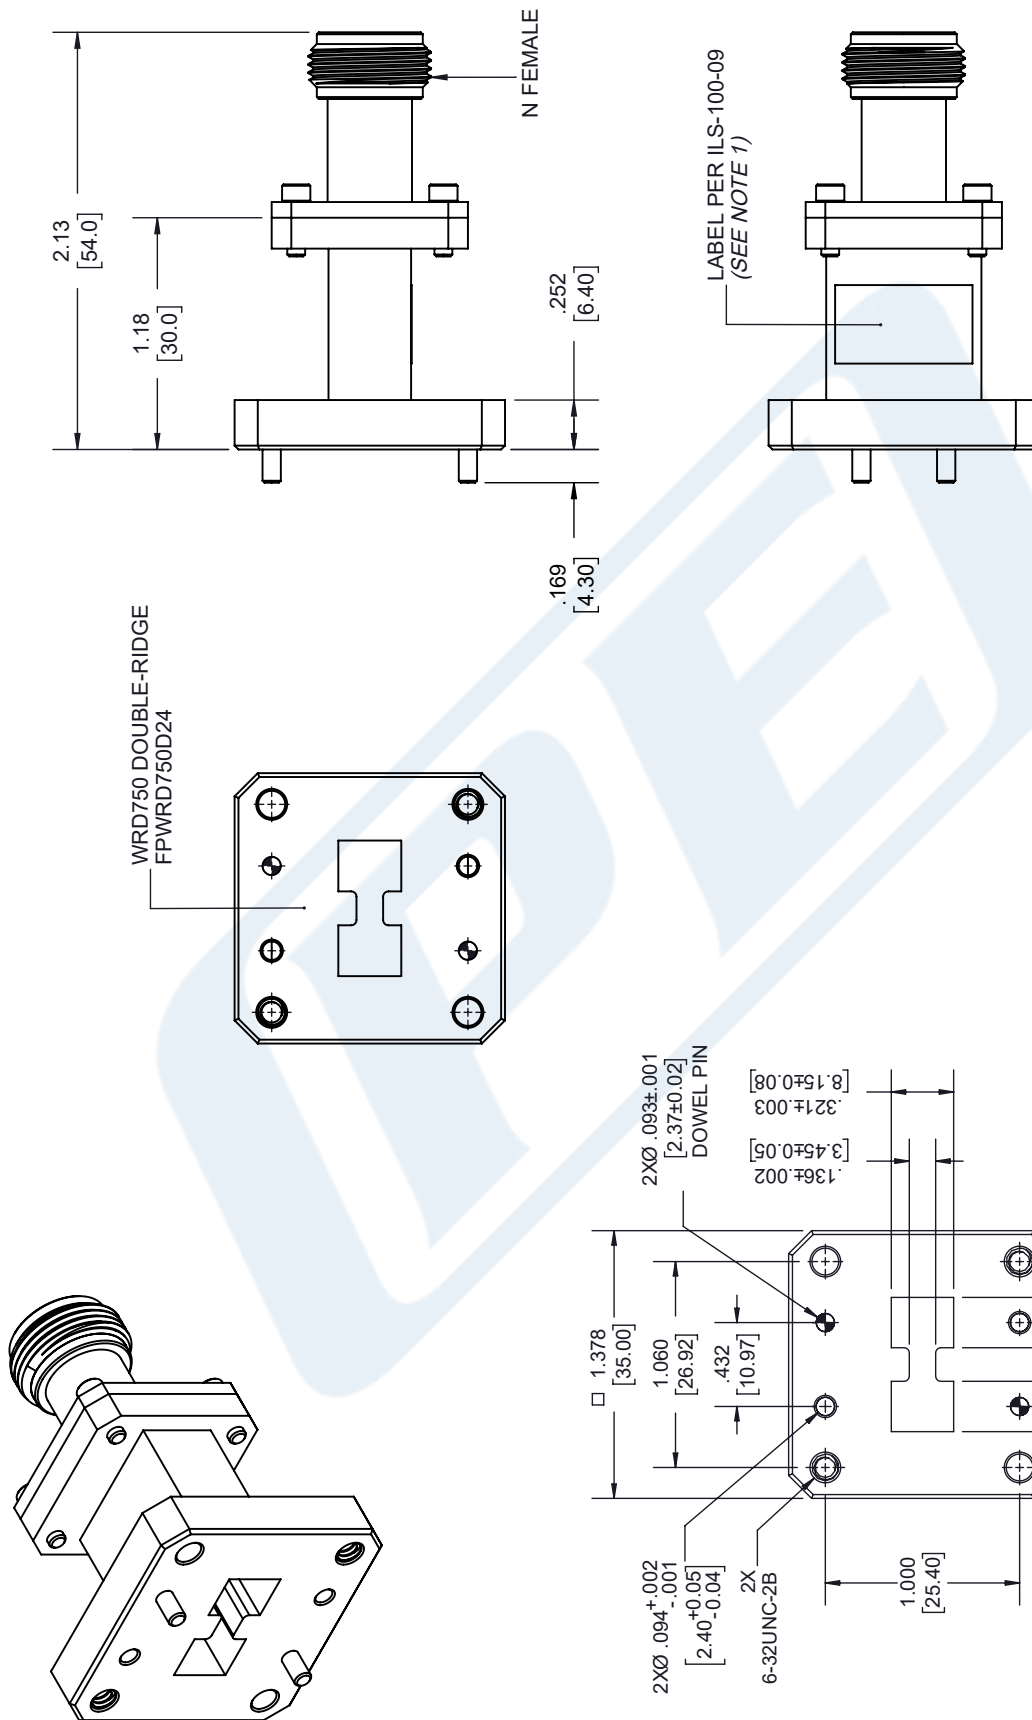

PE PASTERNAK® an INFINITE® brand Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com		THIRD-ANGLE PROJECTION THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED. SHEET 1 OF 1 SCALE N/A REV A	
UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS TOLERANCES: X = ±.2 [5.08] XX = ±.02 [.51] XXX = ±.005 [.13] CABLE LENGTH (L) TOLERANCES: L ≤ 12 [305] = ±1 [25] / -0 12 [305] < L ≤ 60 [1524] = ±2 [51] / -0 60 [1524] < L ≤ 120 [3048] = ±4 [102] / -0 120 [3048] < L ≤ 300 [7620] = ±6 [152] / -0 300 [7620] < L = +5% / -0 ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.	SIZE A CAGE CODE 53919 DRAWN BY K.DANG ITEM NO. PEWCA1118		

NOTES:

1. LABEL PER ILS-100-09. FOR INTERNAL REFERENCE ONLY.
LABEL LOCATION FOR REFERENCE ONLY.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.