



50 Ohm SMA Amplifier Operating From 100 MHz to 3 GHz With 18 dB Gain And 16 dB P1db

TECHNICAL DATA SHEET

PE1516

**50 Ohm SMA Amplifier Operating From 100 MHz to 3 GHz With 18 dB Gain And 16 dB P1db**

**Configuration**

Design	Broadband Amplifier
RF Input Connector	SMA Female
RF Input Connector Impedance	50 Ohms
RF Output Connector	SMA Female
RF Output Connector Impedance	50 Ohms
DC Bias Connector	Solder Pin

**Electrical Specifications**

Frequency Range, GHz	0.1 to 3
Typical Gain, dB	18
Output at 1 dB Compression Point, dBm	16
Operating DC Voltage, Volts	9 to 15
Maximum DC Current, mA	120

**Frequency 1**

Frequency, MHz	100 to 1,000
Input Return Loss, dB	18
Gain, dB	18

**Frequency 2**

Frequency, GHz	1 to 2
Return Loss, dB	20
Gain, dB	21

**Frequency 3**

Frequency, GHz	2 to 3
Return Loss, dB	18
Gain, dB	18

**Mechanical Specifications**

**Temperature**

Operating Range, deg C	-10 to +65
------------------------	------------

**Size**

Length, in [mm]	2.18 [55.37]
Width/Dia., in [mm]	1.18 [29.97]
Height, in [mm]	0.49 [12.45]

**RF Input Connector**

Type	SMA Female
------	------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm SMA Amplifier Operating From 100 MHz to 3 GHz With 18 dB Gain And 16 dB P1db PE1516](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



50 Ohm SMA Amplifier Operating From 100 MHz  
to 3 GHz With 18 dB Gain And 16 dB P1db

TECHNICAL DATA SHEET

PE1516

**RF Output Connector**

Type SMA Female

**DC Bias Connector**

Type Solder Pin

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant Yes

**Plotted and Other Data**

Notes: Values at 25 °C, sea level

50 Ohm SMA Amplifier Operating From 100 MHz to 3 GHz With 18 dB Gain And 16 dB P1db from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm SMA Amplifier Operating From 100 MHz to 3 GHz With 18 dB Gain And 16 dB P1db PE1516](http://www.pasternack.com/50-ohm-sma-amplifier-100-mhz-3000-mhz-18-db-gain-pe1516-p.aspx)

URL: <http://www.pasternack.com/50-ohm-sma-amplifier-100-mhz-3000-mhz-18-db-gain-pe1516-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

# PE1516 CAD Drawing

50 Ohm SMA Amplifier Operating From 100 MHz to  
3 GHz With 18 dB Gain And 16 dB P1db

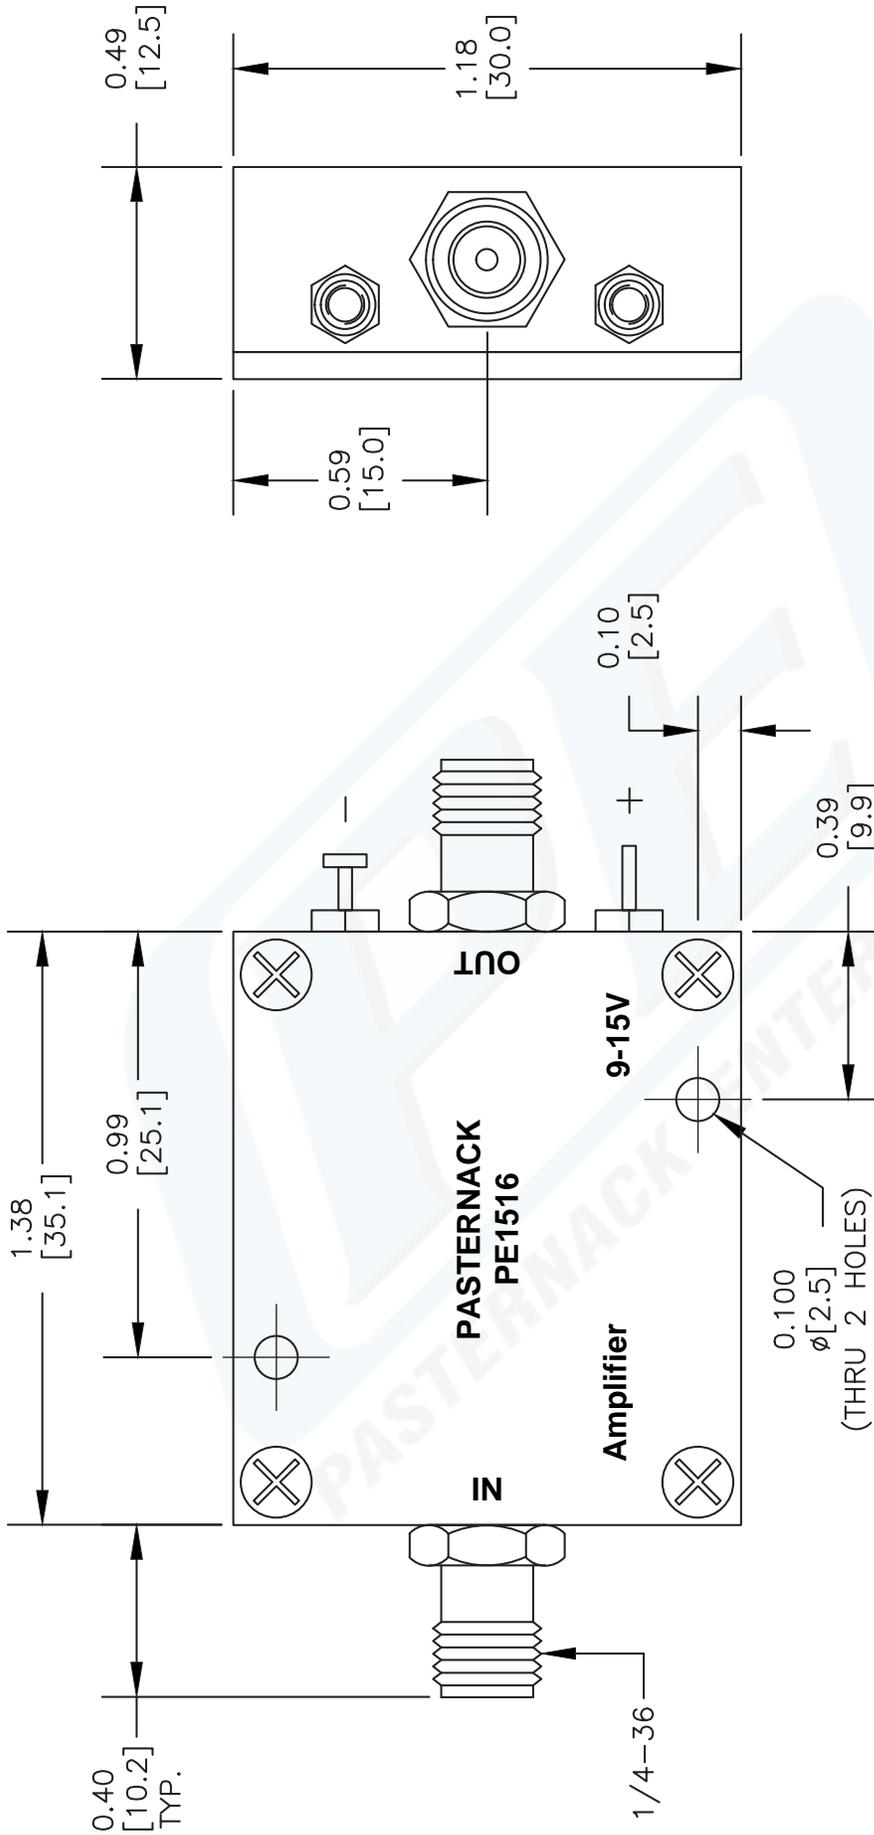

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
**PE1516**

FSCM NO. 53919

127

SIZE A

SCALE N/A

CAD FILE 102610

**PASTERNAK**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com