



3 Watt P1dB, 2 GHz to 6 GHz, Medium Power
Broadband Amplifier, 36 dB Gain, 6 dB NF, SMA

TECHNICAL DATA SHEET

PE15A4042

The PE15A4042 is a broadband coaxial power amplifier, operating in the 2.0 to 6.0 GHz frequency range. The amplifier offers 34 dBm of P1dB typ and 36 dB small signal gain typ, with the gain flatness of ± 1.5 dB typ. This power amplifier requires only a single positive DC supply, is unconditionally stable, operates over the temperature range of -30°C to 70°C , and is Hermetically sealed.

Features

- 2.0 to 6.0 GHz Frequency Range
- P1dB: 34 dBm typ
- Small Signal Gain: 36 dB typ
- Gain Flatness: ± 1.5 dB typ
- 50 Ohm Input and Output Matched
- -30 to $+70^{\circ}\text{C}$ Operating Temperature
- Unconditionally Stable
- Single DC Positive Supply
- Built-in DC Voltage Regulator

Applications

- Laboratory Applications
- R&D Labs
- Test Instrumentation
- Military & Space
- Communication Systems
- Satellite Communications
- Wireless Communications
- Unmanned Systems
- Microwave Radio Systems
- Low Noise Amplifier
- General Purpose Amplification
- RF Front Ends

Electrical Specifications (TA= 25°C)

Description	Minimum	Typical	Maximum	Units
Frequency Range	2		6	GHz
Gain	34	36		dB
Gain Flatness		± 1.5	± 2	dB
Output at 1 dB Compression Point	33	34		dBm
Noise Figure		6	7	dB
Input VSWR		1.8:1	2:01	
Output VSWR		1.8:1	2:01	
Switching Time		10,000		nsec
TTL Control	High +5V = On, Low 0V = Off			
Operating DC Voltage 1	12		15	Volts
Operating DC Current		2,200	2,400	mA
Operating Temperature Range (OTR)	-30		70	$^{\circ}\text{C}$

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3 Watt P1dB, 2 GHz to 6 GHz, Medium Power Broadband Amplifier, 36 dB Gain, 6 dB NF, SMA PE15A4042](#)



3 Watt P1dB, 2 GHz to 6 GHz, Medium Power
Broadband Amplifier, 36 dB Gain, 6 dB NF, SMA

TECHNICAL DATA SHEET

PE15A4042

Mechanical Specifications

Size

Length	3.87 in [98.3 mm]
Width	3.64 in [92.46 mm]
Height	0.67 in [17.02 mm]
Weight	0.724 lbs [328.4 g]

Input Connector	SMA Female
Output Connector	SMA Female

Environmental Specifications

Temperature

Operating Range	-30 to +70 deg C
-----------------	------------------

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3 Watt P1dB, 2 GHz to 6 GHz, Medium Power Broadband Amplifier, 36 dB Gain, 6 dB NF, SMA PE15A4042](#)




3 Watt P1dB, 2 GHz to 6 GHz, Medium Power
Broadband Amplifier, 36 dB Gain, 6 dB NF, SMA

TECHNICAL DATA SHEET

PE15A4042

Typical Performance Data

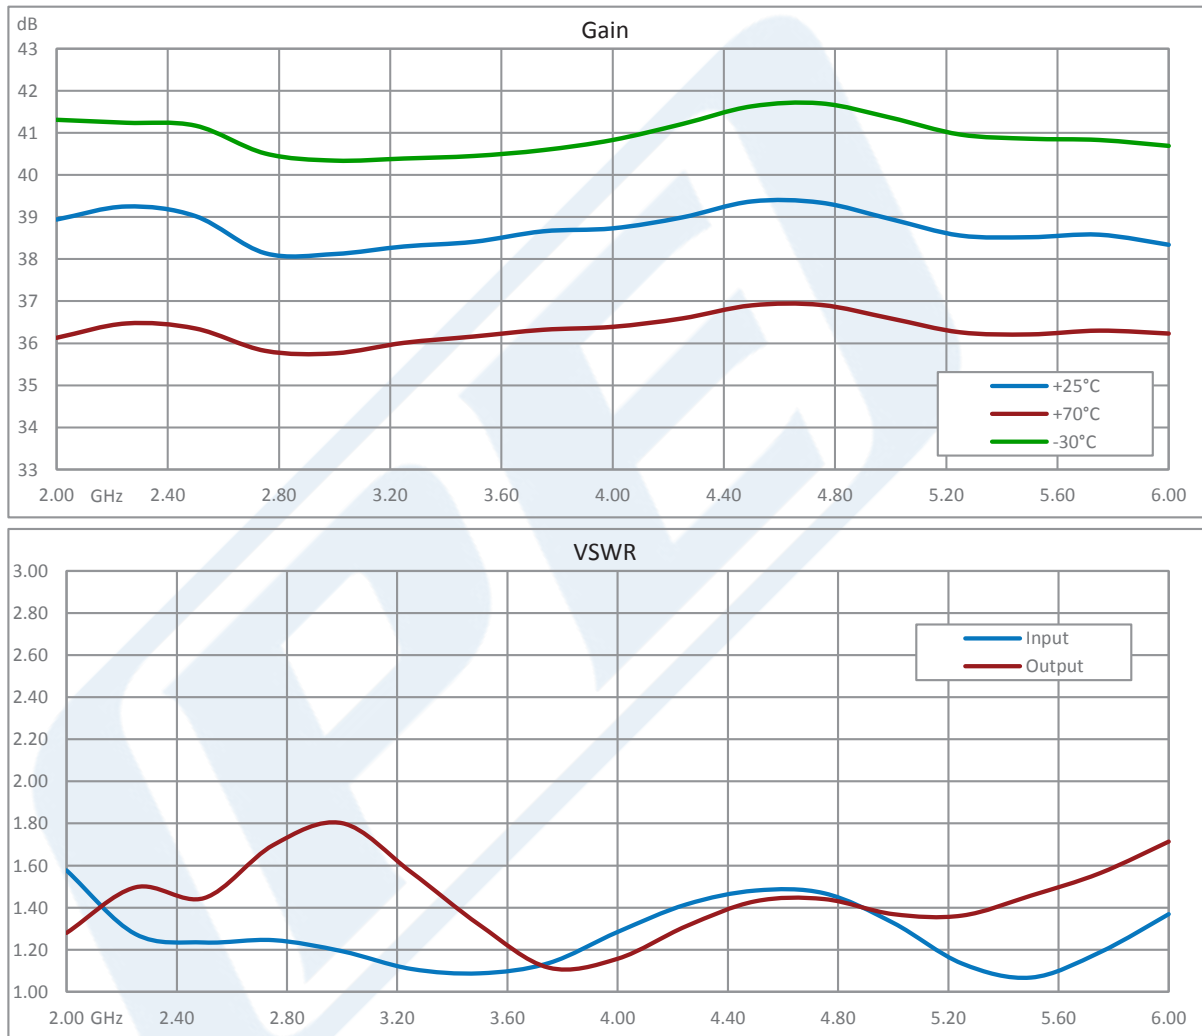


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3 Watt P1dB, 2 GHz to 6 GHz, Medium Power Broadband Amplifier, 36 dB Gain, 6 dB NF, SMA PE15A4042](#)



3 Watt P1dB, 2 GHz to 6 GHz, Medium Power
Broadband Amplifier, 36 dB Gain, 6 dB NF, SMA

TECHNICAL DATA SHEET

PE15A4042

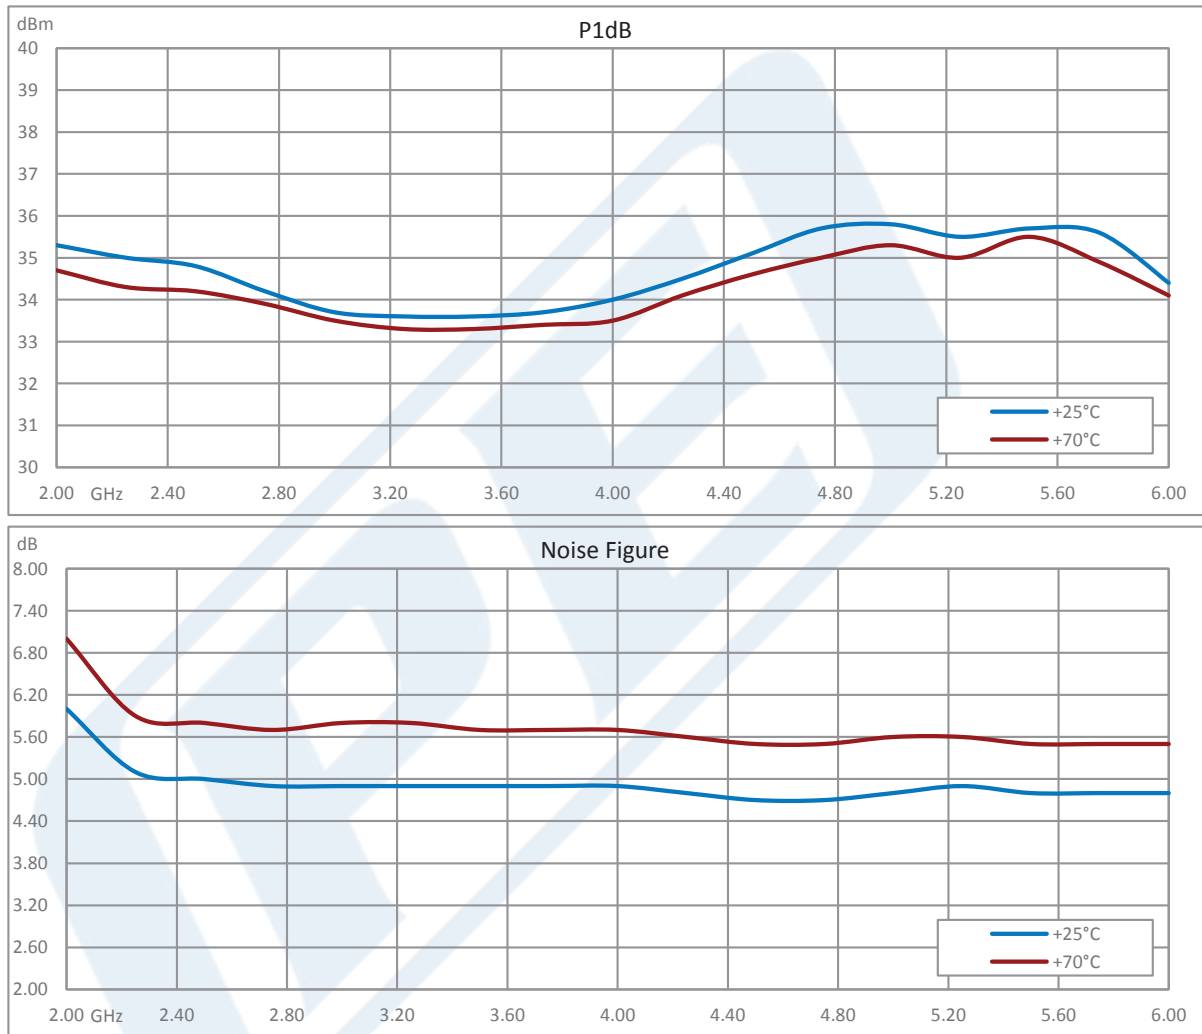

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3 Watt P1dB, 2 GHz to 6 GHz, Medium Power Broadband Amplifier, 36 dB Gain, 6 dB NF, SMA PE15A4042](#)



3 Watt P1dB, 2 GHz to 6 GHz, Medium Power
Broadband Amplifier, 36 dB Gain, 6 dB NF, SMA

TECHNICAL DATA SHEET

PE15A4042

3 Watt P1dB, 2 GHz to 6 GHz, Medium Power Broadband Amplifier, 36 dB Gain, 6 dB NF, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3 Watt P1dB, 2 GHz to 6 GHz, Medium Power Broadband Amplifier, 36 dB Gain, 6 dB NF, SMA PE15A4042](https://www.pasternack.com/6-ghz-medium-power-broadband-amplifier-36-db-gain-6-db-sma-pe15a4042-p.aspx)

URL: <https://www.pasternack.com/6-ghz-medium-power-broadband-amplifier-36-db-gain-6-db-sma-pe15a4042-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE15A4042 CAD Drawing

3 Watt P1dB, 2 GHz to 6 GHz, Medium Power Broadband
Amplifier, 36 dB Gain, 6 dB NF, SMA

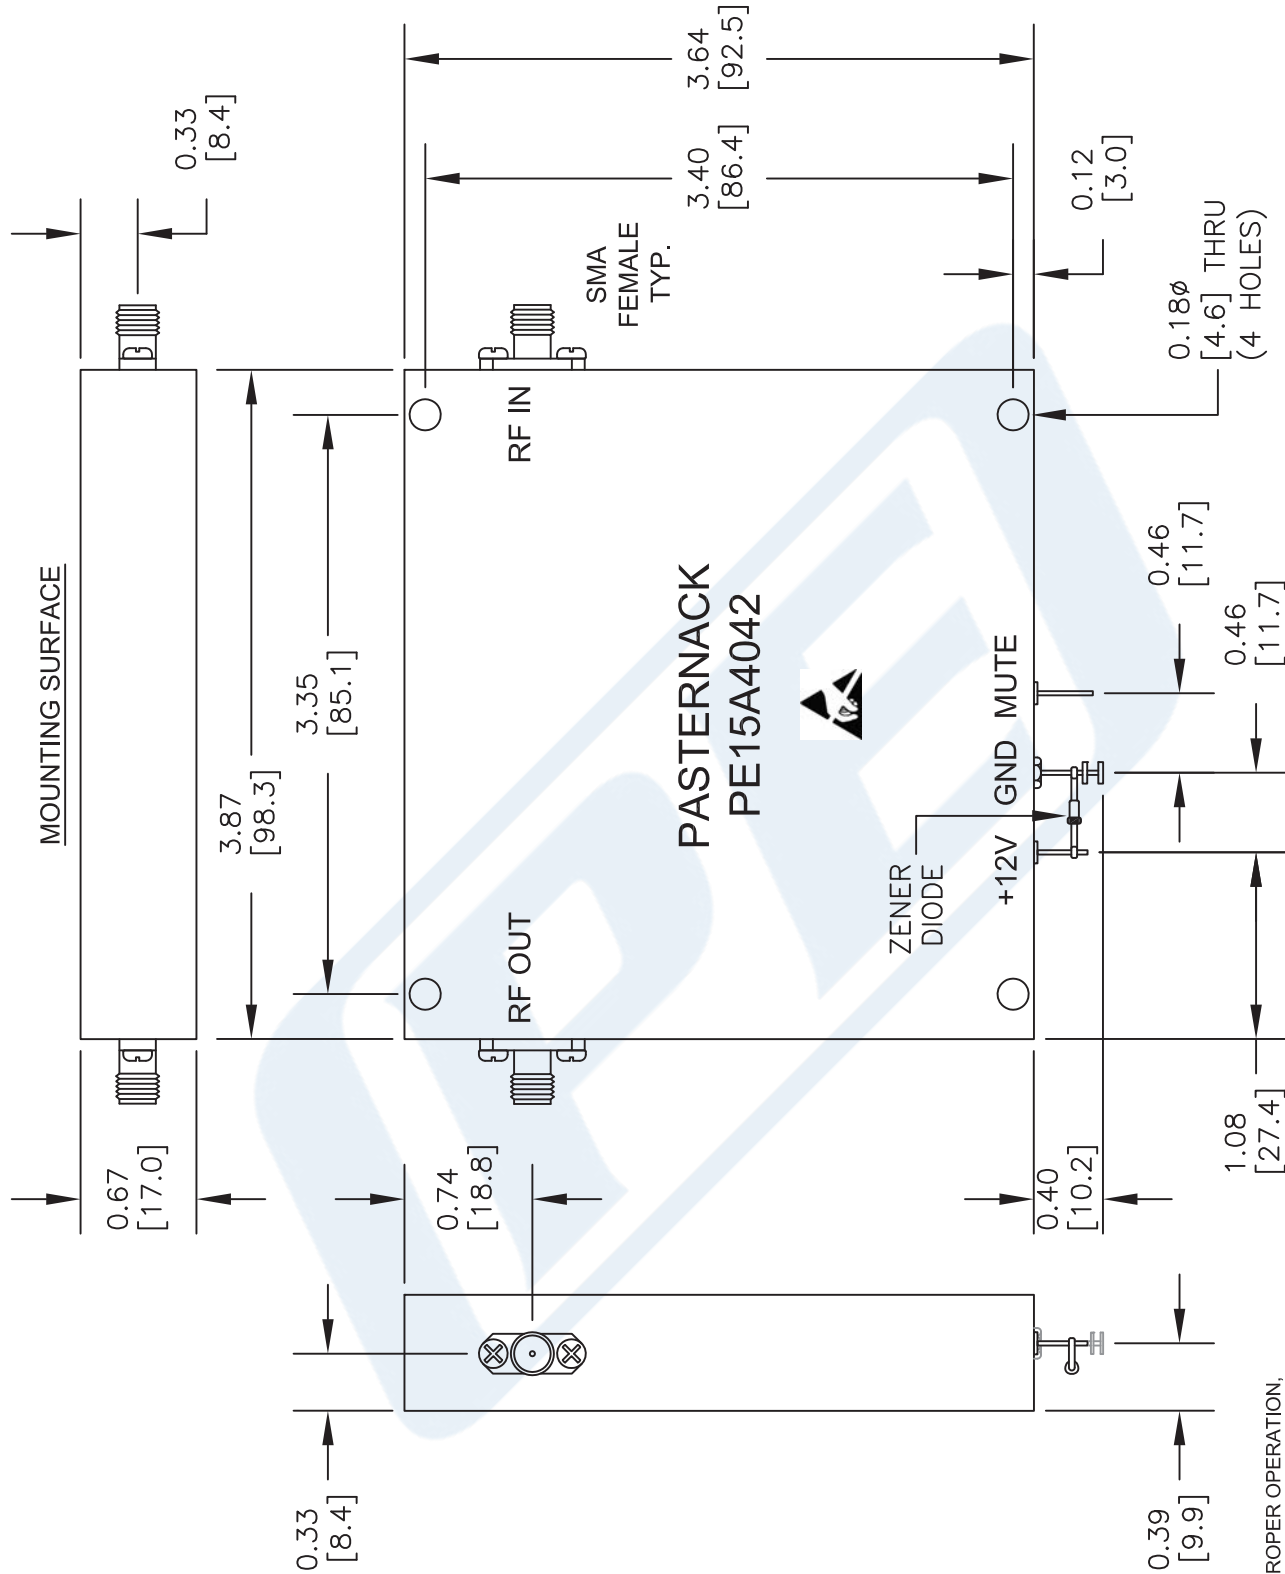

NOTE:
HEAT SINK REQUIRED FOR PROPER OPERATION,
UNIT IS COOLED BY CONDUCTING TO HEAT SINK.

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE15A4042

PASTERNAK®
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 032316

SCALE N/A

SIZE A

2233