



WR-15 Waveguide Power Amplifier, V Band, 50 GHz to 75 GHz, 34 dB Gain, 24 dBm Psat, UG-385/U Flange

Waveguide Power Amplifiers - PEWGA3219

Features

- WR-15 Waveguide Power Amplifier
- 50 GHz to 75 GHz
- V Band
- Small Signal Gain 34 dB typ
- Output P1dB: +22 dBm typ
- Output Psat: +24 dBm typ
- VSWR 1.6:1 typ
- DC Bias +6V @ 800 mA typ
- Max RF Input Power (CW) +5 dBm
- 50 Ohm Design
- RF Input and Output Waveguide Flange UG-385/U
- Solder Pins for DC Bias Voltage and Ground
- Operational Temperature Range -10°C to +45°C
- Rugged and Compact Gold Plated Aluminum Package Design with an Integrated Heatsink
- RoHS Compliant

Applications

- Test & Measurement
- Military & Commercial Communications
- Military Electronic Systems
- Research & Development

Description

The PEWGA3219 is a WR-15 Waveguide Power Amplifier, operating across the V Band from 50 GHz to 75 GHz. This 50 Ohm design exhibits impressive typical performance which includes 34 dB gain, +22 dBm P1dB, and +24 dBm Psat. Maximum RF input power (CW) is +5 dBm, and DC bias is +6 Vdc at 800 mA typ. The rugged and small size aluminum package design is gold plated with an integrated heatsink to ensure highly reliable operation. The RF input and output ports support a UG-385/U waveguide flange pattern. Solder pins are used for DC bias voltage and ground. The Power amplifier design is RoHS compliant and operates across a wide temperature range from -10°C to +45°C.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency	50		75	GHz
Small Signal Gain		34		dB
Saturated Output Power		24		dBm
Output at 1dB Compression Point		22		dBm
Input VSWR		2:01		
Output VSWR		1.3:1		
Operating DC Voltage	5	6	10	Volts
Operating DC Current		800		mA
Input Power (CW)			5	dBm
Operating Temperature Range	-10		45	°C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-15 Waveguide Power Amplifier, V Band, 50 GHz to 75 GHz, 34 dB Gain, 24 dBm Psat, UG-385/U Flange PEWGA3219](#)



WR-15 Waveguide Power Amplifier, V Band, 50 GHz to 75 GHz, 34 dB Gain, 24 dBm Psat, UG-385/U Flange

Waveguide Power Amplifiers - PEWGA3219

Electrical Specification Notes:

- 1.) DC Supply must be able to source at least 9A DC at startup.
- 2.) Open and short-circuit loads are not recommended at the amplifier output.
- 3.) Ensure proper 50 ohm load before turning the amplifier "ON".
- 4.) Reverse biasing will destroy the amplifier.
- 5.) Do not put any foreign objects inside the waveguide. Warranty will be voided.

Absolute Maximum Rating

Parameter	Rating
Operating Temperature	-10°C to +45°C
Storage Temperature	-40°C to +100°C
Total Power Dissipation	5W
Input Power (CW)	+5dBm
DC Operating Voltage	+12V

Mechanical Specifications

Length	2 in [50.8 mm]
Width	2 in [50.8 mm]
Height	1.8 in [45.72 mm]
Weight	0.05 lbs [22.68 g]
Body Material and Plating	Aluminum, Gold
Design	
DC Bias Connector	Solder Pin

Description	Input Port	Output Port
Type	WR-15	WR-15
Flange	UG-385/U	UG-385/U

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-15 Waveguide Power Amplifier, V Band, 50 GHz to 75 GHz, 34 dB Gain, 24 dBm Psat, UG-385/U Flange PEWGA3219](#)



WR-15 Waveguide Power Amplifier, V Band, 50 GHz to 75 GHz, 34 dB Gain, 24 dBm Psat, UG-385/U Flange

Waveguide Power Amplifiers - PEWGA3219

Environmental Specifications

Biassing Up Procedure

Biassing Up Procedure	
Step 1	Connect Ground Pin
Step 2	Apply DC Supply Voltage
Step 3	Turn ON RF input

Power Down Procedure	
Step 1	Turn OFF RF input
Step 2	Turn OFF DC Supply Voltage
Step 3	Remove Ground

Temperature

Operating Range
Storage Range


-10 to 45 deg C
-40 to 100 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data


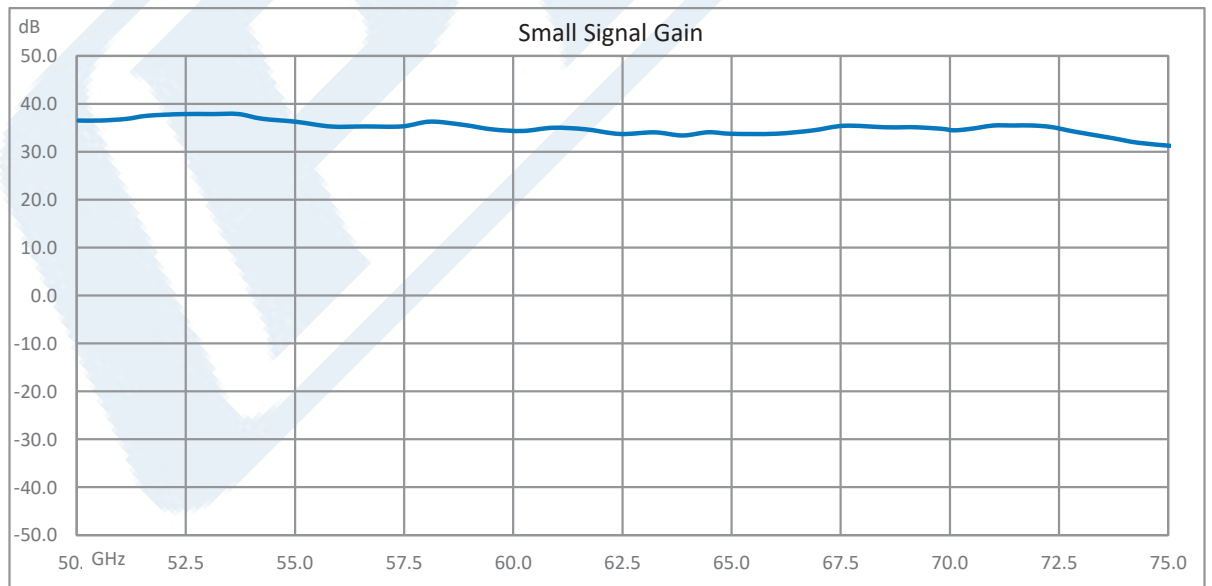


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-15 Waveguide Power Amplifier, V Band, 50 GHz to 75 GHz, 34 dB Gain, 24 dBm Psat, UG-385/U Flange PEWGA3219](#)



WR-15 Waveguide Power Amplifier, V Band, 50 GHz to 75 GHz, 34 dB Gain, 24 dBm Psat, UG-385/U Flange

Waveguide Power Amplifiers - PEWGA3219

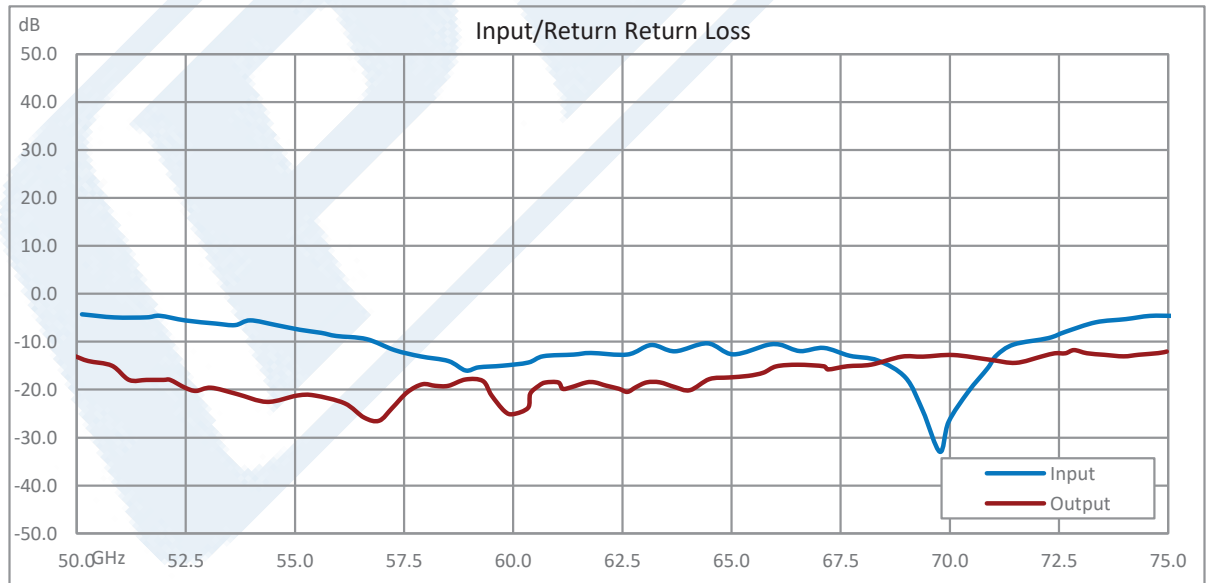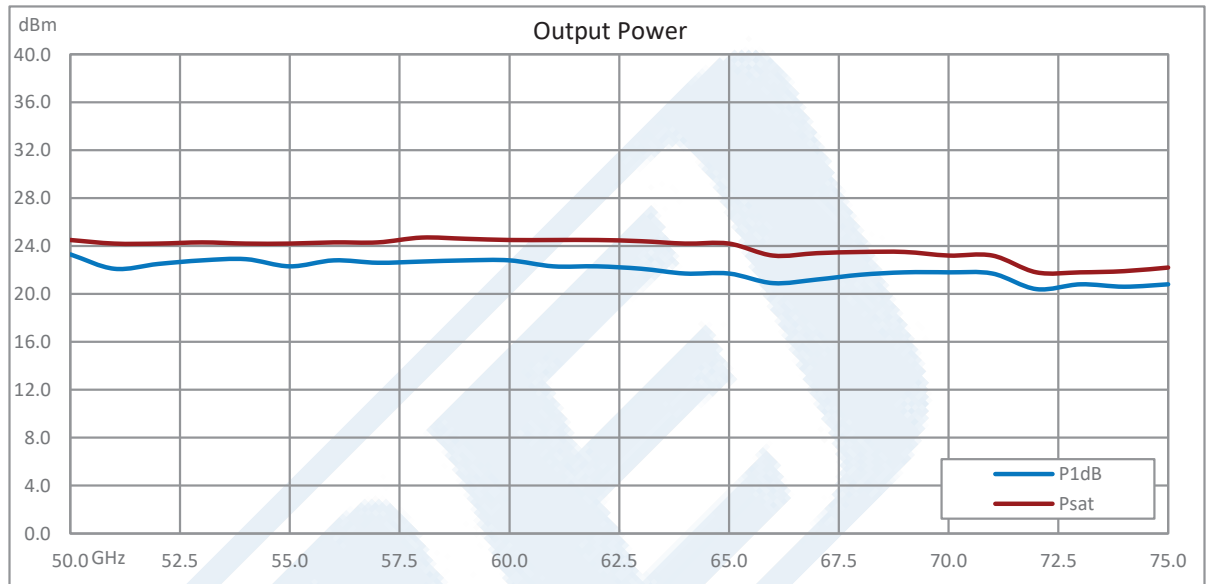

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-15 Waveguide Power Amplifier, V Band, 50 GHz to 75 GHz, 34 dB Gain, 24 dBm Psat, UG-385/U Flange PEWGA3219](#)



WR-15 Waveguide Power Amplifier, V Band, 50 GHz to 75 GHz, 34 dB Gain, 24 dBm Psat, UG-385/U Flange

Waveguide Power Amplifiers - PEWGA3219

WR-15 Waveguide Power Amplifier, V Band, 50 GHz to 75 GHz, 34 dB Gain, 24 dBm Psat, UG-385/U Flange from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-15 Waveguide Power Amplifier, V Band, 50 GHz to 75 GHz, 34 dB Gain, 24 dBm Psat, UG-385/U Flange PEWGA3219](https://www.pasternack.com/waveguide-power-amplifier-v-band-50-ghz-to-75-ghz-34-dB-gain-24-dBm-psat-UG-385/U-flange-PEWGA3219)

URL: <https://www.pasternack.com/waveguide-power-amplifier-v-band-75-ghz-25-dBm-psat-pewga3219-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PEWGA3219 CAD Drawing

WR-15 Waveguide Power Amplifier, V Band, 50 GHz to 75 GHz,
34 dB Gain, 24 dBm Psat, UG-385/U Flange

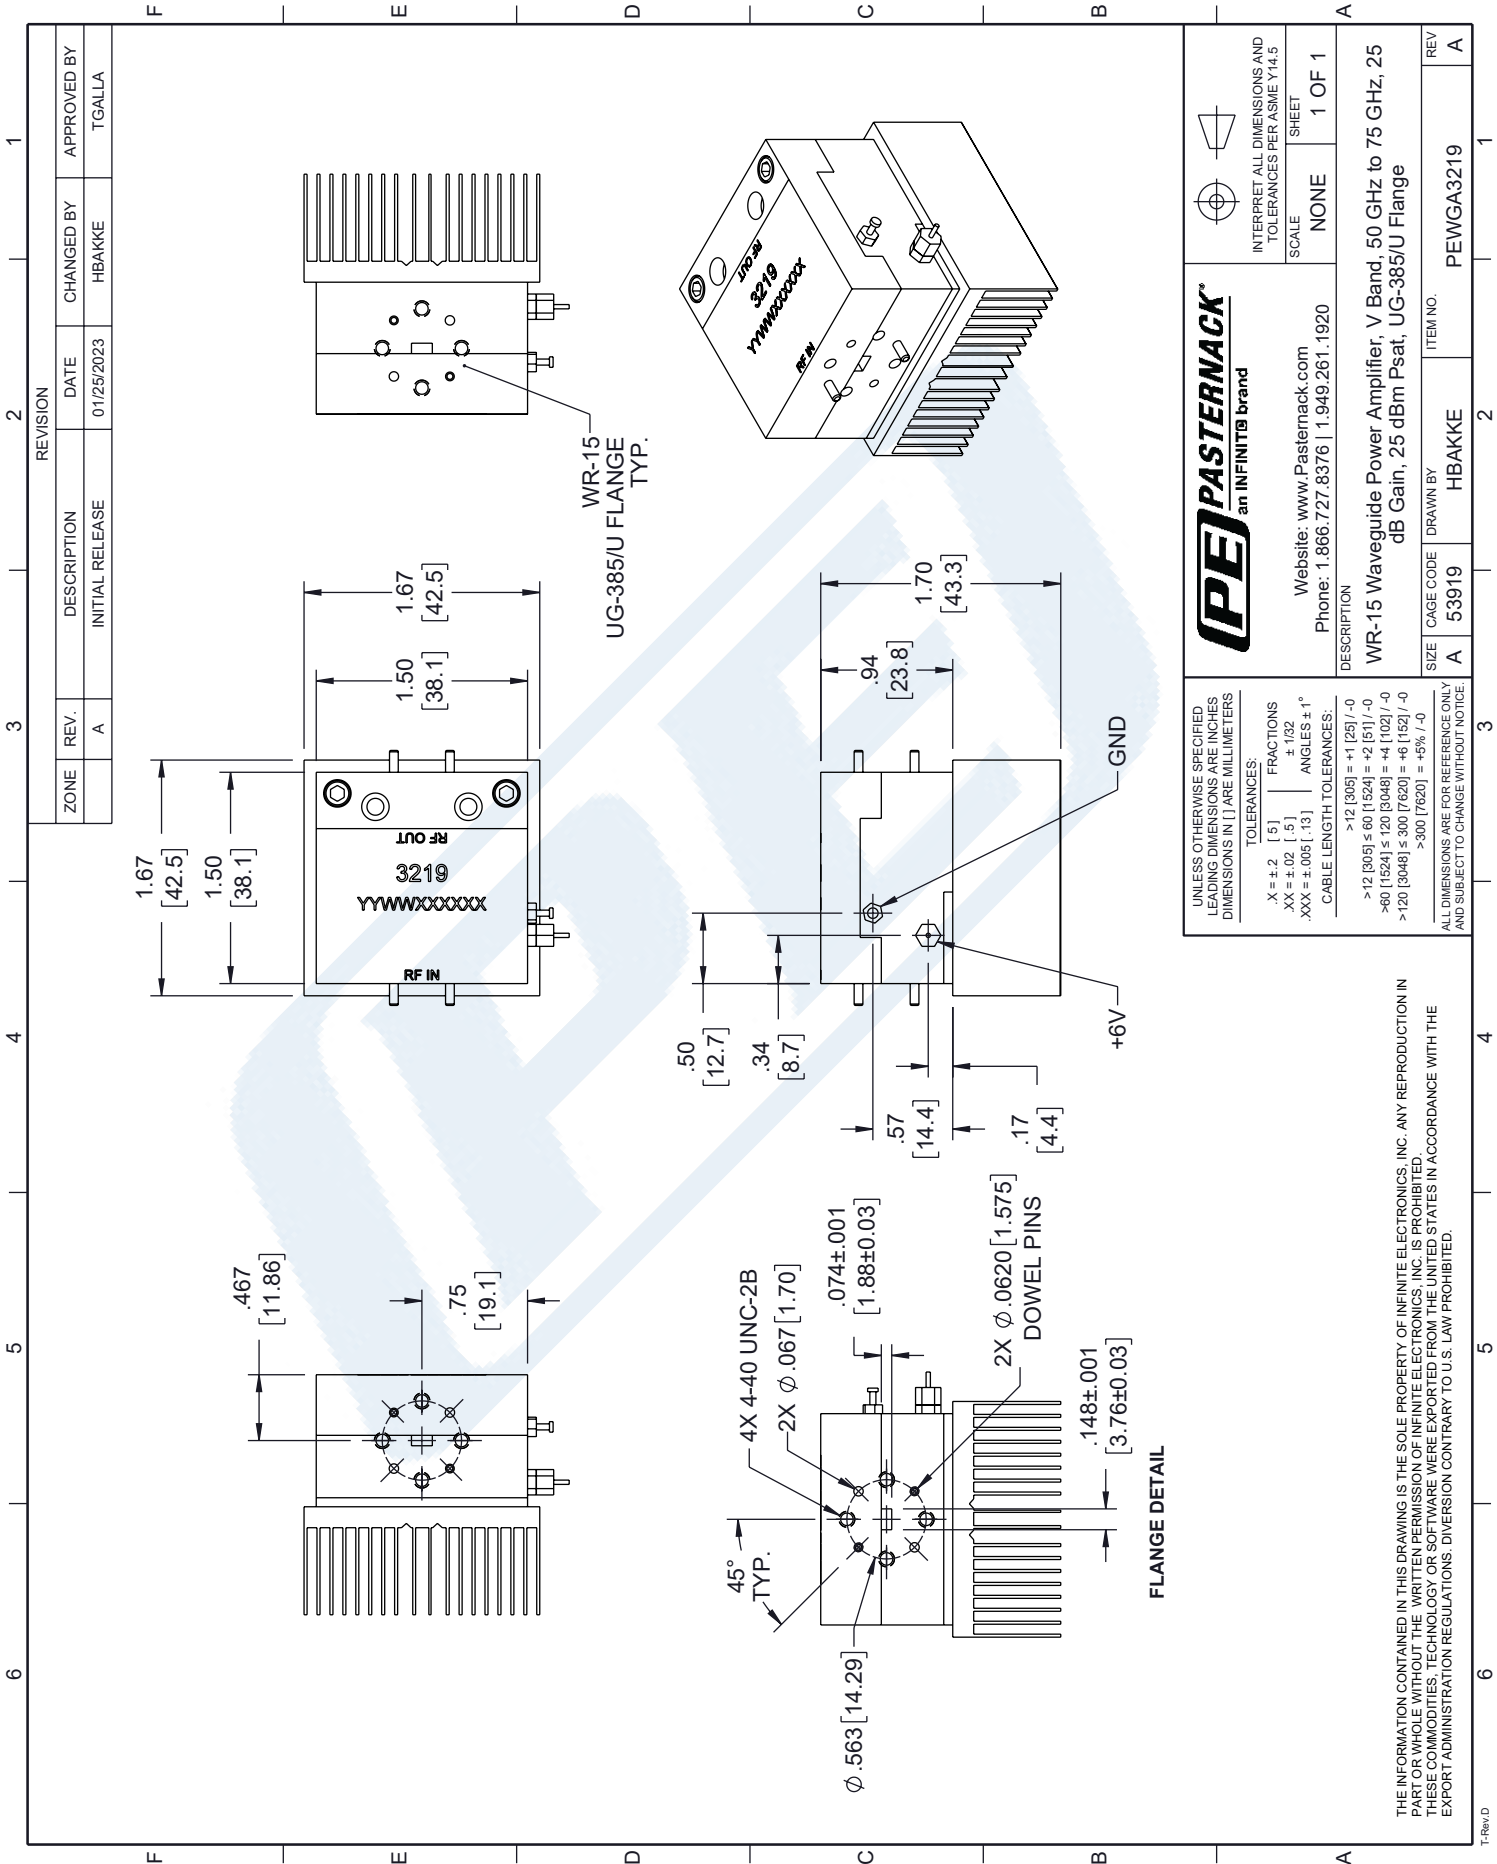

PE PASTERNAK
an INFINITI® brand

Website: www.Pasternack.com
 Phone: 1.866.727.8376 | 1.949.261.1920

INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE NONE SHEET 1 OF 1

DESCRIPTION
 WR-15 Waveguide Power Amplifier, V Band, 50 GHz to 75 GHz, 25 dB Gain, 24 dBm Psat, UG-385/U Flange

SIZE A CAGE CODE 53919 DRAWN BY HBAKKE ITEM NO. PEWGA3219 REV A

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.