



Dual Directional 40 dB SMA Coupler From
100 MHz to 500 MHz Rated To 200 Watts

TECHNICAL DATA SHEET

PE2CP1009

Configuration

Connector 1	SMA Female
Connector 2	SMA Female
Coupled Connectors	SMA Female
Design	Dual Directional Coupler

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	100		500	MHz
Directivity	20			dB
Impedance		50		Ohms
Insertion Loss			0.25	dB
Input Power			200	Watts
Input VSWR			1.2:1	
Coupling Value		40		dB
Coupling Tolerance			± 1	dB
Coupling Flatness			±0.3	dB

Mechanical Specifications

Temperature

Operating Range +80 to -55 deg C

Size

Length 2.5 in [63.5 mm]
Width/Dia. 0.57 in [14.48 mm]
Height 1.5 in [38.1 mm]

Housing Material and Plating Aluminum Alloy, Chem Film

Connectors

Description	Connector 1	Connector 2	Coupled Connectors
Type	SMA Female	SMA Female	SMA Female

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Dual Directional 40 dB SMA Coupler From 100 MHz to 500 MHz Rated To 200 Watts PE2CP1009](#)



Dual Directional 40 dB SMA Coupler From 100 MHz to 500 MHz Rated To 200 Watts

TECHNICAL DATA SHEET

PE2CP1009

Dual Directional 40 dB SMA Coupler From 100 MHz to 500 MHz Rated To 200 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Dual Directional 40 dB SMA Coupler From 100 MHz to 500 MHz Rated To 200 Watts PE2CP1009](http://www.pasternack.com/dual-directional-40-db-sma-coupler-100-500-mhz-200-watts-pe2cp1009-p.aspx)

URL: <http://www.pasternack.com/dual-directional-40-db-sma-coupler-100-500-mhz-200-watts-pe2cp1009-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE2CP1009 CAD Drawing

Dual Directional 40 dB SMA Coupler From 100 MHz to 500 MHz Rated To 200 Watts

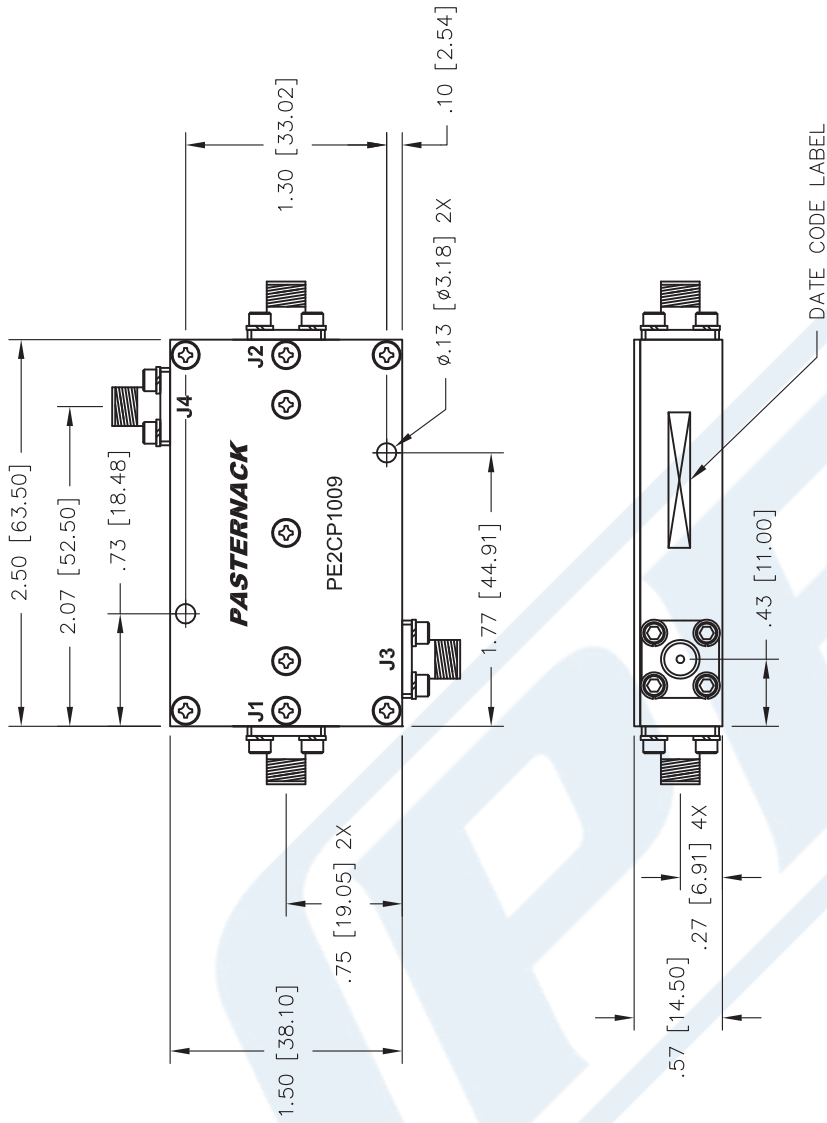

TOLERANCE	.XX \pm .02
	.XXX \pm .005
	ANG. \pm 1/2°

* THESE DIMENSIONS AND TOLERANCES SUPERSEDE NOTE #1 ON TITLE BLOCK.

INPUT	OUTPUT	FORWARD COUPLING	REFLECTED COUPLING
J1	J2	J3	J4
J2	J1	J4	J3

DWG TITLE

PE2CP1009

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

PE PASTERNAK®
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 041015

SCALE N/A

SIZE A

2233