

NEARFI P 2A B - Inductive coupler



1234226

<https://www.phoenixcontact.com/us/products/1234226>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



NearFi, base coupler for contactless power transmission in the centimeter range, 24 V DC, 2 A, M12 connection technology, IP65 type of protection. A remote coupler is required for operation.

Product description

With the robust NEARFI-P... NearFi couplers, you can transmit power (24 V DC / 2 A) without contact across a distance in the centimeter range. You can therefore replace wear-sensitive and maintenance-intensive connections and reduce downtimes in your systems.

Your advantages

- Contactless - and therefore no wear and no maintenance
- High power in a compact housing
- All-round visible diagnostics with light ring on the housing
- High degree of mounting freedom with flexible proximity options
- Plug and Play - as easy as a plug
- Degree of protection IP65

Commercial data

Item number	1234226
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN26
Product key	DNC692
GTIN	4063151337926
Weight per piece (including packing)	574 g
Weight per piece (excluding packing)	535 g
Customs tariff number	85176200
Country of origin	DE

NEARFI P 2A B - Inductive coupler



1234226

<https://www.phoenixcontact.com/us/products/1234226>

Technical data

Product properties

Product type	Inductive coupler
Application	Power
MTTF	331 Years (SN 29500 standard, temperature 25°C, operating cycle 21%)
	196 Years (SN 29500 standard, temperature 40°C, operating cycle 34.25%)
	98 Years (SN 29500 standard, temperature 40°C, operating cycle 100%)

Insulation characteristics

Overvoltage category	II
Pollution degree	1

Electrical properties

Maximum power dissipation for nominal condition	0.72 W
---	--------

Supply

Supply voltage range	19 V DC ... 30 V DC
Typical current consumption	30 mA (without remote coupler, at 24 V DC, at 25°C)
	125 mA (with remote coupler, without load, at 24 V DC, at 25°C)
Max. current consumption	≤ 3.2 A (with remote coupler, 2 A load, input voltage of 19 V DC)
Inrush current	≤ 0.8 A (8 ms at 24 V DC, without remote coupler)
	≤ 4.5 A (6 ms at 24 V DC, with remote coupler, without load)
Protective circuit	Transient protection, polarity protection

Input data

Digital

Description of the input	Digital input
Number of inputs	1
Voltage input signal	19 V DC ... 30 V DC
Switching level "1" signal	19 V DC ... 30 V DC

Output data

Signal

Output name	Digital output
Number of outputs	1
Voltage output signal	24 V DC

Connection data

Supply

Connection method	M12 connector (A-coded)
-------------------	-------------------------

NEARFI P 2A B - Inductive coupler



1234226


<https://www.phoenixcontact.com/us/products/1234226>

Interfaces

Inductive: Power transmission

Switch-on time	< 50 ms
Range	min. 0 mm
	typ. 10 mm (at 60 °C)
	typ. 12 mm (at 25 °C)
Frequency range	100 kHz ... 148.5 kHz (Power transmission)
Test field strength	~ 1.95 µA/m (within 10 m distance)

Dimensions

Dimensional drawing	
Width	80 mm
Height	86 mm
Depth	39 mm

Material specifications

Color (Housing)	black (RAL 9005)
Material (Enclosure)	PBT
	Die-cast zinc
Flammability rating according to UL 94	V0

Cable/line

Other resistance	Resistant to welding splashes
------------------	-------------------------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
Impact strength	IK06
Ambient temperature (operation)	-20 °C ... 60 °C (observe derating)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	2000 m
Permissible humidity (operation)	10 % ... 95 %
Permissible humidity (storage/transport)	10 % ... 95 %
Air pressure (operation)	80 kPa ... 108 kPa (up to 2000 m above sea level)
Air pressure (storage/transport)	66 kPa ... 108 kPa (up to 3500 m above sea level)

NEARFI P 2A B - Inductive coupler



1234226

<https://www.phoenixcontact.com/us/products/1234226>

Approvals

CE

Certificate	CE-compliant
-------------	--------------

Wireless approval, Europe

Note	RED 2014/53/EU
------	----------------

KC approval for South Korea

Certificate	R-R-PCK-1234232
-------------	-----------------

EMC data

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Conducted noise emission	EN 55032 Class A, industrial applications

Electrostatic discharge

Standards/regulations	EN 61000-4-2
-----------------------	--------------

Electrostatic discharge

Contact discharge	± 4 kV (Test Level 2)
Discharge in air	± 8 kV (Test Level 3)
Comments	Criterion B

Electromagnetic HF field

Standards/regulations	EN 61000-4-3
-----------------------	--------------

Electromagnetic HF field

Frequency range	80 MHz ... 1 GHz (Test Level 3)
Field intensity	10 V/m
Comments	Criterion A

Fast transients (burst)

Standards/regulations	EN 61000-4-4
-----------------------	--------------

Fast transients (burst)

Input	± 2 kV (Test Level 3 - asymmetrical)
Output	± 2 kV (Test Level 3 - asymmetrical)
Signal	± 2 kV (Test Level 3 - asymmetrical)
Comments	Criterion B

Surge current load (surge)

Standards/regulations	EN 61000-4-5
-----------------------	--------------

Surge current load (surge)

Input	± 0.5 kV (Test Level 1 - symmetrical)
	± 1 kV (Test Level 2 - asymmetrical)
Output	± 1 kV (Test Level 2 - asymmetrical)
Signal	± 1 kV (Test Level 2 - asymmetrical)

NEARFI P 2A B - Inductive coupler



1234226

<https://www.phoenixcontact.com/us/products/1234226>

Comments	Criterion B
Conducted interference	
Standards/regulations	EN 61000-4-6
Conducted interference	
Frequency range	0.15 MHz ... 80 MHz (Test Level 3 - asymmetrical)
Comments	Criterion A
Voltage	10 V (80% amplitude modulation with 1 kHz)
Emitted interference	
Standards/regulations	EN 55016-2-3
Comments	Class A, industrial applications
Criteria	
Criterion A	Normal operating behavior within the specified limits.
Criterion B	Temporary impairment to operational behavior that is corrected by the device itself.
Standards and regulations	
Free from substances that could impair the application of coating	Yes
Other resistance	Resistant to welding splashes
Standards/regulations	EN 60204-1 (PELV)
Standard designation	Protective extra-low voltage
Mounting	
Mounting type	Wall mounting
Assembly note	Observe derating
Mounting position	any

NEARFI P 2A B - Inductive coupler


1234226

<https://www.phoenixcontact.com/us/products/1234226>



Drawings

Schematic diagram

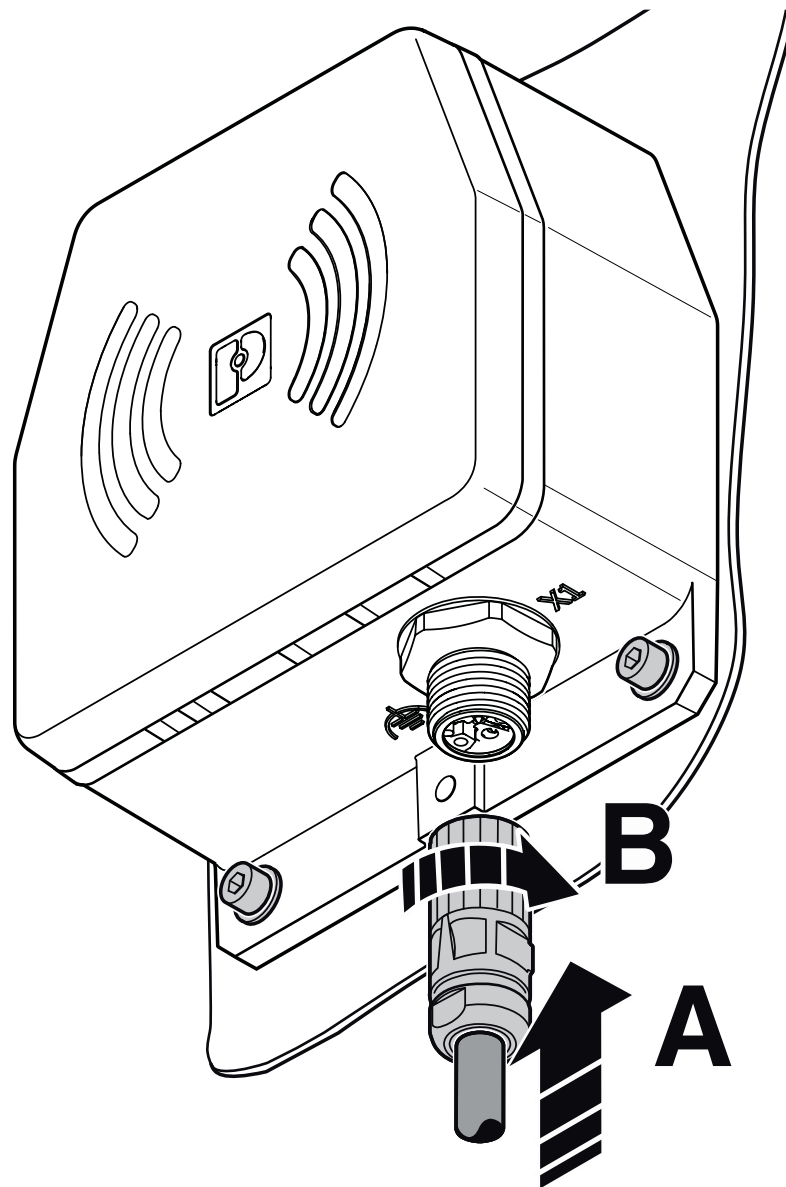

Connecting the cables


NEARFI P 2A B - Inductive coupler

1234226

<https://www.phoenixcontact.com/us/products/1234226>




Schematic diagram

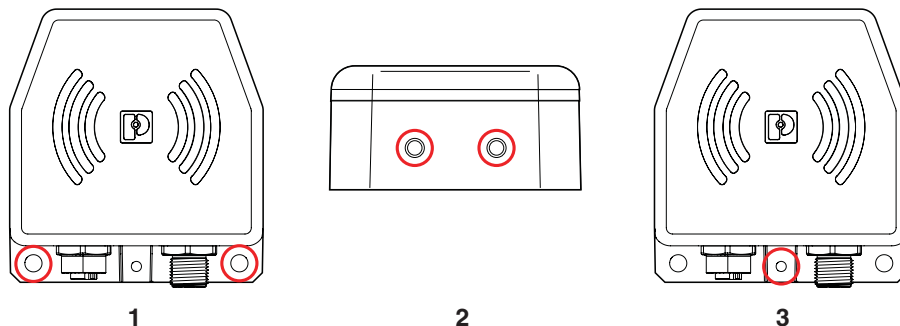

Options for functional grounding

Schematic diagram

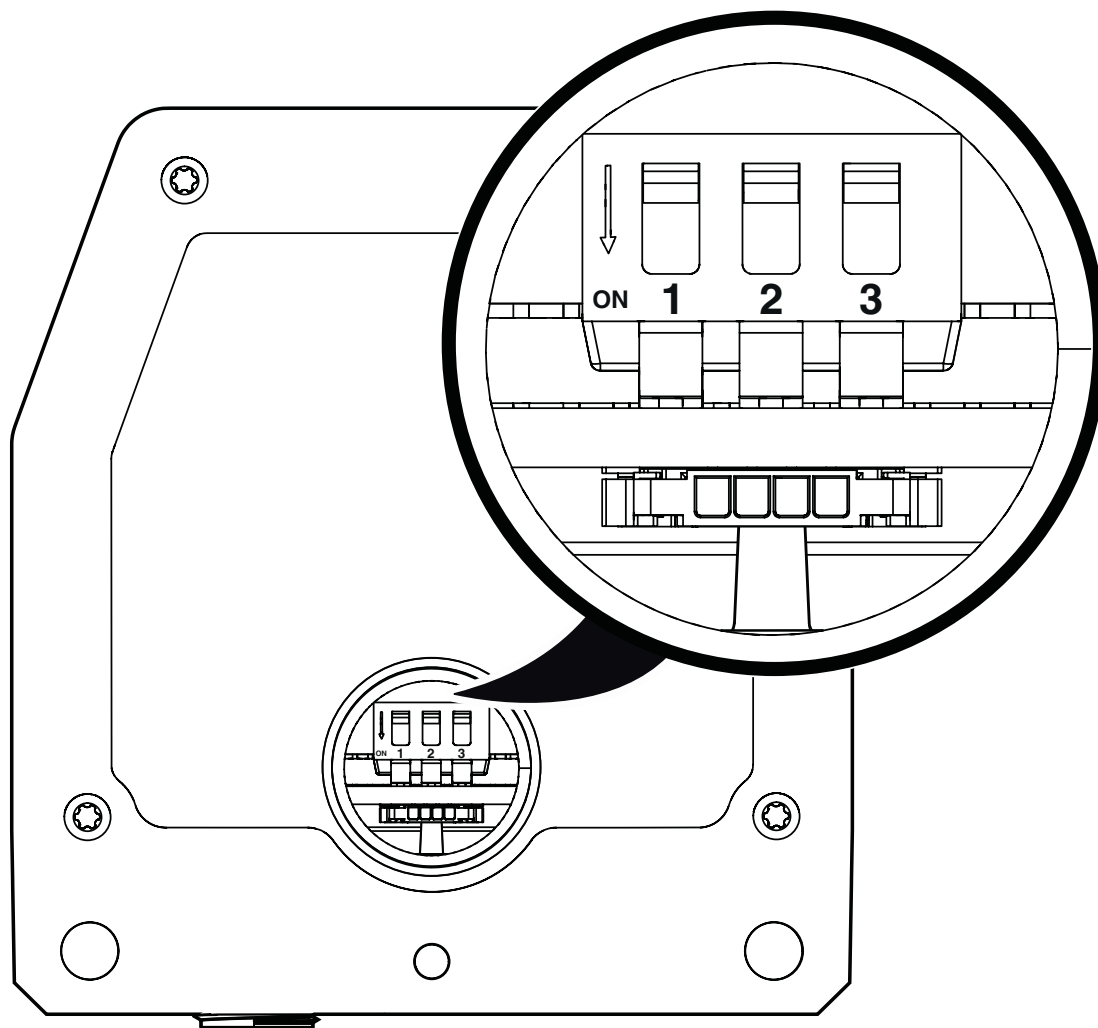

DIP switches


NEARFI P 2A B - Inductive coupler

1234226

<https://www.phoenixcontact.com/us/products/1234226>



Schematic diagram

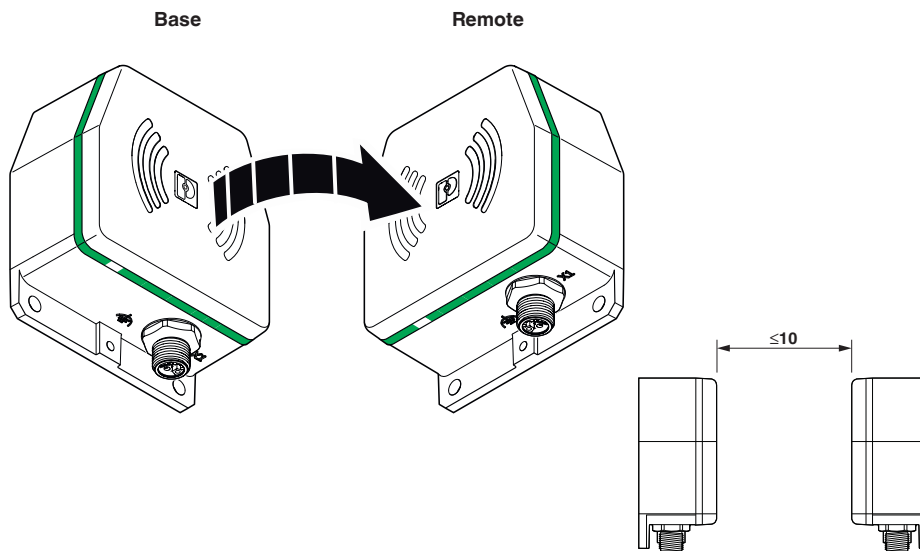


Method of operation

NEARFI P 2A B - Inductive coupler

1234226

<https://www.phoenixcontact.com/us/products/1234226>

Schematic diagram

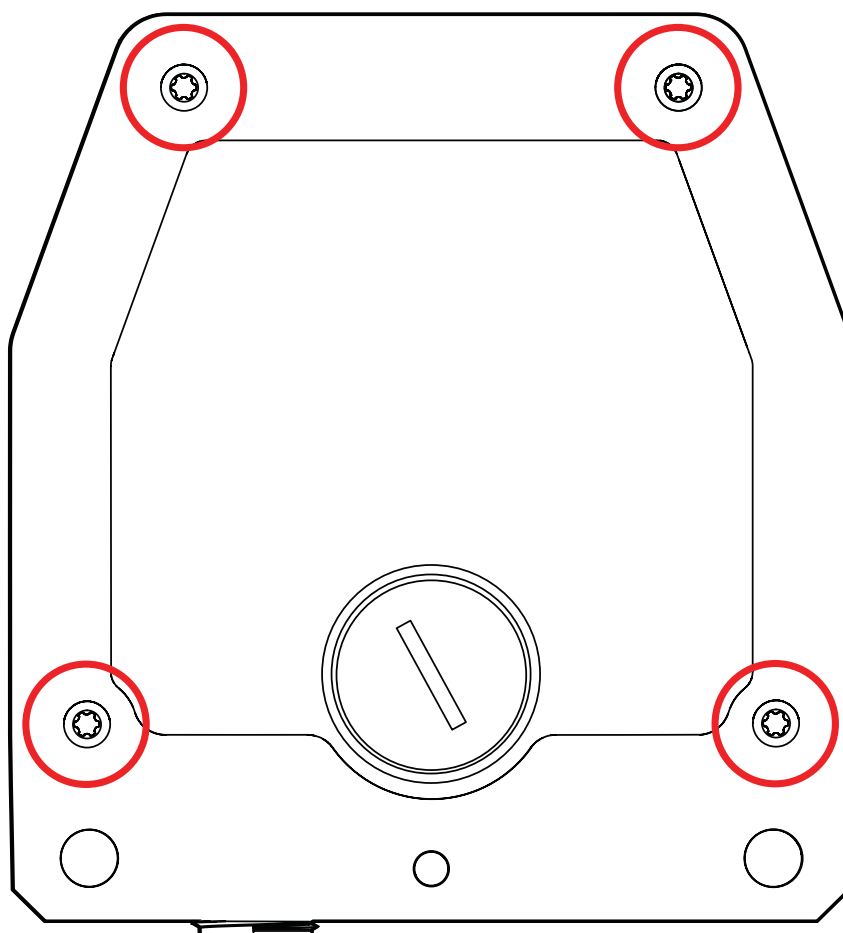

Mounting with four screws


NEARFI P 2A B - Inductive coupler

1234226

<https://www.phoenixcontact.com/us/products/1234226>




Drilling plan/solder pad geometry

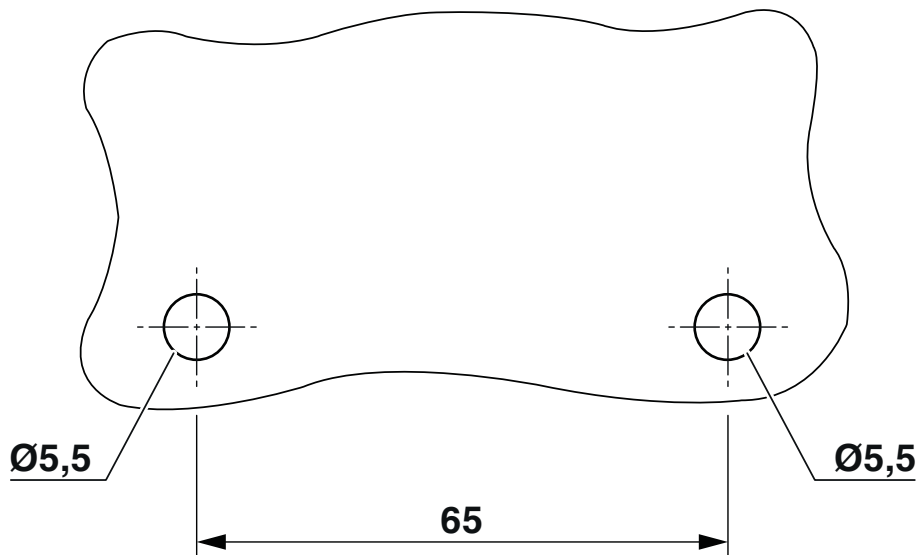

Drilling diagram

Schematic diagram

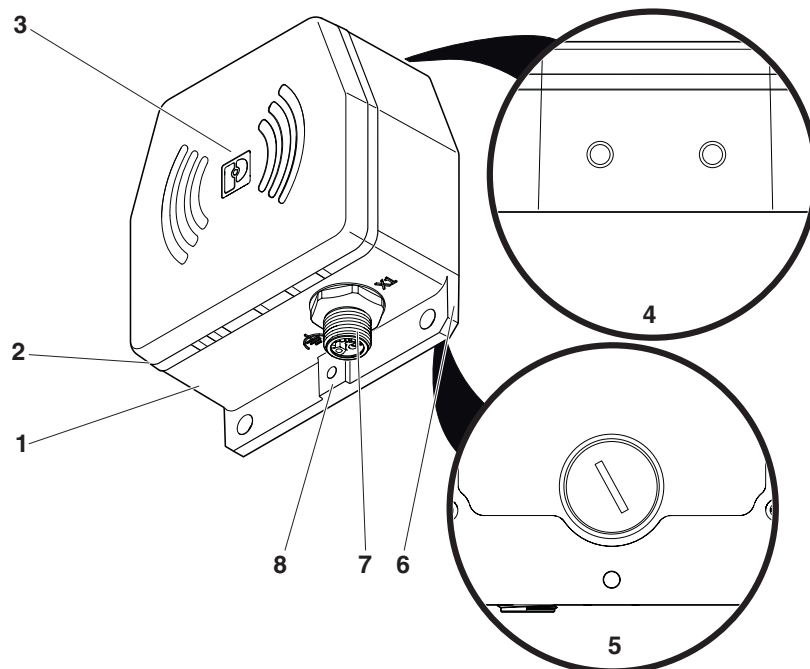


Function elements

NEARFI P 2A B - Inductive coupler

1234226

<https://www.phoenixcontact.com/us/products/1234226>

Block diagram

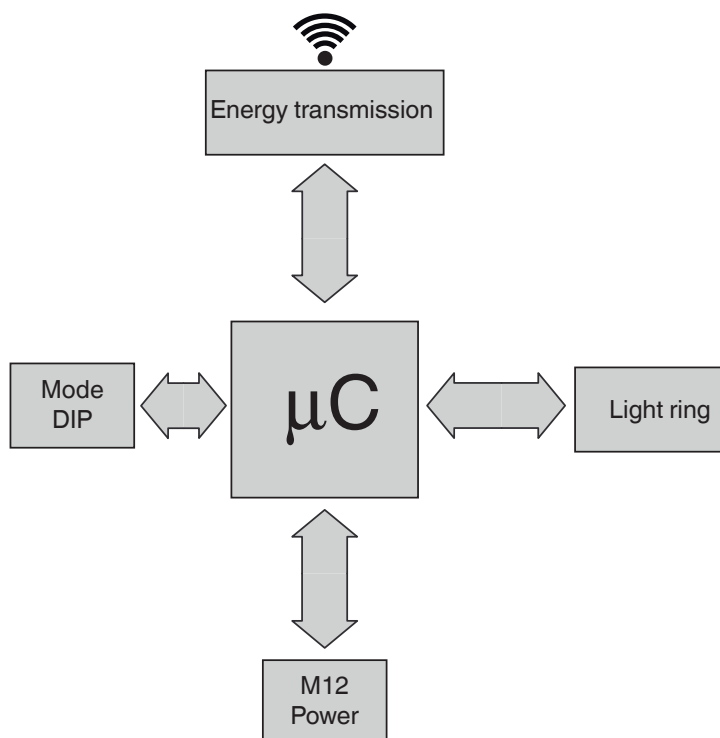

Basic circuit diagram


NEARFI P 2A B - Inductive coupler

1234226

<https://www.phoenixcontact.com/us/products/1234226>



Dimensional drawing

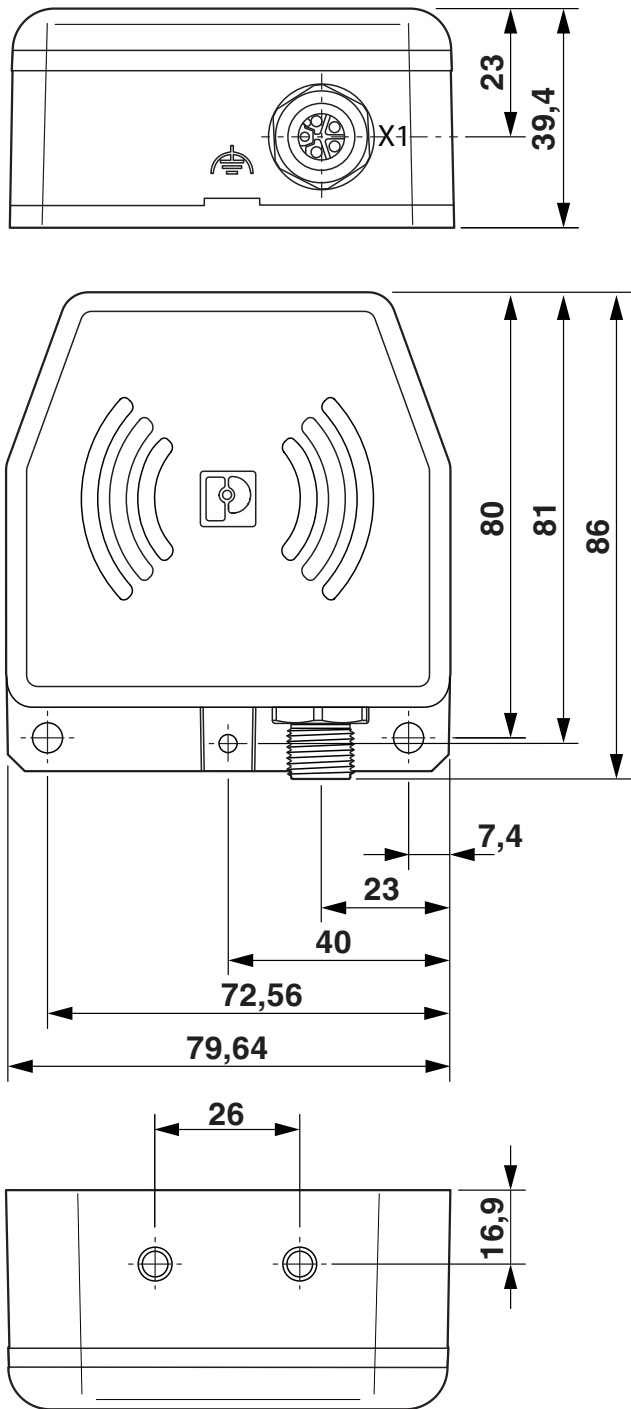


Dimensional drawing

NEARFI P 2A B - Inductive coupler

1234226

<https://www.phoenixcontact.com/us/products/1234226>

Schematic diagram

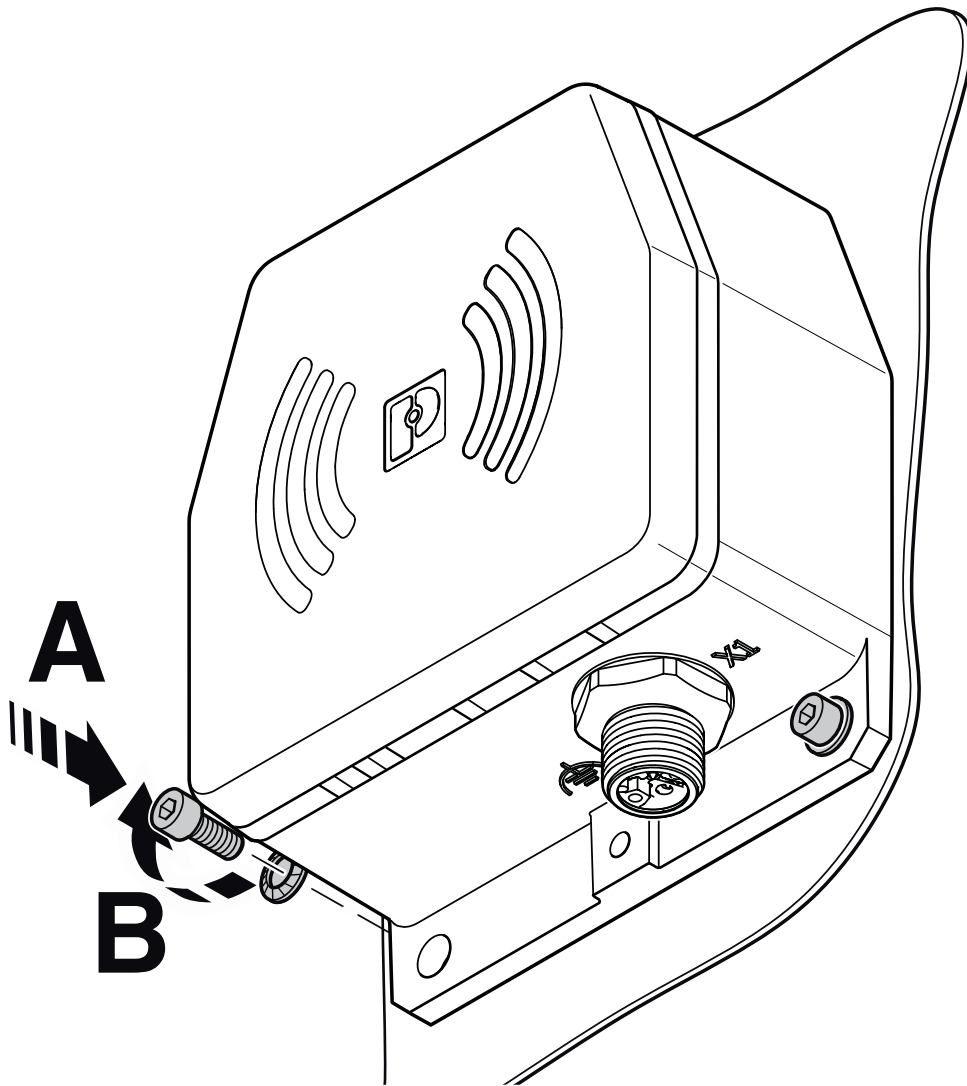


Mounting with two screws

NEARFI P 2A B - Inductive coupler




1234226

<https://www.phoenixcontact.com/us/products/1234226>

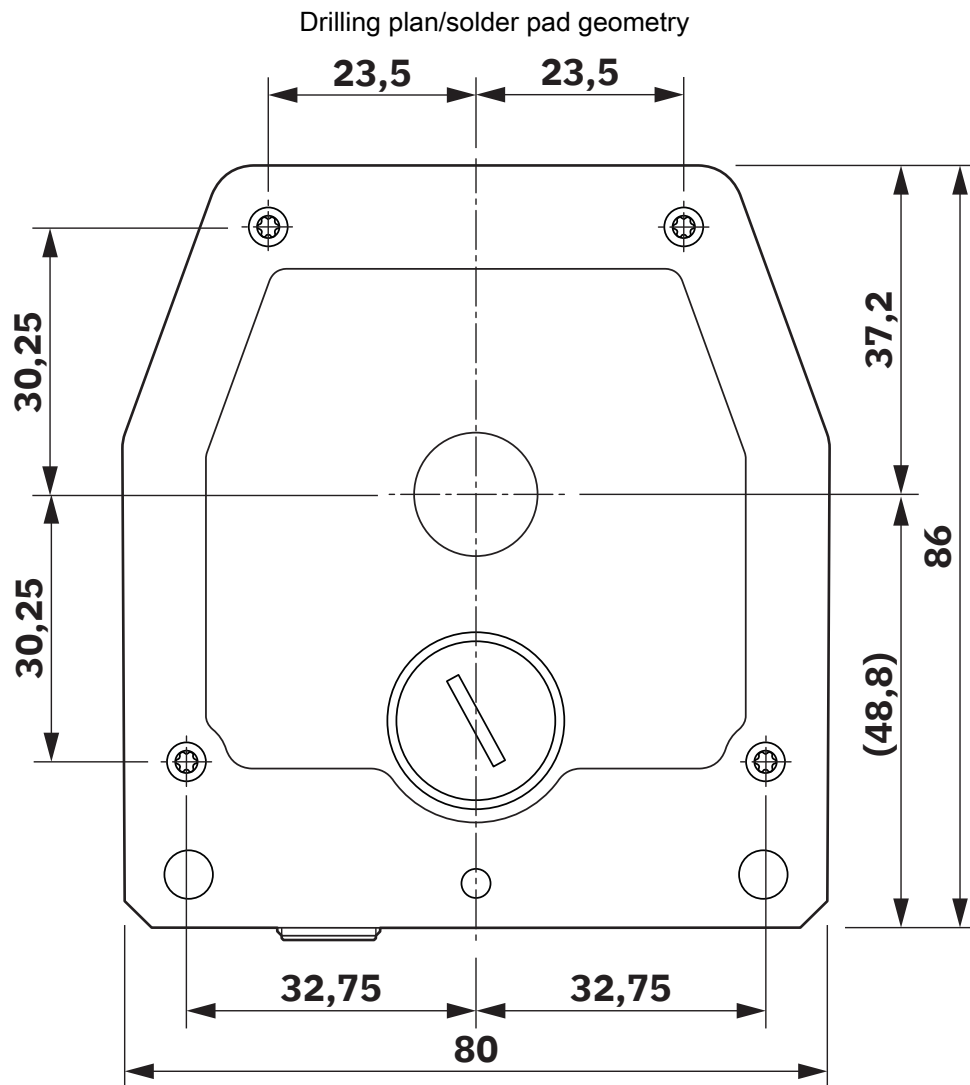

Centering template

Schematic diagram

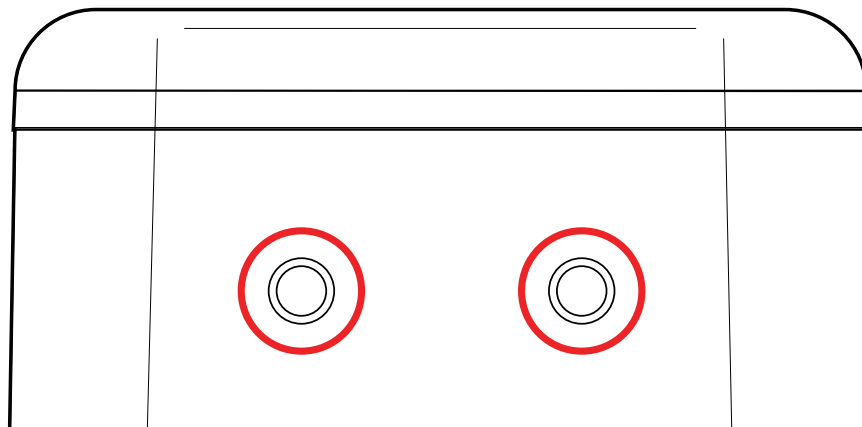

Mounting option

NEARFI P 2A B - Inductive coupler




1234226


<https://www.phoenixcontact.com/us/products/1234226>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1234226>



UL Listed
Approval ID: FILE E 238705



cUL Listed
Approval ID: FILE E 238705

cULus Listed

NEARFI P 2A B - Inductive coupler



1234226

<https://www.phoenixcontact.com/us/products/1234226>

Classifications

ECLASS

ECLASS-11.0	27040701
ECLASS-12.0	27040701
ECLASS-13.0	27040701

ETIM

ETIM 9.0	EC002540
----------	----------

UNSPSC

UNSPSC 21.0	39121000
-------------	----------

NEARFI P 2A B - Inductive coupler



1234226

<https://www.phoenixcontact.com/us/products/1234226>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)

NEARFI P 2A B - Inductive coupler

1234226

<https://www.phoenixcontact.com/us/products/1234226>



Mandatory accessories

NEARFI P 2A R - Inductive coupler

1234229

<https://www.phoenixcontact.com/us/products/1234229>




NearFi, remote coupler for contactless power transmission in the centimeter range, 24 V DC, 2 A, M12 connection technology, IP65 type of protection. A base coupler is required for operation.

Accessories

SAC-5P- 2,0-186/FS SCO - Sensor/actuator cable

1518368

<https://www.phoenixcontact.com/us/products/1518368>



Sensor/actuator cable, 5-position, PUR, black-gray RAL 7021, free cable end, on Socket straight M12 SPEEDCON, coding: A, cable length: 2 m

NEARFI P 2A B - Inductive coupler

1234226

<https://www.phoenixcontact.com/us/products/1234226>



SAC-5P- 5,0-186/FS SCO - Sensor/actuator cable

1518371

<https://www.phoenixcontact.com/us/products/1518371>




Sensor/actuator cable, 5-position, PUR, black-gray RAL 7021, free cable end, on Socket straight M12 SPEEDCON, coding: A, cable length: 5 m

SAC-5P-10,0-186/FS SCO - Sensor/actuator cable

1518384

<https://www.phoenixcontact.com/us/products/1518384>



Sensor/actuator cable, 5-position, PUR, black-gray RAL 7021, free cable end, on Socket straight M12 SPEEDCON, coding: A, cable length: 10 m

NEARFI P 2A B - Inductive coupler

1234226

<https://www.phoenixcontact.com/us/products/1234226>



SAC-5P-15,0-186/FS SCO - Sensor/actuator cable

1518397

<https://www.phoenixcontact.com/us/products/1518397>



Sensor/actuator cable, 5-position, PUR, black-gray RAL 7021, free cable end, on Socket straight M12 SPEEDCON, coding: A, cable length: 15 m

SAC-5P-MS/ 1,0-186/FS SCO - Sensor/actuator cable

1518423

<https://www.phoenixcontact.com/us/products/1518423>



Sensor/actuator cable, 5-position, PUR, black-gray RAL 7021, Plug straight M12 SPEEDCON, coding: A, on Socket straight M12 SPEEDCON, coding: A, cable length: 1 m

NEARFI P 2A B - Inductive coupler

1234226

<https://www.phoenixcontact.com/us/products/1234226>



SAC-5P-MS/ 2,0-186/FS SCO - Sensor/actuator cable

1518436

<https://www.phoenixcontact.com/us/products/1518436>



Sensor/actuator cable, 5-position, PUR, black-gray RAL 7021, Plug straight M12 SPEEDCON, coding: A, on Socket straight M12 SPEEDCON, coding: A, cable length: 2 m

SAC-5P-MS/ 5,0-186/FS SCO - Sensor/actuator cable

1518449

<https://www.phoenixcontact.com/us/products/1518449>



Sensor/actuator cable, 5-position, PUR, black-gray RAL 7021, Plug straight M12 SPEEDCON, coding: A, on Socket straight M12 SPEEDCON, coding: A, cable length: 5 m

NEARFI P 2A B - Inductive coupler

1234226

<https://www.phoenixcontact.com/us/products/1234226>



SAC-5P-MS/10,0-186/FS SCO - Sensor/actuator cable

1518452

<https://www.phoenixcontact.com/us/products/1518452>



Sensor/actuator cable, 5-position, PUR, black-gray RAL 7021, Plug straight M12 SPEEDCON, coding: A, on Socket straight M12 SPEEDCON, coding: A, cable length: 10 m

SAC-5P-MS/15,0-186/FS SCO - Sensor/actuator cable

1518465

<https://www.phoenixcontact.com/us/products/1518465>



Sensor/actuator cable, 5-position, PUR, black-gray RAL 7021, Plug straight M12 SPEEDCON, coding: A, on Socket straight M12 SPEEDCON, coding: A, cable length: 15 m

NEARFI P 2A B - Inductive coupler

1234226

<https://www.phoenixcontact.com/us/products/1234226>



SACC-M12FS-5CON-PG9-M - Connector

1681486

<https://www.phoenixcontact.com/us/products/1681486>



Connector, Universal, 5-position, Socket straight M12, coding: A, Screw connection, knurl material: Zinc die-cast, nickel-plated, cable gland Pg9, external cable diameter 6 mm ... 8 mm

SACC-M12FR-5CON-PG9-M - Connector

1681499

<https://www.phoenixcontact.com/us/products/1681499>



Connector, Universal, 5-position, Socket angled M12, coding: A, Screw connection, knurl material: Zinc die-cast, nickel-plated, cable gland Pg9, external cable diameter 6 mm ... 8 mm

NEARFI P 2A B - Inductive coupler

1234226

<https://www.phoenixcontact.com/us/products/1234226>



PROT-M12 FS - Sealing cap

1560251

<https://www.phoenixcontact.com/us/products/1560251>



M12 sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com