

Article No. : 6SL3220-1YC28-1UF0



Figure similar

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :

### Rated data

#### Input

Number of phases	3 AC	
Line voltage	200 ... 240 V +10 % -20 %	
Line frequency	47 ... 63 Hz	
<b>Rated voltage</b>	<b>200V IEC</b>	<b>240V NEC</b>
Rated current (LO)	51.00 A	51.00 A
Rated current (HO)	40.00 A	40.00 A

#### Output

Number of phases	3 AC	
<b>Rated voltage</b>	<b>200V IEC</b>	<b>240V NEC <sup>1)</sup></b>
Rated power (LO)	15.00 kW	20.00 hp
Rated power (HO)	11.00 kW	15.00 hp
Rated current (LO)	54.00 A	54.00 A
Rated current (HO)	42.00 A	42.00 A
Rated current (IN)	56.00 A	
Max. output current	73.00 A	
Pulse frequency	4 kHz	
Output frequency for vector control	0 ... 200 Hz	
Output frequency for V/f control	0 ... 550 Hz	

#### Overload capability

Low Overload (LO)  
110% base load current IL for 60 s in a 300 s cycle time

High Overload (HO)  
150% x base load current IH for 60 s within a 600 s cycle time

### General tech. specifications

Power factor $\lambda$	0.90 ... 0.95
Offset factor $\cos \phi$	0.99
Efficiency $\eta$	0.97
Sound pressure level (1m)	70 dB
Power loss <sup>3)</sup>	0.626 kW
Filter class (integrated)	Unfiltered
EMC category (with accessories)	without
Safety function "Safe Torque Off"	without SIRIUS device (e.g. via S7-1500F)

### Communication

Communication PROFINET, EtherNet/IP

### Inputs / outputs

#### Standard digital inputs

Number	6
Switching level: 0 → 1	11 V
Switching level: 1 → 0	5 V
Max. inrush current	15 mA

#### Fail-safe digital inputs

Number	1
--------	---

#### Digital outputs

Number as relay changeover contact	2
Output (resistive load)	DC 30 V, 5.0 A
Number as transistor	0

#### Analog / digital inputs

Number	2 (Differential input)
Resolution	10 bit

#### Switching threshold as digital input

0 → 1	4 V
1 → 0	1.6 V

#### Analog outputs

Number	1 (Non-isolated output)
--------	-------------------------

#### PTC/ KTY interface

1 motor temperature sensor input, sensors that can be connected PTC, KTY and Thermo-Click, accuracy  $\pm 5$  °C

### Closed-loop control techniques

V/f linear / square-law / parameterizable	Yes
V/f with flux current control (FCC)	Yes
V/f ECO linear / square-law	Yes
Sensorless vector control	Yes
Vector control, with sensor	No
Encoderless torque control	No
Torque control, with encoder	No

## Data sheet for SINAMICS G120X


Article No. : 6SL3220-1YC28-1UF0

Ambient conditions	
Standard board coating type	Class 3C2, according to IEC 60721-3-3: 2002
Cooling	Air cooling using an integrated fan
Cooling air requirement	0.055 m <sup>3</sup> /s (1.942 ft <sup>3</sup> /s)
Installation altitude	1,000 m (3,280.84 ft)
Ambient temperature	
Operation	-20 ... 45 °C (-4 ... 113 °F)
Transport	-40 ... 70 °C (-40 ... 158 °F)
Storage	-25 ... 55 °C (-13 ... 131 °F)
Relative humidity	
Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible

Connections	
Signal cable	
Conductor cross-section	0.15 ... 1.50 mm <sup>2</sup> (AWG 24 ... AWG 16)
Line side	
Version	screw-type terminal
Conductor cross-section	10.00 ... 35.00 mm <sup>2</sup> (AWG 8 ... AWG 2)
Motor end	
Version	Screw-type terminals
Conductor cross-section	10.00 ... 35.00 mm <sup>2</sup> (AWG 8 ... AWG 2)
DC link (for braking resistor)	
PE connection	Screw-type terminals
Max. motor cable length	
Shielded	200 m (656.17 ft)
Unshielded	300 m (984.25 ft)

Mechanical data	
Degree of protection	IP20 / UL open type
Frame size	FSD
Net weight	16.6 kg (36.60 lb)
Dimensions	
Width	200 mm (7.87 in)
Height	472 mm (18.58 in)
Depth	248 mm (9.76 in)
Standards	
Compliance with standards	UL, cUL, CE, C-Tick (RCM), EAC, KCC, SEMI F47, REACH
CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC

Converter losses to IEC61800-9-2*	
Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	55.2 %

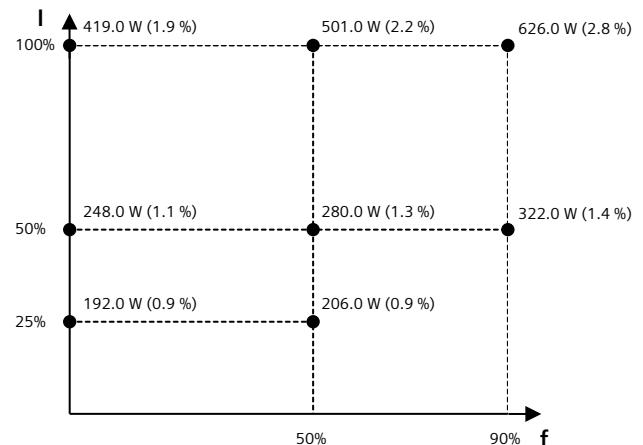

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

\*converted values

<sup>1)</sup>The output current and HP ratings are valid for the voltage range 220V-240V

<sup>3)</sup>Typical value. More information can be found in the element group "Converter losses to IEC 61800-9-2" in this datasheet.

## Data sheet for SINAMICS G120X

Article No. : 6SL3220-1YC28-1UF0

### I/O Extension Module

#### Inputs / outputs

##### Digital inputs

Number of digital inputs <sup>1)</sup>	2
Conductor cross-section	0.5 ... 1.5 mm <sup>2</sup> (AWG 21 ... AWG 16) Alternatively 2 x 0.5 mm <sup>2</sup>
Input voltage (0→1)	11 V
Input voltage (1→0)	5 V
Input voltage, max.	30 V

##### Digital outputs

Number of digital outputs	4
Conductor cross-section	1.5 mm <sup>2</sup> (AWG 16)
Output current <sup>2)</sup>	2 A

##### Analog inputs

Number of analog inputs <sup>3)</sup>	2
Conductor cross-section	0.5 ... 1.5 mm <sup>2</sup> (AWG 21 ... AWG 16) alternatively 2*0.5 mm <sup>2</sup>
Current	0 ... 20 mA

##### Analog outputs

Number of analog outputs	2
Type of analog outputs <sup>4)</sup>	Non-isolated output
Conductor cross-section	0.5 ... 1.5 mm <sup>2</sup> (AWG 21 ... AWG 16) Alternatively 2 x 0.5 mm <sup>2</sup>
Output voltage	0 ... 10 V
Output current	0 ... 20 mA

#### Mechanical data

##### Dimensions

Width	71 mm (2.80 in)
Height	117 mm (4.61 in)
Depth	27 mm (1.06 in)

<sup>1)</sup>DI 6: digital input; DI 7: P or M switch; DI COM: Input for Control Unit interface (24 V out, max. 250 mA)

<sup>2)</sup>The max. current depends on the temperature and the size of the connected converted. It varies between 2 A and 3 A at 30 V DC.

<sup>3)</sup>2 analog inputs for the connection of Pt1000/Ni1000 temperature sensors. One of which can be optionally used as analog input.

<sup>4)</sup>Switchable between voltage (0 ... 10 V) and current (0 ... 20 mA) using a parameter