

PCB terminal block; lever; 6 mm²; Pin spacing 12.5 mm; 3-pole; Push-in

CAGE CLAMP®; 6,00 mm²; gray

www.wago.com/2606-1353



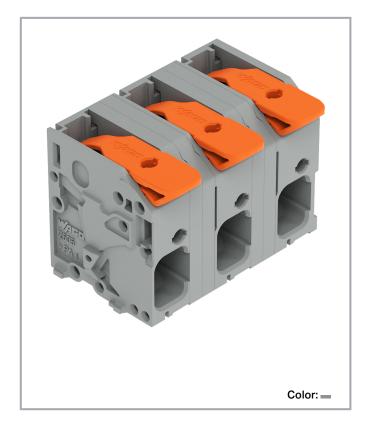

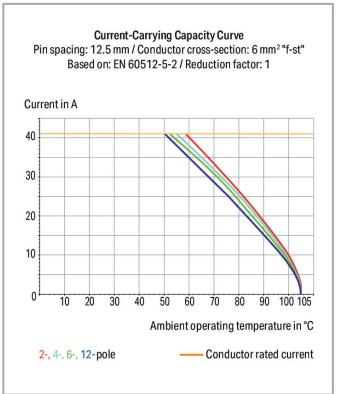


 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com

www.wago.com/2606-1353



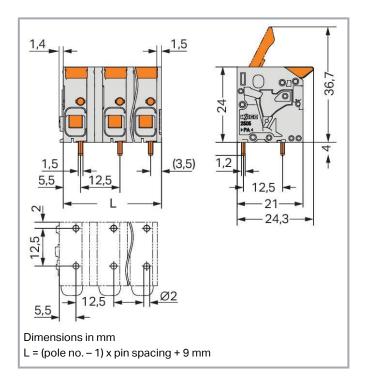

# Item description

- PCB terminal blocks with Push-in CAGE CLAMP® connection and levers
- Push-in termination of solid and ferruled conductors
- Intuitive and tool-free operation
- Several clamping units can be held open simultaneously, simplifying the connection of multi-core cables
- Testing can be performed both parallel and perpendicular to conductor entry

# Data Notes

Variants:

Other pole numbers Direct marking

Other colors

Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/.

## **Electrical data**

## Ratings per IEC/EN

Ratings per

IEC/EN 60664-1

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/2606-1353



Nominal voltage (III/3)	800 V
Rated impulse voltage (III/3)	8 kV
Rated voltage (III/2)	1000 V
Rated impulse voltage (III/2)	8 kV
Nominal voltage (II/2)	1000 V
Rated surge voltage (II/2)	8 kV
Rated current	41 A
Legend (ratings)	(III / 2) ≙ Overvoltage category III / Pollution degree 2

# Ratings per UL

Approvals per	UL 1059
Rated voltage UL (Use Group B)	600 V
Rated current UL (Use Group B)	42 A
Rated voltage UL (Use Group C)	600 V
Rated current UL (Use Group C)	42 A

# Ratings per CSA

Approvals per	CSA
Rated voltage CSA (Use Group B)	600 V
Rated current CSA (Use Group B)	31 A
Rated voltage CSA (Use Group C)	600 V
Rated current CSA (Use Group C)	31 A

## Connection data

Connection points	3
Total number of potentials	3
Number of connection types	1
Number of levels	1

## Connection 1

Connection technology	Push-in CAGE CLAMP®
Actuation type	Lever
Solid conductor	0.2 10 mm² / 24 8 AWG
Fine-stranded conductor	0.2 10 mm² / 24 8 AWG
Fine-stranded conductor; with insulated ferrule	0.25 6 mm²
Fine-stranded conductor; with uninsulated ferrule	0.25 6 mm²

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/2606-1353



Fine-stranded conductor; with twin ferrule	0.25 2.5 mm <sup>2</sup>
Strip length	11 13 mm / 0.43 0.51 inches
Conductor connection direction to PCB	0°
Pole number	3

# Physical data

Width       34.0 mm / 1.339 inches         Height       28 mm / 1.102 inches         Height from the surface       24 mm / 0.945 inches         Solder pin length       4 mm         Solder pin dimensions       1.5 x 1.2 mm         Drilled hole diameter with tolerance       2 < sup>(+0.1)	Pin spacing	12.5 mm / 0.492 inches
Height from the surface 24 mm / 0.945 inches  Solder pin length 4 mm  Solder pin dimensions 1.5 x 1.2 mm	Width	34.0 mm / 1.339 inches
Solder pin length 4 mm Solder pin dimensions 1.5 x 1.2 mm	Height	28 mm / 1.102 inches
Solder pin dimensions 1.5 x 1.2 mm	Height from the surface	24 mm / 0.945 inches
	Solder pin length	4 mm
Drilled hole diameter with tolerance 2 < sup>(+0.1) mm	Solder pin dimensions	1.5 x 1.2 mm
	Drilled hole diameter with tolerance	2 <sup>(+0.1)</sup> mm

### **PCB** contact

PCB contact	ТНТ
Solder pin arrangement	over the entire terminal strip (in-line)
Number of solder pins per potential	2

## Material data

Note (material data)	<pre>  <a href="https://www.wago.com/us/material-specifications" target="_blank">Information on material specifications can be found here</a> &gt; </pre>
Color	gray
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	VO
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E <sub>Cu</sub> )
Contact plating	Tin
Fire load	0.361 MJ
Actuator color	orange
Weight	15.3 g

# **Environmental requirements**

Limit temperature range	-60 +105 °C
Processing temperature	-35 +60 °C

 $\label{lem:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/2606-1353



Continuous operating temperature -60 ... +105 °C

### Commercial data

ETIM 8.0	EC002643
ETIM 7.0	EC002643
ECCN	NO DATA
PU (SPU)	58 pcs
Packaging type	box
Country of origin	DE
GTIN	4055143861984
Customs tariff number	85369010000

## **Environmental Product Compliance**

RoHS Compliance Status Compliant, No Exemption

## Approvals / Certificates

### General approvals

Logo	Approval	Additional Approval Text	Certificate name
	CB DEKRA Certification B.V.	IEC 60947-7-4	NL- 103311
	CSA CSA Group	C22.2	70146882
	UL	UL 1059	E45172



Underwriters Laboratories Inc.

# Optional accessories

-	
Ferrule	

Ferrule

Item no.: 216-108
Ferrule; Sleeve for 6 mm² / AWG 10; uninsulated; electro-tin plated; silver-colored

Item no.: 216-208
Ferrule; Sleeve for 6 mm² / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; www.wago.com/216-208 acc. to DIN 46228, Part 4/09.90; yellow

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/2606-1353



Item no.: 216-263 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red	www.wago.com/216-263
Item no.: 216-266 Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue	www.wago.com/216-266
Item no.: 216-264 Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black	www.wago.com/216-264
Item no.: 216-267 Ferrule; Sleeve for 4 mm² / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray	www.wago.com/216-267

## **Downloads**

### Documentation

#### **Additional Information**

Technical Section 2019 年4月3日 pdf Download Technical explanations 2.1 MB

### CAD/CAE-Data

## PCB Design

Symbol and Footprint via Ultra Librarian 2606-1353

URL Download

CAx data for your PCB design, consisting of "schematic symbols and PCB footprints", allow easy integration of the WAGO component into your development environment.

### Supported formats:

- Accel EDA 14 & 15
- Altair
- Altium 6 to current version
- Autodesk Fusion 360
- Cadence Allegro
- DesignSpark
- Eagle Libraries
- KiCad
- Mentor Graphics
- BoardStation
- Mentor Graphics Design Architect
- Mentor Graphics Design

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/2606-1353



URL

Download

- Expedition 99 and 2000
- OrCAD 9.X PCB and Capture
- PADS PowerPCB 3, 3.5, 4.X, and 5.X
- PADS PowerPCB and PowerLogic 3.0
- PCAD 2000, 2001, 2002, 2004, and 2006
- Pulsonix 8.5 or newer
- STL
- 3D STEP
- TARGET 3001!
- View Logic ViewDraw
- Quadcept
- Zuken CadStar 3 and 4
- Zuken CR-5000 and CR-8000
- Zuken eCADSTAR 2020 and 2021Zuken CR-5000 and CR-8000

PCB Component Libraries (EDA), PCB CAD Library Ultra Librarian

Symbol and Footprint via SamacSys 2606-1353

CAx data for your PCB design, consisting of "schematic symbols and PCB footprints", allow easy integration of the WAGO component into your development environment.

Supported formats:

- 3D (stp)
- Altium
- CADSTAR
- Capture
- CircuitStudio
- CR-5000
- CR-8000
- DEHDL
- DesignSpark PCB
- DesignSpark PCB PRO
- DipTrace
- EAGLE
- Easy-PC
- EasyEDA
- eCADSTAR
- KiCad

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

09.04.2024 Page 7/9

www.wago.com/2606-1353



- OrCAD\_Allegro16
- PADS
- Proteus
- Pulsonix
- Quadcept
- SOLIDWORKS PCB
- TARGET 3001!
- xDX Designer
- Xpedition

PCB Component Libraries (EDA), PCB CAD Library SamacSys Electronic Component Search Engine

CAD	data
-----	------

2D/3D Models 2606-1353	URL	Download
CAE data		
ZUKEN Portal 2606-1353	URL	Download
Asset Administration Shell		
Asset Administration Shell 2606-1353	URL	Download

# **Environmental Product Compliance**

Compliance Search

Environmental Product Compliance 2606-1353

PCB terminal block; lever; 6 mm²; Pin spacing 12.5 mm; 3-pole; Push-in CAGE

CLAMP®; 6,00 mm²; gray

# **Installation Notes**

Conductor termination

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.


www.wago.com/2606-1353





Insert fine-stranded conductors – and remove all conductors – via operating tool.

### Conductor termination



Insert solid conductors via push-in termination.

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$