
2380403-3 🗸 ACTIVE

TE Internal #: 2380403-3 Tin over Nickel, 50 VAC, 24 AWG Wire Size, .2 mm² Wire Size, Crimp, Copper Alloy, Power, -40 - 221 °F [-40 - 105 °C] View on TE.com >



Connectors > Contacts > Connector Contacts

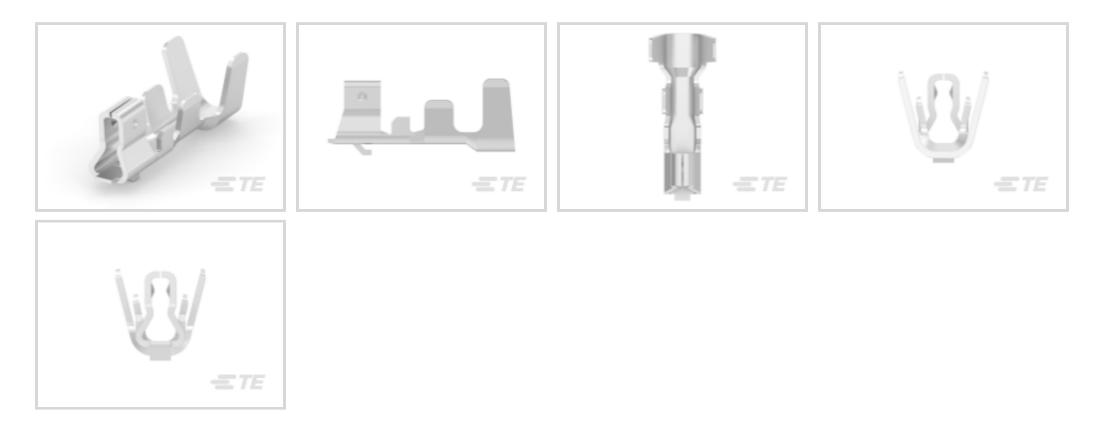

Contact Mating Area Plating Material: Tin over Nickel

Wire Contact Termination Area Plating Material: Tin over Nickel

Operating Voltage: 50 VAC

Wire Size: .2 mm²

Features

Electrical Characteristics

Operating Voltage

Contact Features

Contact Underplating Material Thickness	1.27 μm[50 μin]
Wire Contact Termination Area Plating Thickness	.2 μm[.2 μin]
Contact Mating Area Plating Material Thickness	.2 μm[.2 μin]
Contact Orientation	Straight
Contact Underplating Material	Nickel
Contact Mating Area Plating Material	Tin over Nickel
Wire Contact Termination Area Plating Material	Tin over Nickel
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	3 A
Termination Features	
Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable
Mechanical Attachment	
Wire Insulation Support	With

C For support call +1 800 522 6752

2380403-3

Tin over Nickel, 50 VAC, 24 AWG Wire Size, .2 mm² Wire Size, Crimp, Copper Alloy, Power, -40 - 221 °F [-40 - 105 °C]



Dimensions	
Wire Size	.2 mm ²
Usage Conditions	
Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]
Operation/Application	
Circuit Application	Power
Packaging Features	
Packaging Method	Reel
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240)

Halogen Content

Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

2380403-3

Tin over Nickel, 50 VAC, 24 AWG Wire Size, .2 mm² Wire Size, Crimp, Copper Alloy, Power, -40 - 221 °F [-40 - 105 °C]






Customers Also Bought







TE Part # 281934-2



TE Part # 114017-ZZ

AMP SUPERSEAL 1.5MM, CONNECTOR HOUSING

SINGLE WIRE SEAL

SEALING PLUG, SIZE 12/16, WHT

Documents

Product Drawings

1.5P WTB HP CABLE CRIMP CNT TIN

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_2380403-3_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2380403-3_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2380403-3_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions**of use

2380403-3

Tin over Nickel, 50 VAC, 24 AWG Wire Size, .2 mm² Wire Size, Crimp, Copper Alloy, Power, -40 - 221 °F [-40 - 105 °C]



Datasheets & Catalog Pages HPI Connectors QRG

English

Product Specifications

Product Specification

English