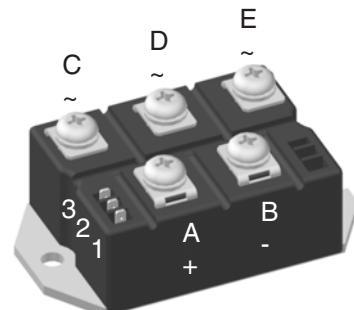
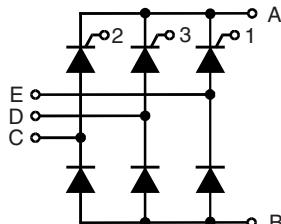


# Three Phase Half Controlled Rectifier Bridge, B6HK

$I_{dAVM} = 110/167 A$   
 $V_{RRM} = 1200-1600 V$

$V_{RSM}$ $V_{DSM}$	$V_{RRM}$ $V_{DRM}$	Type
V	V	
1300 1700	1200 1600	VVZ 110-12io7 VVZ 175-16io7



Symbol	Test Conditions	Maximum Ratings		
		VVZ 110	VVZ 175	
$I_{dAV}$	$T_c = 85^\circ C$ ; module per leg	110	167	A
$I_{FRMS}, I_{TRMS}$		58	89	A
$I_{FSM}, I_{TSM}$	$T_{VJ} = 45^\circ C$ ; $t = 10 \text{ ms}$ (50 Hz), sine $V_R = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine	1150	1500	A
	$T_{VJ} = T_{VJM}$ $t = 10 \text{ ms}$ (50 Hz), sine $V_R = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine	1230	1600	A
$I^2t$	$T_{VJ} = 45^\circ C$ $t = 10 \text{ ms}$ (50 Hz), sine $V_R = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine	1000	1350	A
	$T_{VJ} = T_{VJM}$ $t = 10 \text{ ms}$ (50 Hz), sine $V_R = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine	1070	1450	A
$(di/dt)_{cr}$	$T_{VJ} = T_{VJM}$ repetitive, $I_T = 50 \text{ A}$ $f = 400 \text{ Hz}$ , $t_p = 200 \mu\text{s}$ $V_D = 2/3 V_{DRM}$ $I_G = 0.3 \text{ A}$ , non repetitive, $di_G/dt = 0.3 \text{ A}/\mu\text{s}$ , $I_T = 1/3 \cdot I_{dAV}$	6600	11200	$A^2\text{s}$
		6280	10750	$A^2\text{s}$
$(dv/dt)_{cr}$	$T_{VJ} = T_{VJM}$ ; $V_{DR} = 2/3 V_{DRM}$ $R_{GK} = \infty$ ; method 1 (linear voltage rise)	5000	9100	$A^2\text{s}$
		4750	8830	$A^2\text{s}$
$V_{RGM}$		150	500	$A/\mu\text{s}$
$P_{GM}$	$T_{VJ} = T_{VJM}$ $t_p = 30 \mu\text{s}$ $I_T = I_{TAVM}$ $t_p = 500 \mu\text{s}$ $t_p = 10 \text{ ms}$	$\leq$ $\leq$ $\leq$	10 5 1	W
			0.5	W
$P_{GAVM}$		-40...+125		$^\circ\text{C}$
$T_{VJ}$		125		$^\circ\text{C}$
$T_{VJM}$		-40...+125		$^\circ\text{C}$
$T_{stg}$				
$V_{ISOL}$	50/60 Hz, RMS $t = 1 \text{ min}$	2500	1000	$V\sim$
	$I_{ISOL} \leq 1 \text{ mA}$ $t = 1 \text{ s}$	3000	1000	$V\sim$
$M_d$	Mounting torque (M6) Terminal connection torque (M6)	5±15 %	5±15 %	Nm
<b>Weight</b>	typ.	300	300	g

Data according to IEC 60747 and refer to a single thyristor/diode unless otherwise stated.

IXYS reserves the right to change limits, test conditions and dimensions.

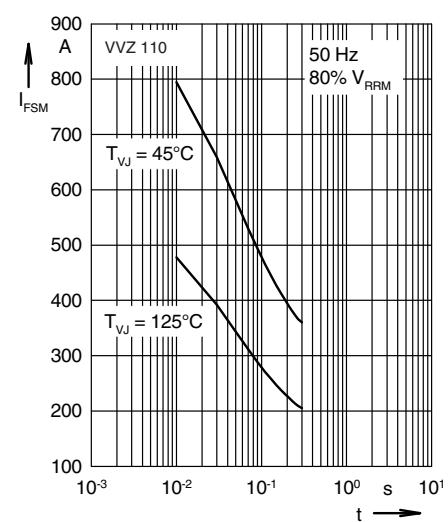
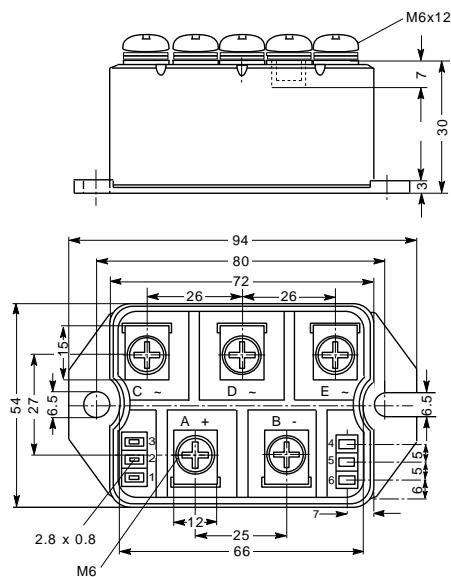
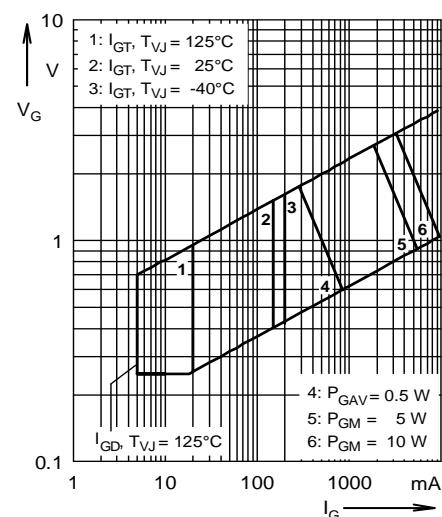
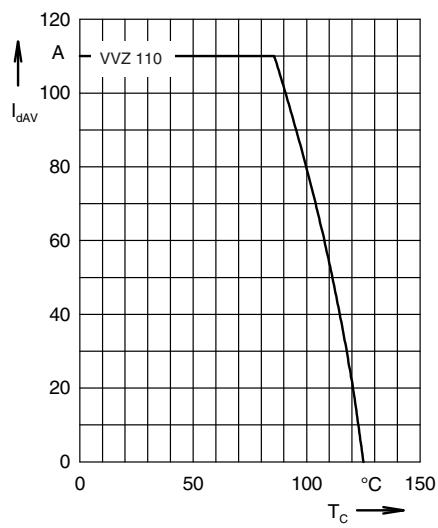
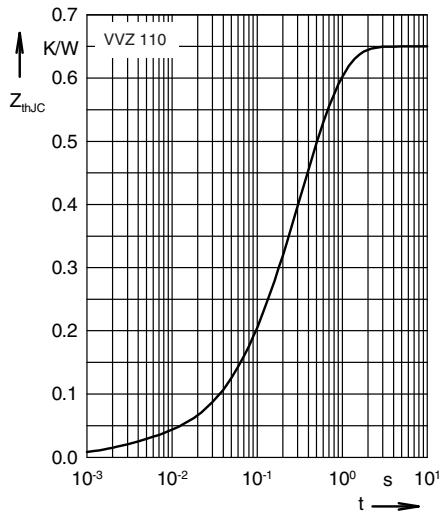
© 2010 IXYS All rights reserved

20100706b

1 - 2

**Symbol**
**Test Conditions**
**Characteristic Values**  
**VVZ 110 | VVZ 175**

$I_R, I_D$	$V_R = V_{RRM}; V_D = V_{DRM}$	$T_{VJ} = T_{VJM}$ $T_{VJ} = 25^\circ C$	$\leq$	5	mA
			$\leq$	0.3	mA
$V_F, V_T$	$I_F, I_T = 200 A, T_{VJ} = 25^\circ C$		$\leq$	1.75	V
$V_{TO}$ $r_T$	For power-loss calculations only $(T_{VJ} = 125^\circ C)$		0.85	0.85	V
			6	3.5	$m\Omega$
$V_{GT}$	$V_D = 6 V; T_{VJ} = 25^\circ C$		$\leq$	1.5	V
		$T_{VJ} = -40^\circ C$	$\leq$	1.6	V
$I_{GT}$	$V_D = 6 V; T_{VJ} = 25^\circ C$		$\leq$	100	mA
		$T_{VJ} = -40^\circ C$	$\leq$	200	mA
$V_{GD}$ $I_{GD}$	$T_{VJ} = T_{VJM}; V_D = \frac{2}{3} V_{DRM}$		$\leq$	0.2	V
	$T_{VJ} = T_{VJM}; V_D = \frac{2}{3} V_{DRM}$		$\leq$	5	mA
$I_L$	$I_G = 0.3 A; t_g = 30 \mu s$	$T_{VJ} = 25^\circ C$	$\leq$	450	mA
	$dI_G/dt = 0.3 A/\mu s$				
$I_H$	$T_{VJ} = 25^\circ C; V_D = 6 V; R_{GK} = \infty$		$\leq$	200	mA
$t_{gd}$	$T_{VJ} = 25^\circ C; V_D = \frac{1}{2} V_{DRM}$		$\leq$	2	$\mu s$
	$I_G = 0.3 A; dI_G/dt = 0.3 A/\mu s$				
$R_{thJC}$	per thyristor (diode); DC current		0.65	0.46	K/W
	per module		0.108	0.077	K/W
$R_{thJH}$	per thyristor (diode); DC current		0.8	0.55	K/W
	per module		0.133	0.092	K/W
$d_s$	Creeping distance on surface		10		mm
$d_A$	Creepage distance in air		9.4		mm
$a$	Max. allowable acceleration		50		$m/s^2$

**Dimensions in mm (1 mm = 0.0394")**

**Fig. 3 Surge overload current**  
 $I_{FSM}$ : Crest value, t: duration

**Fig. 1** Gate trigger characteristics

**Fig. 2** DC output current at case temperature

**Fig. 4** Transient thermal impedance junction to case (per leg)



---

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).