


## 6 - Ferrules

### Non-Insulated Ferrules

Material: Copper

Plating: Tin

Maximum Temperature: 176°C

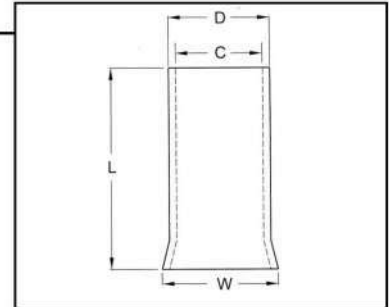

HOFFMAN PART NO	AMPS	WIRE SIZE	DIMENSIONS (INCHES)				UL
			L	D	C	W	
FE226	9	22	0.236	0.051	0.039	0.067	Y
FE206	12	20	0.236	0.059	0.047	0.075	Y
FE186	17	18	0.236	0.067	0.055	0.087	Y
FE167	18	16	0.276	0.079	0.067	0.098	Y
FE147	30	14	0.276	0.102	0.091	0.130	Y
FE40	35	12	0.354	0.126	0.110	0.154	Y
FE1212	35	12	0.472	0.126	0.110	0.154	Y
FE1010	50	10	0.394	0.154	0.138	0.185	Y
FE815	70	8	0.591	0.193	0.177	0.228	Y
FE615	95	6	0.591	0.244	0.228	0.283	Y
FE418	125	4	0.709	0.311	0.295	0.358	Y
FE220	170	2	0.787	0.343	0.327	0.402	Y
FE1/022	230	1/0	0.866	0.429	0.406	0.500	Y
FE2/025	265	2/0	0.984	0.563	0.531	0.622	Y
FE3/025	310	3/0	0.984	0.614	0.583	0.681	Y
FE4/030	360	4/0	1.181	0.697	0.657	0.795	Y