

80 WATTS


MULTI OUTPUT AC-DC

FEATURES:

- Compact 3.0" x 5.0" x 1.0" Size
- 3 Year Warranty
- Universal 85-264V Input
- Dual, Triple or Quad Outputs
- 87% Peak Efficiency
- 85% Average Efficiency
- <1W No Load Input Power
- IEC 60601-1 3rd ed. Medical Cert.
- IEC 62368-1 2nd ed. Certification
- IEC 60601-1-2 4th ed. EMC
- Class B Emissions per EN55011/32
- 0-70°C Operating Temperature
- RoHS Compliant
- Optional Chassis/Cover



CHASSIS/COVER



OPEN FRAME

SAFETY SPECIFICATIONS

| | | |
|--|---|--|
| | Underwriters Laboratories File E137708/E140259 | UL 62368-1:2014, 2 nd Edition CAN/CSA-C22.2 No. 62368-1-14, 2 nd Edition AAMI/ANSI ES60601-1:2005/(R) 2012(R)2021 CAN/CSA-C22.2 No. 60601-1:2014:2022 |
| | | CB Reports/Certificates (including all National and Group Deviations) |
| | TUV SUD America | IEC 62368-1:2014, 2nd Edition IEC 60601-1:2005/A1:2012 |
| | Low Voltage Directive RoHS Directive (Recast) | (2014/35/EU of February 2014) (2015/863/EU of March 2015) |
| | Electrical Equipment (Safety) Regulations 2016 SI No. 1101 Restriction of the Use of Certain Hazardous Substances in EEE Regulations 2012 SI No. 3032 + 2019 SI No.492 | |

MODEL LISTING

| MODEL | OUTPUT 1 | OUTPUT 2 | OUTPUT 3 | OUTPUT 4 |
|-------------|------------|------------|-----------|-----------|
| GRN-80-4001 | +3.3V/8.0A | +5.0V/5.0A | +12V/1.5A | -12V/1.5A |
| GRN-80-4002 | +5.0V/8.0A | -5.0V/5.0A | +12V/1.5A | -12V/1.5A |
| GRN-80-4003 | +5.0V/8.0A | +24V/1.0A | +12V/1.5A | -12V/1.5A |
| GRN-80-4004 | +5.0V/8.0A | +24V/1.0A | +15V/1.5A | -15V/1.5A |
| GRN-80-3001 | +5.0V/8.0A | | +12V/2.0A | -12V/2.0A |
| GRN-80-3002 | +5.0V/8.0A | | +15V/2.0A | -15V/2.0A |
| GRN-80-2001 | +5.0V/8.0A | +24V/2.0A | | |
| GRN-80-2002 | +5.0V/8.0A | +12V/4.0A | | |
| GRN-80-2003 | +12V/4.0A | -12V/4.0A | | |
| GRN-80-2004 | +15V/3.0A | -15V/3.0A | | |

ORDERING INFORMATION

Consult factory for alternate output configurations.
Consult factory for positive, negative or floating outputs.(13)

Please specify the following optional features when ordering:

CH - Chassis
CO - Cover
OVP - Overvoltage Protection
I/O - Isolated outputs

GRN-80

OUTPUT SPECIFICATIONS

| | | |
|---|---|---|
| Output Power at 50°C ₍₁₎ (See Derating Chart) | 80W | 85-264 V _{IN} |
| Voltage Centering | Output 1: ±0.5% Outputs 2 - 4: ±5.0% | (All outputs at 50% load) |
| Voltage Adjust Range | Output 1: 95-105% | |
| Load Regulation | Output 1: ±0.5% Outputs 2 - 4: ±5.0% | (0-100% load change) (10-100% load change) |
| Source Regulation | Outputs 1 - 4: 0.5% | |
| Cross Regulation | Outputs 2 - 4: 5.0% | |
| Ripple & Noise | Outputs 1 - 4: 1.0% | |
| Turn On Overshoot | <1% | |
| Transient Response | Output recovers to within 1% of initial set point due to a 50% step load change, 500µs maximum, 4% maximum deviation. | |
| Overvoltage Protection | Latching, Output 1 between 110% and 150% of rated output voltage (optional) | |
| Overpower Protection | 110%-150% rated P _{OUT} , cycle on/off, auto recovery | |
| Hold-Up Time | 16ms typical, full power, 115V input | |
| Start-Up Time | 1 sec., 115/230V input | |
| Output Rise Time | 25ms typical | |
| Minimum Load ⁽⁵⁾ | No minimum load required | |

INPUT SPECIFICATIONS

| | |
|---------------------------------|--|
| Protection Class | I |
| Source Voltage | 85 - 264 VAC (see derating chart) |
| Frequency Range | 47 - 63 Hz |
| Input Protection ⁽⁶⁾ | Internal 3A time delay fuse, 1500A breaking capacity |
| Peak Inrush Current | 50A max. at 230 V |
| Peak Efficiency | 87% |
| Average Efficiency | 85% (Avg. of 25%, 50%, 75% and 100% rated load) |
| Light Load Efficiency | 85%, 115/230 V _{IN} , 33% power |
| No Load Input Power | <1W, 115/230 V _{IN} , no load |

ENVIRONMENTAL SPECIFICATIONS

| | |
|-----------------------------------|---|
| Cooling | Free air convection |
| Ambient Operating | 0°C to +70°C |
| Temperature Range | Derating: see power rating chart |
| Ambient Storage Temp. Range | -40°C to +85°C |
| Operating Relative Humidity Range | 20-90% non-condensing |
| Altitude | 3,000m ASL Operating 12,192m ASL Non-Operating |
| Temperature Coefficient | 0.02%/°C |
| Vibration | 2.5G swept sine, 7-2000Hz, 1 octave/min, 3 axis, 1 hour each. |
| Shock | 20G, 11ms, 3 axis, 3 each direction. |

GENERAL SPECIFICATIONS

| | |
|---------------------------------------|--|
| Means of Protection | |
| Primary to Secondary | 2MOPP (Means of Patient Protection) |
| Primary to Ground | 1MOPP (Means of Patient Protection) |
| Secondary to Ground | Operational Insulation(Consult factory for 1MOPP) |
| Dielectric Strength ^(8, 9) | |
| Reinforced Insulation | 5656 VDC, Primary to Secondary |
| Basic Insulation | 2121 VDC, Primary to Ground |
| Operational Insulation | 707 VDC, Secondary to Ground |
| Leakage Current | |
| Earth Leakage | <300µA NC, <1000µA SFC |
| Touch Current | <100µA NC, <500µA SFC |
| Switching Frequency | 100 KHz |
| Mean-Time Between Failures | >300,000 hours, MIL-HDBK-217F, 25° C, GB |
| Weight | 0.63 lbs. Open frame / 0.80 lbs. Chassis and cover |


EMC SPECIFICATIONS (IEC 60601-1-2:2014, 4TH ed./IEC 61000-6-2:2005)

| | | | |
|-----------------------------------|---------------|--|---|
| Electrostatic Discharge | EN 61000-4-2 | ±8KV contact / ±15KV air discharge | A |
| Radiated Electromagnetic Field | EN 61000-4-3 | 80MHz-2.7GHz, 10V/m, 80% AM | A |
| Electrical Fast Transients/Bursts | EN 61000-4-4 | ±2 KV, 5KHz/100KHz | A |
| Surge Immunity | EN 61000-4-5 | ±2 KV line to earth / ±1 KV line to line | A |
| Conducted Immunity | EN 61000-4-6 | 0.15 to 80MHz, 10V, 80% AM | A |
| Magnetic Field Immunity | EN 61000-4-8 | 30A/m, 60 Hz. | A |
| Voltage Dips | EN 61000-4-11 | 0% U _T , 0.5 cycles, 0-315° 100/240V A/A 0% U _T , 1 cycles, 0° 100/240V A/A 40% U _T , 10/12 cycles, 0° 100/240V B/A 70% U _T , 25/30 cycles, 0° 100/240V B/A | |
| Voltage Interruptions | EN 61000-4-11 | 0% U _T , 300 cycles, 0° 100/240V B/B | |
| Radiated Emissions | EN 55011/32 | Class B | |
| Conducted Emissions | EN 55011/32 | Class B | |
| Harmonic Current Emissions | EN 61000-3-2 | Class A | |
| Voltage Fluctuations/Flicker | EN 61000-3-3 | Compliant | |


All specifications are maximum at 25°C/80W unless otherwise stated, may vary by model and are subject to change without notice.

GRN-80 MULTI MECHANICAL SPECIFICATIONS

APPLICATIONS INFORMATION

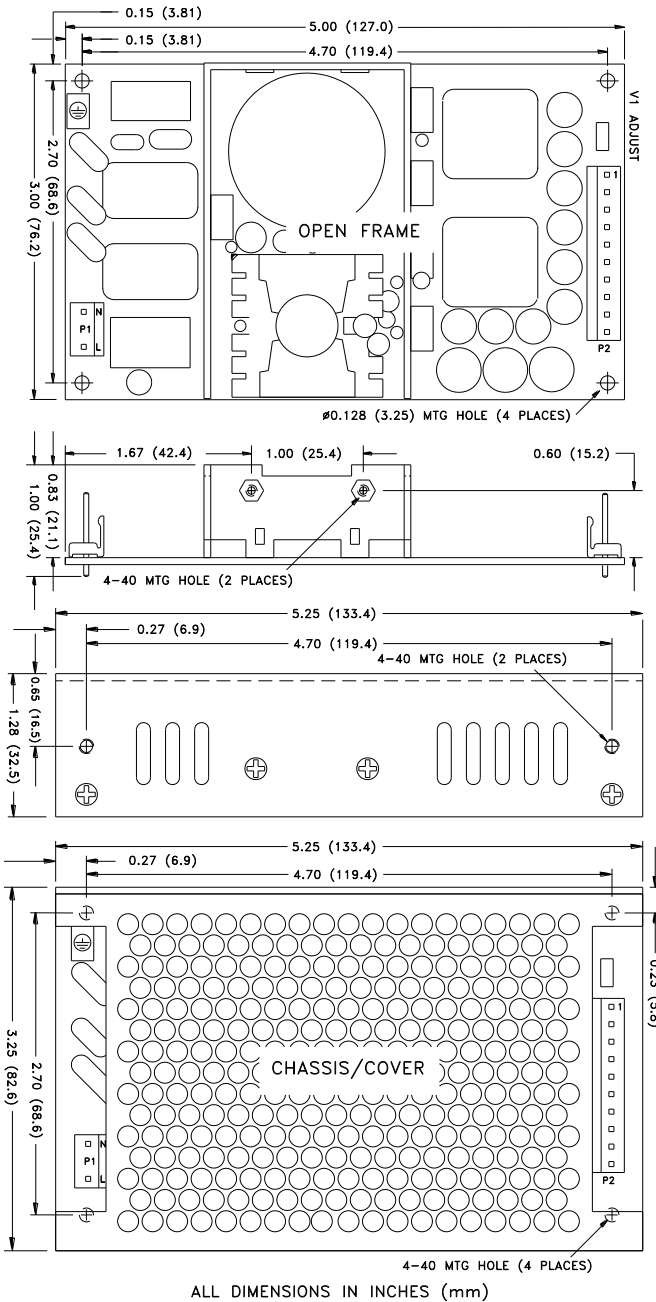


CONNECTOR SPECIFICATIONS

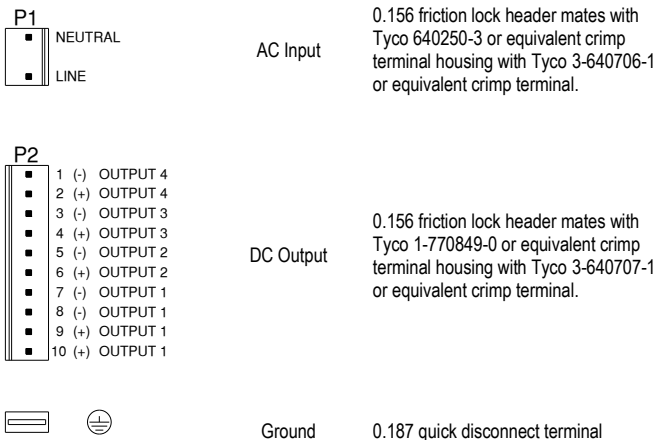


- Each output can deliver its rated current but Total Output Power must not exceed 80W.
- Generally, adequate cooling is provided when semiconductor case temperatures do not exceed 70°C rise and transformer temperature does not exceed 60°C rise at any specified ambient temperature.
- Sufficient area must be provided around power supply to allow natural movement of air to develop in convection-cooled applications.
- This product is intended for use as a professionally-installed component within information technology, industrial, and medical equipment and is not intended for stand-alone operation.
- Minimum load is not required for reliable operation; however, a 10% load may be required on Output 1 when loading Outputs 2, 3 or 4.
- This product includes only one fuse in the input circuit. In consideration of clause 8.11.5 of IEC 60601-1-1:2005, a second fuse may be required in neutral conductor of the end product.
- Peak-to-Peak Output Ripple and Noise is measured directly at the output terminals of the power supply, without the use of the probe ground lead or retractable tip (tip-and-barrel method), 20 MHz bandwidth.
- This product was type-tested and safety-certified using the dielectric strength test voltages listed in Table 6 of IEC60601-1:2005. In consideration of clause 8.8.3, care must be taken to insure that the voltage applied to a reinforced insulation does not overstress different types and levels of insulation. Primary and secondary-to-ground capacitors may need to be disconnected prior to performing a dielectric strength type test on the power supply or the end product. It is highly recommended that the DC test voltage listed in DVB.1, annex DVB of UL60601-1 1ST Edition are not exceeded during a production-line dielectric strength test of the assembled end product. Please consult factory for further information.
- This power supply has been safety-approved and final-tested using a DC dielectric strength test. Please consult factory before performing an AC dielectric strength test.
- Maximum screw penetration into bottom chassis mounting holes is 0.100 inches. Maximum screw penetration into side chassis mounting holes is 0.188 inches.
- To comply with emissions specifications, all four mounting hole pads must be electrically connected to a common metal chassis. Chassis/Cover option is recommended. Refer to Operating Instructions for additional information.
- Common RF shielding precautions may need to be taken to assure emissions compliance. Refer to Operating Instructions for additional information.
- Optional Output Configuration (consult factory).
 - V2 can be configured positive, negative or floating with respect to V1.
 - V3 can be configured positive or floating with respect to V1.
 - V4 can be configured positive, negative or floating with respect to V1.

TYPICAL EFFICIENCY vs. LOAD

(Model GRN-80-3001 Efficiency shown)

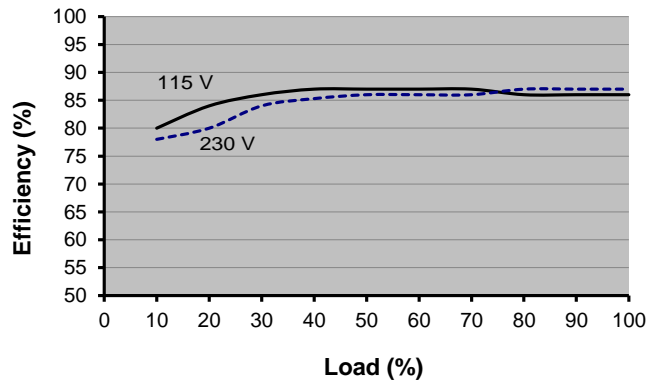

MAX P_{OUT} vs. AMBIENT TEMPERATURE/INPUT VOLTAGE

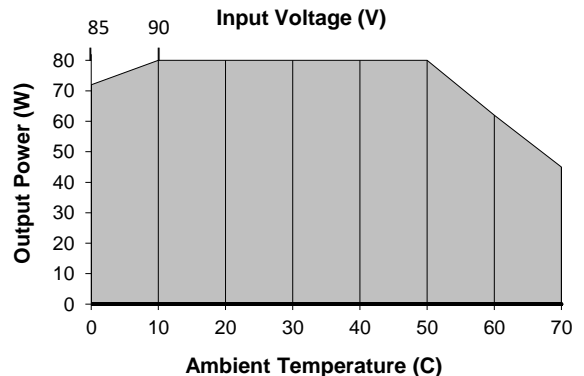

Derating requirements - Derate from 100% load at 50°C to 50% load at 70°C.
 - Derate from 100% load at 90V_{IN} to 90% load at 85V_{IN}.