


# E/MBK - End bracket



1401637  
<https://www.phoenixcontact.com/us/products/1401637>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



End clamp, width: 6.2 mm, color: gray

## Your advantages

- Large-surface marking
- Can be screwed onto NS 15 DIN rails
- Can be mounted directly on the mounting panel as an MBK terminal block

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1401637             |
| Packing unit                         | 100 pc              |
| Minimum order quantity               | 100 pc              |
| Sales key                            | BE07                |
| Product key                          | BE7111              |
| Catalog page                         | Page 539 (C-3-2019) |
| GTIN                                 | 4017918020484       |
| Weight per piece (including packing) | 1.633 g             |
| Weight per piece (excluding packing) | 1.62 g              |
| Customs tariff number                | 39269097            |
| Country of origin                    | PL                  |

# E/MBK - End bracket

1401637

<https://www.phoenixcontact.com/us/products/1401637>



## Technical data


### Product properties

|              |             |
|--------------|-------------|
| Product type | End bracket |
|--------------|-------------|

### Connection data

|                   |                |
|-------------------|----------------|
| Tightening torque | 0.4 ... 0.5 Nm |
|-------------------|----------------|

### Dimensions

|                                                                                     |         |
|-------------------------------------------------------------------------------------|---------|
| Dimensional drawing                                                                 |         |
|  |         |
| Width                                                                               | 6.2 mm  |
| Height                                                                              | 22 mm   |
| Depth                                                                               | 11.4 mm |
| Depth on NS 35/7,5                                                                  | 13 mm   |
| Length                                                                              | 22 mm   |

### Material specifications

|                                        |                    |
|----------------------------------------|--------------------|
| Color                                  | gray               |
| Material                               | PA                 |
| Flammability rating according to UL 94 | V2                 |
| Coating                                | 3.2 mm fixing hole |

### Environmental and real-life conditions

#### Ambient conditions


|                                          |                                                                           |
|------------------------------------------|---------------------------------------------------------------------------|
| Ambient temperature (operation)          | -60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)       |
| Ambient temperature (storage/transport)  | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C) |
| Ambient temperature (assembly)           | -5 °C ... 70 °C                                                           |
| Ambient temperature (actuation)          | -5 °C ... 70 °C                                                           |
| Permissible humidity (storage/transport) | 30 % ... 70 %                                                             |

### Mounting

|               |       |
|---------------|-------|
| Mounting type | NS 15 |
|---------------|-------|

## Drawings

Dimensional drawing

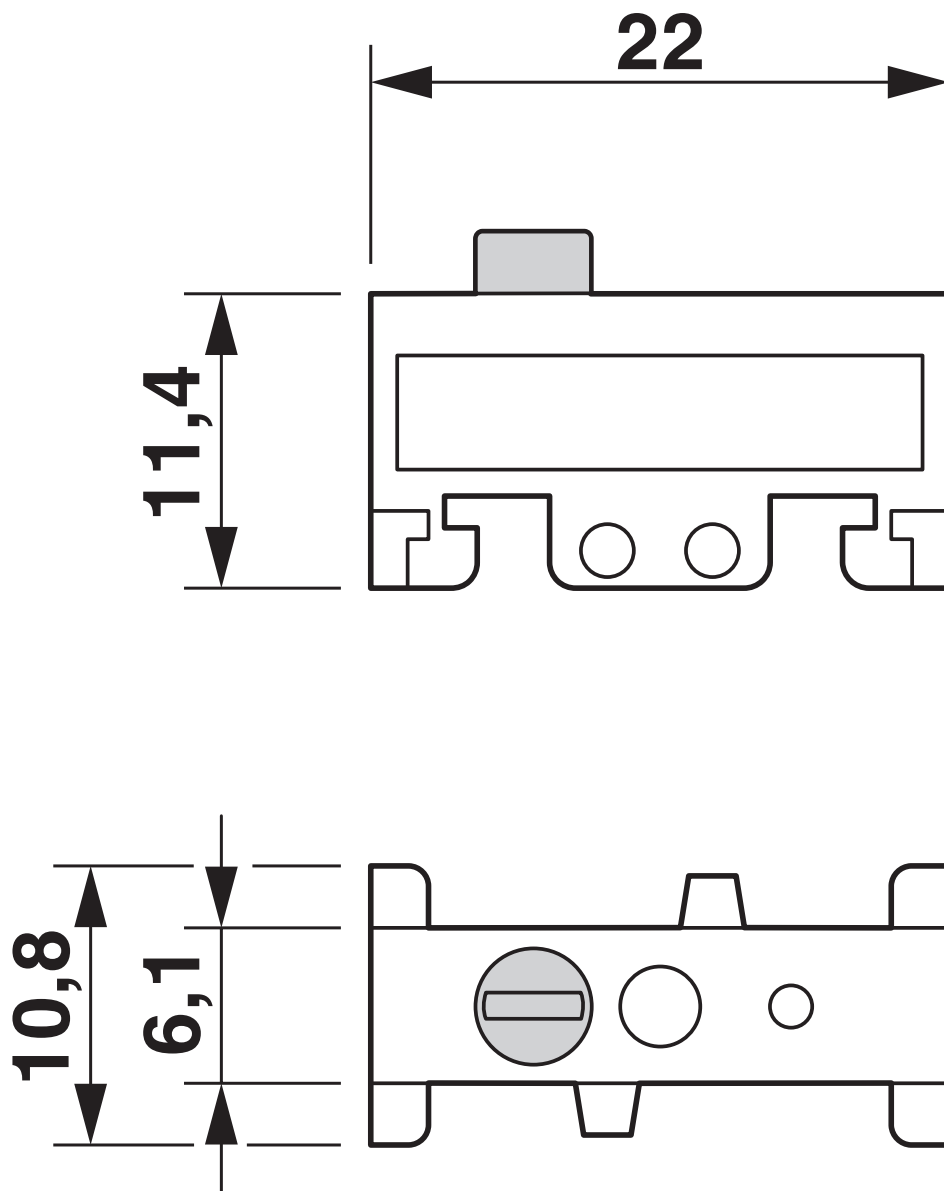

# E/MBK - End bracket



1401637

<https://www.phoenixcontact.com/us/products/1401637>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27141135 |
| ECLASS-12.0 | 27141135 |
| ECLASS-13.0 | 27250302 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001041 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

## E/MBK - End bracket

1401637

<https://www.phoenixcontact.com/us/products/1401637>



### Accessories

#### NS 15 UNPERF 2000MM VPE 10 - DIN rail, unperforated

1401695

<https://www.phoenixcontact.com/us/products/1401695>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

#### NS 15 PERF 2000MM VPE 10 - DIN rail perforated

1401682

<https://www.phoenixcontact.com/us/products/1401682>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

## E/MBK - End bracket

1401637

<https://www.phoenixcontact.com/us/products/1401637>



## NS 15 AL PERF 2000MM VPE 10 - DIN rail perforated

1401763

<https://www.phoenixcontact.com/us/products/1401763>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

---

## NS 15 WH PERF 2000MM-VPE 10 - DIN rail perforated

1204096

<https://www.phoenixcontact.com/us/products/1204096>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

## E/MBK - End bracket

1401637

<https://www.phoenixcontact.com/us/products/1401637>




## KLM 1 - Terminal strip marker carrier

1004319

<https://www.phoenixcontact.com/us/products/1004319>

Terminal strip marker carrier, for E/MBK or CLIPFIX 35 end brackets, can be marked using insert strips in 24 x 4 mm format



---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)