

1424583

https://www.phoenixcontact.com/us/products/1424583

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable feed-through plates, no. of conductors: 27, external cable diameter: 26x 3 mm ... 6 mm, 1x 10 mm ... 20 mm, material: PP (Core), material: TPE-SEBS (external material), color: black, length: 154 mm, width: 56 mm, height: 18.5 mm

Your advantages

• The panel cutouts of size B24 heavy-duty connectors can be used.

Commercial data

Item number	1424583
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF67
Product key	BF7CAX
Catalog page	Page 683 (C-2-2019)
GTIN	4055626374864
Weight per piece (including packing)	76.7 g
Weight per piece (excluding packing)	76.7 g
Customs tariff number	39269097
Country of origin	FI



1424583

https://www.phoenixcontact.com/us/products/1424583

Technical data

Notes

|--|


Product properties

Product type	Cable feed-through
No. of conductors	27

Connection data

External cable diameter	26x 3 mm 6 mm
Tightening torque	1.8 Nm

Dimensions

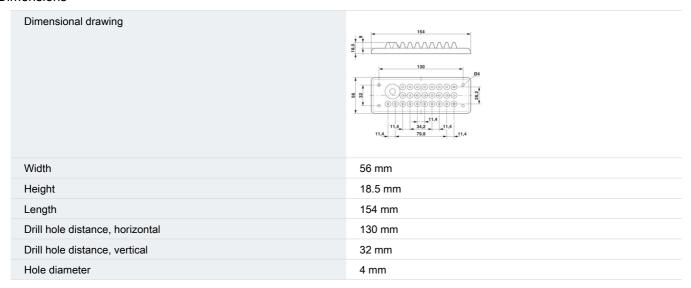

Material specifications

Color	black (RAL 9005)
Material interior	PP
Material exterior	TPE-SEBS
Flammability rating according to UL 94	V0

Cable/line

External cable diameter ()	26x 3 mm 6 mm
	1x 10 mm 20 mm

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
Ambient temperature (operation)	-40 °C 90 °C



1424583

https://www.phoenixcontact.com/us/products/1424583

Mounting

Assembly instructions	M4 mounting screw, torque: 1.8 Nm, SW5 Allen key
	The mounting screws included should be used for assembly.
	Assembly steps:
	Fix Multigates with the mounting screws provided (observe)
	torque)
	2) Make a hole in the membrane (with a screwdriver) or cut off
	the tip of the cone
	Guide the cable through the opening (from the outside).
	Withdraw the cable approximately 20 mm (to improve strain relief).



1424583

https://www.phoenixcontact.com/us/products/1424583

Drawings


Dimensional drawing 130 113 04,5

Wall cutout drawing



1424583

https://www.phoenixcontact.com/us/products/1424583

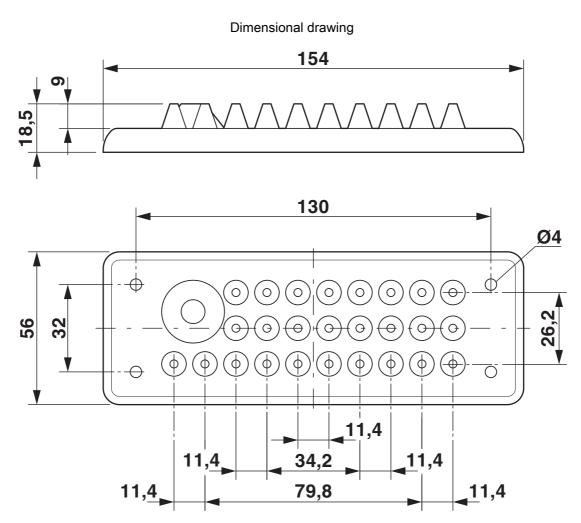

Dimensional drawing



1424583

https://www.phoenixcontact.com/us/products/1424583

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1424583



EAC

Approval ID: EAC-Zulassung



EAC-RoHS

Approval ID: RU D-DE.HB35.B.00387



1424583

https://www.phoenixcontact.com/us/products/1424583

Classifications

UNSPSC 21.0

ECLASS

ECLASS-11.0	27400569
ECLASS-13.0	27400569
ECLASS-12.0	27400569
ETIM	
ETIM 9.0	EC001004
UNSPSC	

31163000



1424583

https://www.phoenixcontact.com/us/products/1424583

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com