PSBJ 6-T BK - Test plug strip

3070318

https://www.phoenixcontact.com/us/products/3070318

PHŒNIX CONTACT

Test plug strip, number of positions: 1, color: black

Commercial data

Item number	3070318
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	BE19
Product key	BE1Z3X
Catalog page	Page 589 (C-1-2019)
GTIN	4046356870832
Weight per piece (including packing)	5.59 g
Weight per piece (excluding packing)	5.59 g
Customs tariff number	85366990
Country of origin	PL

Technical data

Product properties

Product type	Test plug terminal block
Number of positions	1

Connection data

Test socket torque	M3
Connection method	Screw connection

Dimensions

Dimensional drawing	
Width	6 mm
Height	6 mm
Depth	15 mm
Screw thread	M3

Material specifications

Color	black

Environmental and real-life conditions

Ambient conditions

|	
Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

Mounting

Screw thread	M3

Drawings

Dimensional drawing

47,1

M3

Ø6,4

27,4
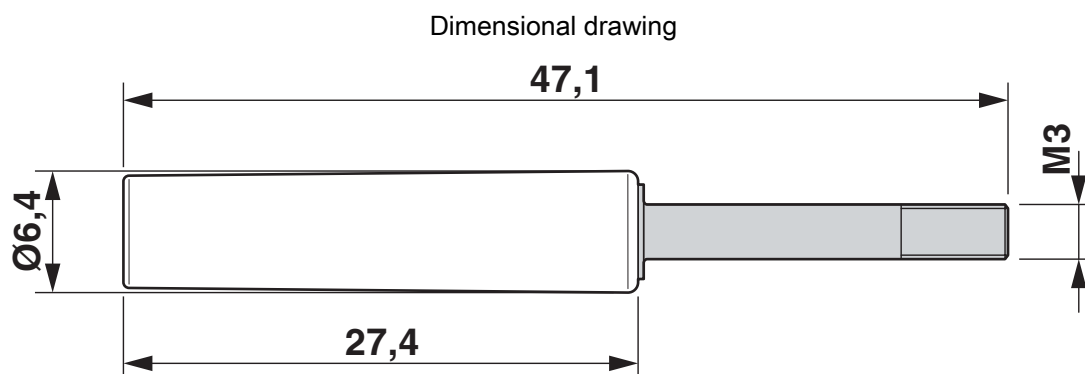
Classifications

ECLASS

ECLASS-11.0	27440313
ECLASS-13.0	27440313
ECLASS-12.0	27440313

ETIM

ETIM 9.0	EC002255

UNSPSC

UNSPSC 21.0	20122000

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	cd09e698-3f63-4709-a82d-057ecbb6ab37

PSBJ 6-T BK - Test plug strip

3070318

https://www.phoenixcontact.com/us/products/3070318

Accessories

SZF 1-0,6X3,5 - Screwdriver

1204517

https://www.phoenixcontact.com/us/products/1204517

Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

SF-SL 0,6X3,5-100 S-VDE - Screwdriver

1212587

https://www.phoenixcontact.com/us/products/1212587

Actuation tool, for ST terminal blocks, VDE insulated, with slimmer insulation integrated in the blade, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip