


# Product data sheet

## Characteristics

### 9065SEO8

Overload Relay, Type S, melting alloy, separate mount overload, NEMA size 2, 3 pole, 3 phase, 45A, 600VAC

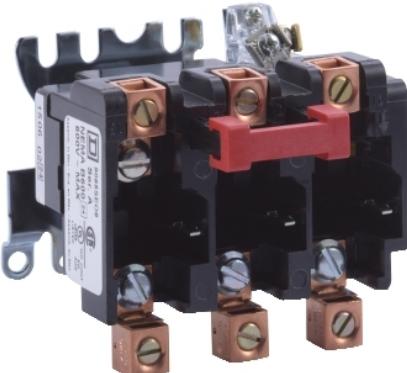

#### Main

Range of Product	S
Product destination	Starter
Thermal overload type	Melting alloy

#### Complementary

NEMA size	2
Phase	3 phase
Number of thermal units required	3
Mounting Support	Panel
Product or Component Type	Overload relay
[Ue] rated operational voltage	600 V AC
Height	3.31 in (84.1 mm)
Width	3.50 in (88.9 mm)
Depth	3.97 in (100.8 mm)

#### Ordering and shipping details

Category	US10CP121661
Discount Schedule	0CP1
GTIN	785901893707
Returnability	Yes
Country of origin	MX

#### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.70 in (11.938 cm)
Package 1 Width	5.20 in (13.208 cm)
Package 1 Length	5.30 in (13.462 cm)
Package 1 Weight	17.60 oz (498.952 g)

#### Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
EU RoHS Directive	Not compliant
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>

## Contractual warranty

---

Warranty	18 months
----------	-----------

---