## **SIEMENS**

## **Data sheet**



Sealing plug for unused control points, 22 mm, plastic sand gray, Z=100-unit packaging

product brand name product designation Sealing plug product type designation Actuator shape of the actuating element outer diameter of the actuating element Protection class IP degree of protection NEMA rating degree of protection NEMA rating 1, 2, 3, 3R, 4, 4X, 12 reference code according to IEC 81346-2 Substance Prohibitance (Date) Ambient conditions ambient temperature during operation during storage and transport environmental category during operation according to IEC 80721 Installation/ mounting/ dimensions shape of the installation opening mounting diameter positive tolerance of installation diameter unutually diameter positive tolerance of installation diameter unutually diameter positive tolerance of installation diameter unutually diameter positive tolerance of installation diameter unuting height installation depth Accessories material of accessory Plastic color of accessory Plastic Further Information		
product type designation  Actuator  shape of the actuating element outer diameter of the actuating element protection class IP degree of protection NEMA rating reference code according to IEC 81346-2 Substance Prohibitance (Date) Ambient conditions  ambient temperature outing storage and transport environmental category during operation according to IEC 80721 Installation/mounting/dimensions shape of the installation opening mounting diameter positive tolerance of installation diameter mounting height installation depth Accessories material of accessory color of accessory certificates/approvals	product brand name	SIRIUS ACT
Actuator  shape of the actuating element outer diameter of the actuating element 29.5 mm  General technical data protection class IP IP66, IP67, IP69(IP69K) degree of protection NEMA rating 1, 2, 3, 3R, 4, 4X, 12 reference code according to IEC 81346-2 Substance Prohibitance (Date) 10/01/2014  Ambient conditions ambient temperature • during operation • during storage and transport • during storage and transport environmental category during operation according to IEC 60721 Installation/ mounting/ dimensions shape of the installation opening mounting diameter positive tolerance of installation diameter mounting height installation width 29.5 mm installation width 29.5 mm installation depth Accessories material of accessory plastic color of accessory sand gray Certificates/ approvals	product designation	Sealing plug
shape of the actuating element outer diameter of the actuating element 29.5 mm  General technical data protection class IP degree of protection NEMA rating reference code according to IEC 81346-2 Substance Prohibitance (Date) 10/01/2014  Ambient conditions ambient temperature during operation during storage and transport during storage and transport environmental category during operation according to IEC 80721  Installation/ mounting/ dimensions shape of the installation opening mounting diameter positive tolerance of installation diameter mounting height installation width 29.5 mm installation width 29.5 mm  Accessories material of accessory sand gray Certificates/ approvals	product type designation	3SU1
outer diameter of the actuating element  General technical data  protection class IP  degree of protection NEMA rating  1, 2, 3, 3R, 4, 4X, 12  reference code according to IEC 81346-2  Substance Prohibitance (Date)  Ambient conditions  ambient temperature  • during operation  • during storage and transport  environmental category during operation according to IEC  amounting diamental category during operation according to IEC  amounting diameter  positive tolerance of installation diameter  nounting height  installation width  29.5 mm  installation depth  Accessories  material of accessory  Plastic  color of accessory  sand gray  Certificates/ approvals	Actuator	
General technical data  protection class IP  degree of protection NEMA rating  1, 2, 3, 3R, 4, 4X, 12  reference code according to IEC 81346-2  Substance Prohibitance (Date)  Ambient conditions  ambient temperature  • during operation • during storage and transport  environmental category during operation according to IEC 60721  Installation/ mounting/ dimensions  shape of the installation opening  mounting diameter  positive tolerance of installation diameter  mounting height installation width 29.5 mm installation depth  Accessories  material of accessory  plastic color of accessory  certificates/ approvals	shape of the actuating element	round
protection class IP IP66, IP67, IP69(IP69K) degree of protection NEMA rating 1, 2, 3, 3R, 4, 4X, 12 reference code according to IEC 81346-2 S Substance Prohibitance (Date) 10/01/2014  Ambient conditions ambient temperature	outer diameter of the actuating element	29.5 mm
degree of protection NEMA rating reference code according to IEC 81346-2 Substance Prohibitance (Date)  Ambient conditions  ambient temperature	General technical data	
reference code according to IEC 81346-2  Substance Prohibitance (Date)  Ambient conditions  ambient temperature  • during operation • during storage and transport  environmental category during operation according to IEC 60721  Installation/ mounting/ dimensions  shape of the installation opening  mounting diameter  positive tolerance of installation diameter  mounting height installation width 29.5 mm installation depth  Accessories  material of accessory  color of accessory  Certificates/ approvals	protection class IP	IP66, IP67, IP69(IP69K)
Substance Prohibitance (Date)  Ambient conditions  ambient temperature  • during operation  • during storage and transport  environmental category during operation according to IEC 60721  Installation/ mounting/ dimensions  shape of the installation opening round mounting diameter 22.3 mm  positive tolerance of installation diameter 0.4 mm  mounting height 6.5 mm  installation width 29.5 mm  installation depth 24.2 mm  Accessories  material of accessory Plastic color of accessory sand gray  Certificates/ approvals	degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12
Ambient conditions  ambient temperature  • during operation  • during storage and transport  environmental category during operation according to IEC 60721  Installation/ mounting/ dimensions  shape of the installation opening mounting diameter positive tolerance of installation diameter mounting height installation width 29.5 mm installation depth  Accessories  material of accessory color of accessory certificates/ approvals	reference code according to IEC 81346-2	S
ambient temperature  • during operation  • during storage and transport  environmental category during operation according to IEC 60721  Installation/ mounting/ dimensions  shape of the installation opening  mounting diameter  positive tolerance of installation diameter  mounting height  installation width  installation width  29.5 mm  installation depth  Accessories  material of accessory  plastic  color of accessory  set during operation  7025 °C  -40 +80 °C  3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)  8M6, 3	Substance Prohibitance (Date)	10/01/2014
<ul> <li>during operation</li> <li>during storage and transport</li> <li>40 +80 °C</li> <li>environmental category during operation according to IEC 60721</li> <li>Installation/ mounting/ dimensions</li> <li>shape of the installation opening round mounting diameter</li> <li>positive tolerance of installation diameter</li> <li>0.4 mm</li> <li>mounting height</li> <li>installation width</li> <li>29.5 mm</li> <li>installation depth</li> <li>Accessories</li> <li>material of accessory</li> <li>Plastic</li> <li>color of accessory</li> <li>sand gray</li> <li>Certificates/ approvals</li> </ul>	Ambient conditions	
during storage and transport     environmental category during operation according to IEC     60721  Installation/ mounting/ dimensions     shape of the installation opening     mounting diameter     positive tolerance of installation diameter     mounting height     installation width     installation width     29.5 mm     installation depth  Accessories  material of accessory     color of accessory  Certificates/ approvals  -40 +80 °C  3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)  3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)  3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)  3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)  3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)  3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)  3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)  3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)  3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)  3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)  3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)  3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)  3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)  3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)  3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)  3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)  3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)  40.4 mm  40.4 mm  40.5 mm	ambient temperature	
environmental category during operation according to IEC 60721  Installation/ mounting/ dimensions  shape of the installation opening round mounting diameter 22.3 mm positive tolerance of installation diameter 0.4 mm mounting height 6.5 mm installation width 29.5 mm installation depth 24.2 mm  Accessories material of accessory Plastic color of accessory sand gray  Certificates/ approvals	<ul> <li>during operation</li> </ul>	7025 °C
Installation/ mounting/ dimensions shape of the installation opening round mounting diameter 22.3 mm positive tolerance of installation diameter 0.4 mm mounting height 6.5 mm installation width 29.5 mm installation depth 24.2 mm  Accessories material of accessory Plastic color of accessory sand gray  Certificates/ approvals	during storage and transport	-40 +80 °C
shape of the installation opening mounting diameter 22.3 mm  positive tolerance of installation diameter 0.4 mm mounting height installation width 29.5 mm installation depth 24.2 mm  Accessories material of accessory Plastic color of accessory sand gray  Certificates/ approvals		3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)
mounting diameter  positive tolerance of installation diameter  mounting height  installation width  installation depth  Accessories  material of accessory  color of accessory  Certificates/ approvals	Installation/ mounting/ dimensions	
positive tolerance of installation diameter  mounting height 6.5 mm installation width 29.5 mm installation depth 24.2 mm  Accessories material of accessory Color of accessory sand gray  Certificates/ approvals	shape of the installation opening	round
mounting height installation width 29.5 mm installation depth 24.2 mm  Accessories material of accessory Color of accessory sand gray  Certificates/ approvals	mounting diameter	22.3 mm
installation width 29.5 mm installation depth 24.2 mm  Accessories material of accessory Plastic color of accessory sand gray  Certificates/ approvals	positive tolerance of installation diameter	0.4 mm
installation depth 24.2 mm  Accessories  material of accessory Plastic color of accessory sand gray  Certificates/ approvals	mounting height	6.5 mm
Accessories  material of accessory  color of accessory  sand gray  Certificates/ approvals	installation width	29.5 mm
material of accessory  color of accessory  sand gray  Certificates/ approvals	installation depth	24.2 mm
color of accessory sand gray  Certificates/ approvals	Accessories	
Certificates/ approvals	material of accessory	Plastic
	color of accessory	sand gray
Further information	Certificates/ approvals	
	Further information	

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)


 $\underline{\text{https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1930-0FA80-0AA0-Z~X90}\\$ 


Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1930-0FA80-0AA0-Z X90

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3SU1930-0FA80-0AA0-Z X90

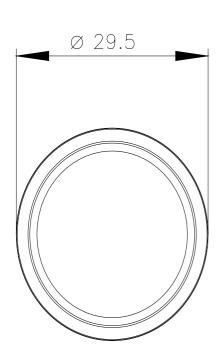

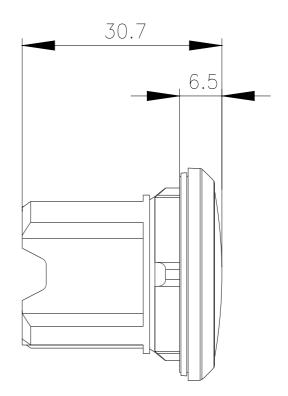

last modified: 4/4/2022 🖸