

Data sheet | Item number: 709-350

Shield termination; including cable ties for shield diameters 5 mm to 10 mm;
60 mm long

www.wago.com/709-350



Data

Technical data

Main product function	Shield termination
-----------------------	--------------------

Material data

Fire load	0.018 MJ
Weight	1.2 g

Commercial data

Product Group	2 (Terminal Block Accessories)
eCl@ss 10.0	27-14-11-92

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



eCl@ss 9.0	27-14-11-92
ETIM 8.0	EC002650
ETIM 7.0	EC002650
ECCN	NO DATA
PU (SPU)	100 (25) pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454306953
Customs tariff number	85444290900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads

Documentation

Bid Text

709-350	2019 年2月21 日	xml	Download
X81 - Datei		3.0 kB	
709-350	2019 年2月21 日	docx	Download
docx - Datei		14.7 kB	

CAD/CAE-Data

CAE data

WSCAD Universe 709-350	URL	Download
------------------------	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 709-350	URL	Download
Shield termination; including cable ties for shield diameters 5 mm to 10 mm; 60 mm long		


Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.


Shield termination

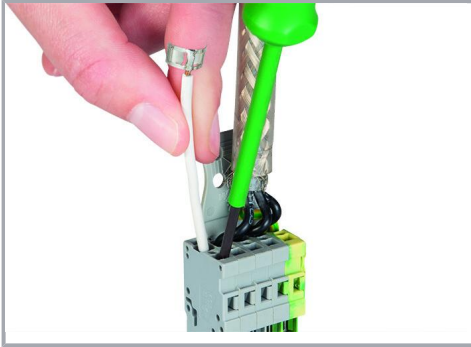

Insert the shield termination into the female plug using the operating tool.



Fit the shield cable to the shield cable.

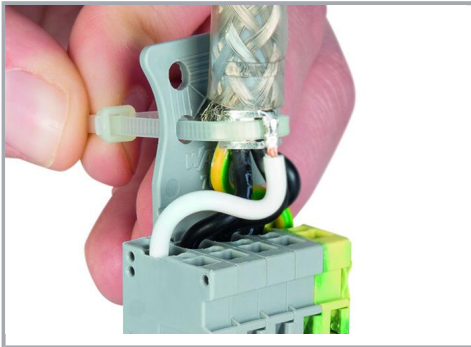

Secure both shield cable and shield termination to the strain relief plate using cable ties.



Shield termination connected to an X-COM®
Female Plug

Subject to changes. Please also observe the further product documentation!