



|        |       |
|--------|-------|
| Weight | 2.7 g |
|--------|-------|

### Commercial data

|                       |                        |
|-----------------------|------------------------|
| Product Group         | 3 (Multi Conn. System) |
| eCl@ss 10.0           | 27-44-04-92            |
| eCl@ss 9.0            | 27-44-04-92            |
| ETIM 8.0              | EC002848               |
| ETIM 7.0              | EC002848               |
| ECCN                  | NO DATA                |
| PU (SPU)              | 50 (25) pcs            |
| Packaging type        | box                    |
| Country of origin     | DE                     |
| GTIN                  | 4045454163143          |
| Customs tariff number | 8538909990             |

### Environmental Product Compliance

|                        |                         |
|------------------------|-------------------------|
| RoHS Compliance Status | Compliant, No Exemption |
|------------------------|-------------------------|

### Approvals / Certificates

#### Approvals for marine applications

| Logo  | Approval              | Additional Approval Text | Certificate name |
|---|-----------------------|--------------------------|------------------|
|  | LR<br>Lloyds Register | IEC 61984                | 96/20035<br>(E5) |

### Downloads

#### Documentation

#### Additional Information

|                        |            |        |          |
|------------------------|------------|--------|----------|
| Technical Section      | 2019 年4月3日 | pdf    | Download |
| Technical explanations |            | 2.1 MB |          |

### CAD/CAE-Data

#### CAD data

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.

2D/3D Models 734-426

[URL](#)

[Download](#)

---

#### CAE data

ZUKEN Portal 734-426

[URL](#)

[Download](#)

---

#### Asset Administration Shell

Asset Administration Shell 734-426

[URL](#)

[Download](#)

---

### Environmental Product Compliance

#### Compliance Search

Environmental Product Compliance 734-426

[URL](#)


[Download](#)

Strain relief plate; for female and male connectors; 1 part; Pin spacing 3.5 mm; light gray

---

### Installation Notes


#### Installation

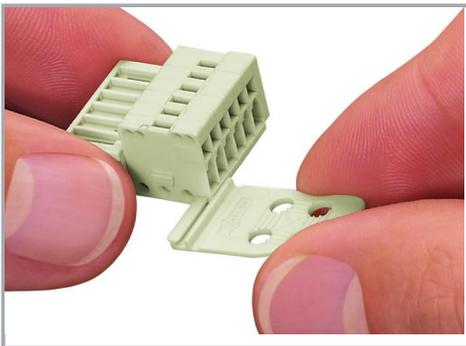

Strain relief plates for factory or in-the-field assembly


#### Application

Subject to changes. Please also observe the further product documentation!

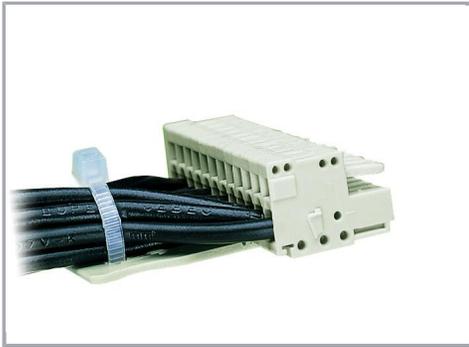

Strain relief plate, for factory assembly  
1-conductor female connector, 2.5 mm pin  
spacing, light gray,  
12-pole, with strain relief plate  
733-112/034-000

#### Application

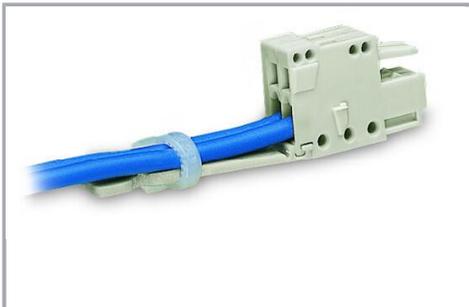

Strain relief plate, for factory assembly  
1-conductor female connector, 2.5 mm pin  
spacing, light gray,  
2-pole, with strain relief plate (733-102/032-  
000)

Subject to changes. Please also observe the further product documentation!