


ELECTRO-ACOUSTIC TRANSDUCER BRT1206P-01 SERIES

■ FEATURES


Ultra thin ($\phi 12 \times 5.4$)

■ FREQUENCY RESPONSE

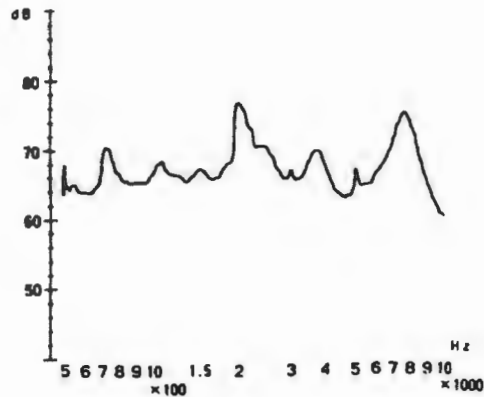

applied voltage : 1.5 V, 1/2 duty, square wave
distance for measurement : 10 cm

■ DIMENSIONS

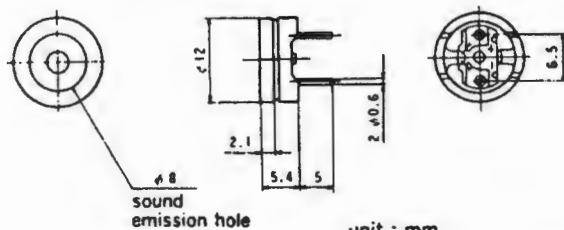

unit : mm
housing material : NORYL SE1-J

SPECIFICATIONS	
TYPE	BRT1206P-01
RATED VOLTAGE (V)	1.5
OPERATING VOLTAGE (V)	1~2
*RATED CURRENT (mA)	MAX.10
COIL RESISTANCE (ohm)	50 ± 7.5
**COIL IMPEDANCE (ohm)	140
*SOUND OUTPUT AT 10cm (dB)	MIN.70
RESONANT FREQUENCY (Hz)	2,048
OPERATING TEMPERATURE (C)	-20 ~ +60
STORAGE TEMPERATURE (C)	-30 ~ +70
WEIGHT (g)	2

*Value applying rated voltage (2,048Hz, 1/2 duty, square wave)
**Value applying (2,048Hz, sine wave, measuring current 60 uA)
Note: Lead wire type is available on request.

INTERVOX
International ©

INTERNATIONAL COMPONENTS CORPORATION
215 MCCORMICK DRIVE, BOHEMIA, NY 11716
FAX: 631-952-9595 FAX: 631-952-9597

Title

Electro Acoustic Transducer

Intervox Model #

BRT1206P-01

Rev
A

Scale

Date 1/25/91

Sheet 1 of 1