

## SMDGP (RVT) Series 貼片型鋁電解電容器

### Features:

- 105 °C standard, Load life=2000 hours
- Designed for surface mounting on high density PC board
- Designed for reflow soldering process
- General purpose applications, RoHS compliant



Marking color : Black


### Specifications:

Category temperature range	-55°C ~ 105 °C								
Capacitance tolerance	±20% (120Hz / +20 °C)								
Leakage current	$I \leq 0.01 CV$ or $3\mu A$ whichever is greater (after 2 minutes)								
Resistance to soldering heat	After reflow soldering and then being stabilized at +20 °C, capacitors shall meet the following limits. (1) Capacitance change: within ±10% of the initial value. (2) Dissipation factor: within the initial limit. (3) Leakage current: within the initial limit.								
Shelf Life	After storage for 1000 hours at +105 °C ± 2°C with no voltage applied and then being stabilized at +20 °C, capacitors shall meet the limits specified in endurance.								
Endurance	After applying rated working voltage for 2000 hours at +105 °C ± 2°C, and then being stabilized at +20 °C, capacitors shall meet the following limits. (1) Capacitance change: $\phi D \leq 6.3\text{mm}$ : within ± 25% of the initial value. $\phi D \geq 8\text{mm}$ : within ± 20% of the initial value. (2) Dissipation factor: $\phi D \leq 6.3\text{mm}$ : less than 300% of the initial value. $\phi D \geq 8\text{mm}$ : less than 200% of the initial value.								
Characteristics at low temp.	Rated voltage	6.3	10	16	25	35	50	63	100
	Z (-25°C) / Z (+20°C)	4	4	3	2	2	2	2	3
Frequency Correction factor for ripple current	Z (-55°C) / Z (+20°C)	12	8	6	4	3	3	3	4
	Impedance ratio at 120Hz								
	Frequency	50Hz		120Hz		1kHz		10kHz	
C ≤ 1000 μF	0.7	1.0		1.2		1.3			
C > 1000 μF	0.8	1.0		1.1		1.2			

Lumimax Part #	Capacitance	Tolerance	Voltage - Rated	Ripple Current @ Low Frequency	Size / Dimension (D)
AEC-SMD-0.47UF-50V	0.47uF	$\pm 20\%$	50V	8 mA @ 120 Hz	0.157" Dia (4.00mm)
AEC-SMD-1UF-50V	1uF	$\pm 20\%$	50V	8 mA @ 120 Hz	0.157" Dia (4.00mm)
AEC-SMD-2.2UF50V	2.2uF	$\pm 20\%$	50V	12 mA @ 120 Hz	0.157" Dia (4.00mm)
AEC-SMD-4.7UF-50V	4.7uF	$\pm 20\%$	50V	14 mA @ 120 Hz	0.157" Dia (4.00mm)
AEC-SMD-10UF-50V	10uF	$\pm 20\%$	50V	32 mA @ 120 Hz	0.248" Dia (6.30mm)
AEC-SMD-22UF-50V	22uF	$\pm 20\%$	50V	38 mA @ 120 Hz	0.248" Dia (6.30mm)
AEC-SMD-47UF-50V	47uF	$\pm 20\%$	50V	60 mA @ 120 Hz	0.248" Dia (6.30mm)
AEC-SMD-100UF-35V	100uF	$\pm 20\%$	35V	85 mA @ 120 Hz	0.248" Dia (6.30mm)
AEC-SMD-220UF-25V	220uF	$\pm 20\%$	25V	180 mA @ 120 Hz	0.248" Dia (6.30mm)
AEC-SMD-470UF-25V	470uF	$\pm 20\%$	25V	280 mA @ 120 Hz	0.315" Dia (8.00mm)
AEC-SMD-1000UF-25V	1000uF	$\pm 20\%$	25V	580 mA @ 120 Hz	0.394" Dia (10.00mm)

Lumimax Part #	Height (L) - Seated (Max)	Surface Mount Land Size (A x B)
AEC-SMD-0.47UF-50V	0.212" (5.40mm)	0.169" L x 0.169" W (4.30mm x 4.30mm)
AEC-SMD-1UF-50V	0.212" (5.40mm)	0.169" L x 0.169" W (4.30mm x 4.30mm)
AEC-SMD-2.2UF50V	0.212" (5.40mm)	0.169" L x 0.169" W (4.30mm x 4.30mm)
AEC-SMD-4.7UF-50V	0.212" (5.40mm)	0.169" L x 0.169" W (4.30mm x 4.30mm)
AEC-SMD-10UF-50V	0.212" (5.40mm)	0.260" L x 0.260" W (6.60mm x 6.60mm)
AEC-SMD-22UF-50V	0.212" (5.40mm)	0.260" L x 0.260" W (6.60mm x 6.60mm)
AEC-SMD-47UF-50V	0.303" (7.70mm)	0.260" L x 0.260" W (6.60mm x 6.60mm)
AEC-SMD-100UF-35V	0.303" (7.70mm)	0.260" L x 0.260" W (6.60mm x 6.60mm)
AEC-SMD-220UF-25V	0.303" (7.70mm)	0.260" L x 0.260" W (6.60mm x 6.60mm)
AEC-SMD-470UF-25V	0.402" (10.20mm)	0.327" L x 0.327" W (8.30mm x 8.30mm)
AEC-SMD-1000UF-25V	0.413" (10.5mm)	0.406" L x 0.406" W (10.30mm x 10.30mm)

Marking :

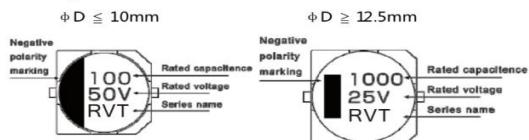

Dimensions :

