
PAR	RF-ATN-NMF-5W2			
REV	DESCRIPTION	DWN	DATE	APPROVED
_	FNGINFERING RELEASE	C7S	10/10/18	JDMc

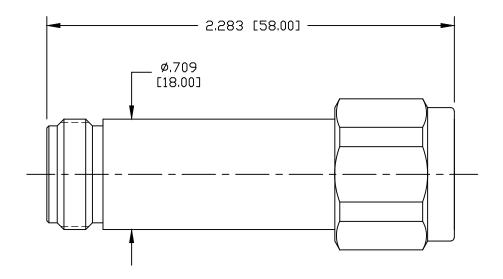

SPECIFICATIONS:

IMPEDANCE: 50 OHMS FREQUENCY RANGE: 0-3 GHz POWER: 5 WATT (AVERAGE) VSWR MAX: ≤1.2:1

ATTENUATION: 2dB ACCURACY: ±0.8dB

OPERATING TEMPERATURE: -30°C TO +65°C

NOTES:

ALL CONNECTORS WILL HAVE PROTECTIVE CAPS ON

CUSTOMER OUTLINE DRAWING

ALL DIMENSIONS ARE REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]

DRAWN C. ZUNIGA	10/10/18			
CHECKED				
ORJ DRAWN C. ZUNIGA	10/10/18			

PROPRIETARY AND CONFIDENTIAL

THIS DRAVING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES, ANY
UNAUTHORIZED USE OF THIS
DRAVING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES, ANY VOILLATION IS
PUNISHABLE UNDER U.S.
COPPERIGHT LAWS. COPYRIGHT LAWS.

7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340 DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

5 WATT ATTENUATOR N MALE TO N FEMALE 2dB

	SIZE	SIZE CABLE GROUP DWG NO.						REVISION		
	А			RF.	-ATN-NM	F-5W	'2	_	_	
1	SCALE: ENGINEE NTS		RING ID:	000000	SHEET	1	OF	1		