

PART NO.

**RF-ATNLP-43MF-5W3**

REV

DESCRIPTION

DWN

DATE

APPROVED

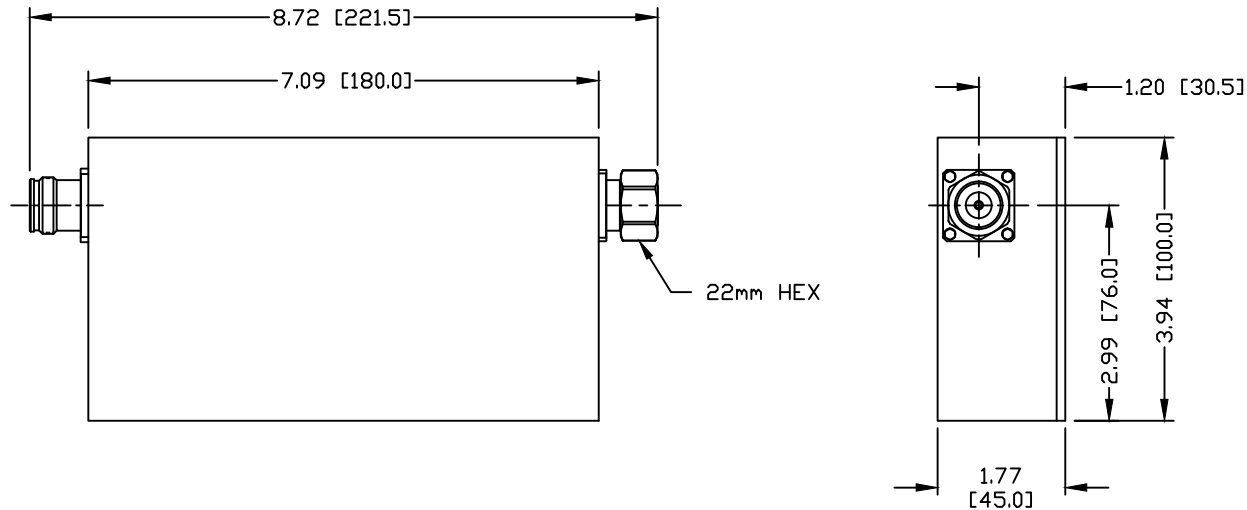
-

ENGINEERING RELEASE

CZS

09/19/19

JDMc

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms  
 OPERATION FREQUENCY BAND: 617-2700MHz  
 ATTENUATION: -3dB  
 COUPLING TOLERANCE:  $\pm 1.0$ dB  
 AVERAGE POWER: 5 WATT  
 VSWR:  $\leq 1.3$   
 3rd ORDER IM:  $\leq -150$ dBc (RELATIVE TO CARRIER)  
 3rd ORDER IM TEST METHOD: 2x37dBm CARRIERS  
 OPERATION TEMPERATURE: -30°C ~ +65°C  
 COLOR: BLACK  
 REGULATORY COMPLIANCE/CERTIFICATIONS: RoHS

CUSTOMER  
OUTLINE DRAWINGALL DIMENSIONS  
ARE REFERENCE ONLY
 UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN INCHES  
 AND [MILLIMETERS]

DRAWN	
C. ZUNIGA	09/19/19
CHECKED	
ORJ DRAWN	
C. ZUNIGA	09/19/19

**RoHS**  
**COMPLIANT**

 PROPRIETARY AND CONFIDENTIAL  
 THIS DRAWING CONTAINS  
 INFORMATION PROPRIETARY TO  
 RF INDUSTRIES. ANY  
 UNAUTHORIZED USE OF THIS  
 DRAWING IS EXPRESSLY  
 PROHIBITED WITHOUT WRITTEN  
 PERMISSION FROM RF  
 INDUSTRIES. ANY VIOLATION IS  
 PUNISHABLE UNDER U.S.  
 COPYRIGHT LAWS.

**RFconnectors**  
 DIVISION OF RF INDUSTRIES, LTD.

 7610 MIRAMAR RD.  
 SAN DIEGO, CA 92126  
 (858) 549-6340  
 (858) 549-6345 FAX
**5 WATT 3dB ATTENUATOR**

4.3/10 MALE TO 4.3/10 FEMALE - 617-2700MHz

SIZE	CABLE GROUP	DWG NO.	REVISION
A	N/A	<b>RF-ATNLP-43MF-5W3</b>	—
SCALE:	ENGINEERING ID:	SHEET 1 OF 1	
NTS	000000		