

PART NO.

RF-ATNLP-43MF-5W8

REV

DESCRIPTION

DWN

DATE

APPROVED

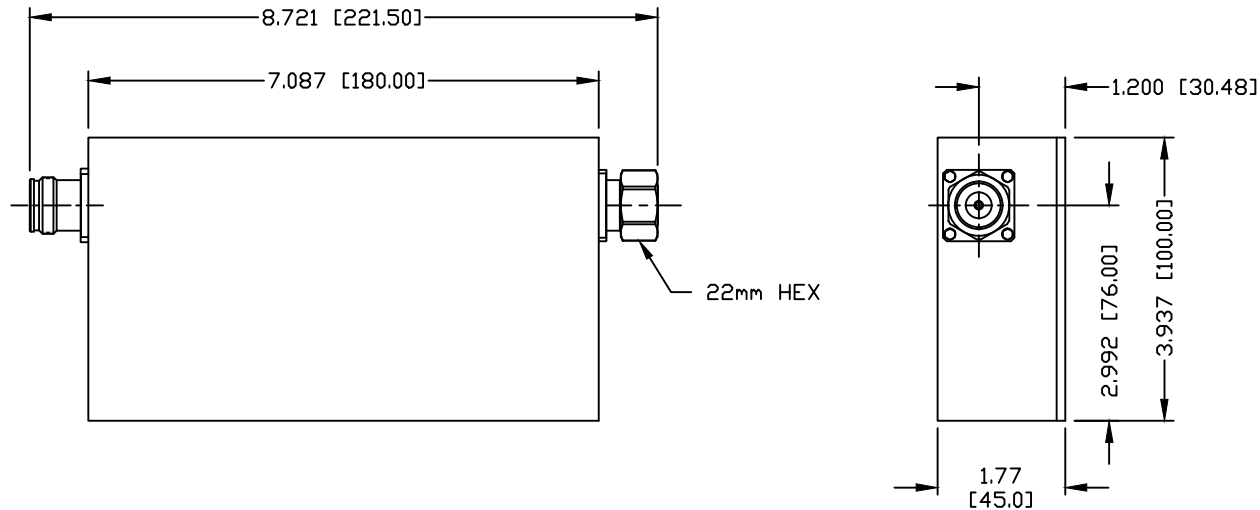
-

ENGINEERING RELEASE

CZS

09/19/19

JDMc

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms
 OPERATION FREQUENCY BAND: 617-2700MHz
 ATTENUATION: -8dB
 COUPLING TOLERANCE: ± 1.2 dB
 AVERAGE POWER: 5 WATT
 VSWR: ≤ 1.30
 3rd ORDER IM: ≤ -150 dBc (RELATIVE TO CARRIER)
 3rd ORDER IM TEST METHOD: 2x37dBm CARRIERS
 OPERATION TEMPERATURE: $-30^{\circ}\text{C} \sim +65^{\circ}\text{C}$
 COLOR: BLACK
 REGULATORY COMPLIANCE/CERTIFICATIONS: RoHS

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLY
 UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 AND [MILLIMETERS]

DRAWN	
C. ZUNIGA	09/19/19
CHECKED	
ORJ DRAWN	
C. ZUNIGA	09/19/19

RoHS
COMPLIANT

 PROPRIETARY AND CONFIDENTIAL
 THIS DRAWING CONTAINS
 INFORMATION PROPRIETARY TO
 RF INDUSTRIES. ANY
 UNAUTHORIZED USE OF THIS
 DRAWING IS EXPRESSLY
 PROHIBITED WITHOUT WRITTEN
 PERMISSION FROM RF
 INDUSTRIES. ANY VIOLATION IS
 PUNISHABLE UNDER U.S.
 COPYRIGHT LAWS.

RFconnectors
 DIVISION OF RF INDUSTRIES, LTD.

 7610 MIRAMAR RD.
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX
5 WATT 8dB ATTENUATOR

4.3/10 MALE TO 4.3/10 FEMALE - 617-2700MHz

SIZE	CABLE GROUP	DWG NO.	REVISION
A	N/A	RF-ATNLP-43MF-5W8	—
SCALE:	ENGINEERING ID:	SHEET 1 OF 1	
NTS	000000		