



Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Insulation Boots & Sleeves



Insulation Boot & Sleeve Product Type: **Insulation Boot**
Primary Product Material: **PVC**
Primary Product Color: **Black**
Packaging Method: **Bag**
Operating Temperature Range: **-40 – 105 °C [-40 – 221 °F]**

Features

Product Type Features

Insulation Boot & Sleeve Product Type	Insulation Boot
---------------------------------------	-----------------

Body Features

Primary Product Material	PVC
Primary Product Color	Black

Dimensions

Product Length	47.7 mm[1.878 in]
----------------	-------------------

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	100
Packaging Method	Bag



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: MCCP (5% in Component Part) Article Safe Usage Statements: Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Customers Also Bought


TE Part #1-1879074-7
THS15 12R 5%

TE Part #6648239-1
JUMPER,CRN SKT


TE Part #6648234-1
CONTACT,SKT,#0

TE Part #8-324001-1
SPLICE,SOLIS BUTT STRAP 24-20







TE Part #6-2213766-1
AV19 DPL 5A POWER LED WHITE 12V




TE Part #ASHD622-24320PN016
PLUG ASSY.ASHD. 24320 PLANFORM.
16MM CRI



TE Part #6-1532166-6
094-4105-9003=MCK-N1-X1-9PRT1



TE Part #6-1532166-7
094-4706-9003=MCK-N1-X1-51SRT1

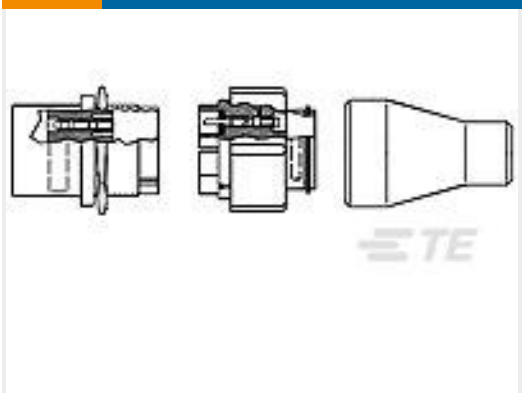

TE Part #863017-3
4 PIN PLUG & RECEPT KIT

Documents

- CAD Files

Customer View Model

ENG_CVM_CVM_1651003-1_C.2d_dxf.zip

English
- 3D PDF

3D

Customer View Model

ENG_CVM_CVM_1651003-1_C.3d_igs.zip

English
- Customer View Model

ENG_CVM_CVM_1651003-1_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

- Datasheets & Catalog Pages

POWER_CONNECTORS_CATALOG_SEC02_CABLE_MOUNTED

English
- Busbar Power Brochure

English

- Product Specifications

Application Specification

English

- Agency Approvals

Agency Approval Document

English

1651003-1

901-0121-32031=BOOT,INSULATING

