




Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

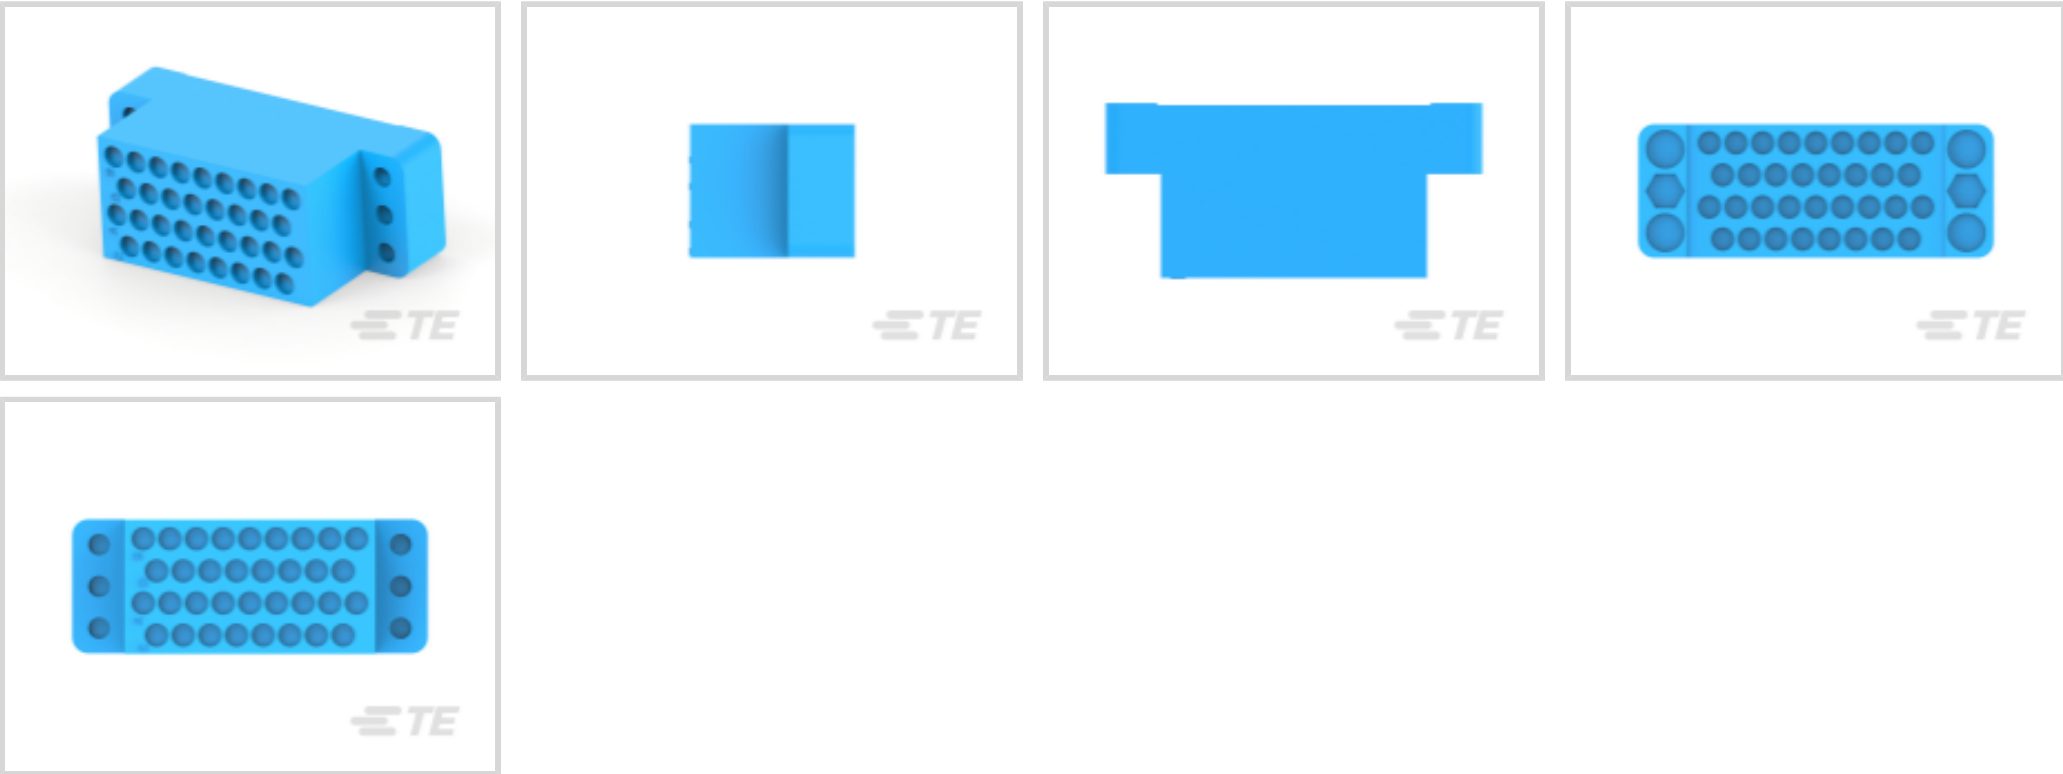

Rectangular Power Connector Type: **Housing**

Connector & Housing Type: **Plug**

Connector System: **Cable-to-Cable, Cable-to-Panel**

Number of Positions: **34**

Centerline (Pitch): **3.81 mm [.15 in]**

Features

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Plug
Connector System	Cable-to-Cable, Cable-to-Panel
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	34
Number of Power Positions	34
Number of Signal Positions	34
Number of Rows	4

Electrical Characteristics

Operating Voltage	250 VDC
-------------------	---------

Contact Features

Contact Current Rating (Max)	13 A
------------------------------	------



Contact Retention Within Housing	With
Contact Type	Pin

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Panel Mount Feature	With
Panel Mount Feature Type	Screw Mount
Connector Mounting Type	Panel Mount

Housing Features

Centerline (Pitch)	3.81 mm[.15 in]
Housing Color	Blue
Housing Material	Diallyl Phthalate

Dimensions

Connector Height	50.8 mm[1.999 in]
Product Width	19.05 mm[.75 in]
Product Length	23.24 mm[.915 in]
Wire Size	.05 - 2 mm ²
Row-to-Row Spacing	4.57 mm[.18 in]

Usage Conditions

Operating Temperature Range	-65 - 125 °C[-85 - 257 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards


UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire

Packaging Features

Packaging Quantity	85
Packaging Method	Carton

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>





EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: tris(2-methoxyethoxy)vinylsilane (.11% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 200838-3
FEMALE BLOCK,34 PL,M SERIES




TE Part # 1-201357-0
M-SERIES BLOCK,34 POS

Also in the Series | AMP M Series

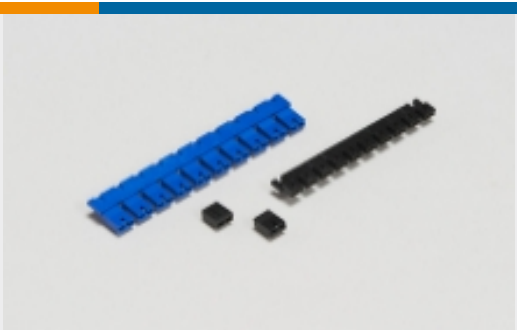

Board-to-Board Jumpers & Shunts(7)

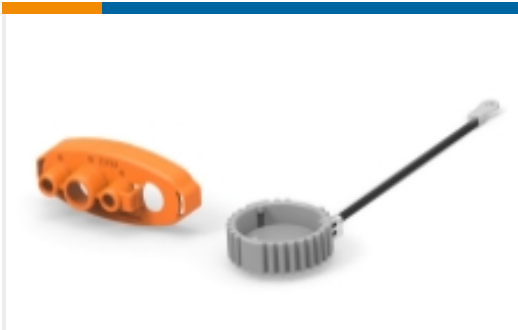

Connector Caps & Covers(12)



Connector Hardware(18)



Connector Strain Relief(11)



Rack & Panel Connectors(1)




Rectangular Power Connectors(65)

Customers Also Bought



TE Part # 5299850001
HT-SCE High Temperature Sleeves

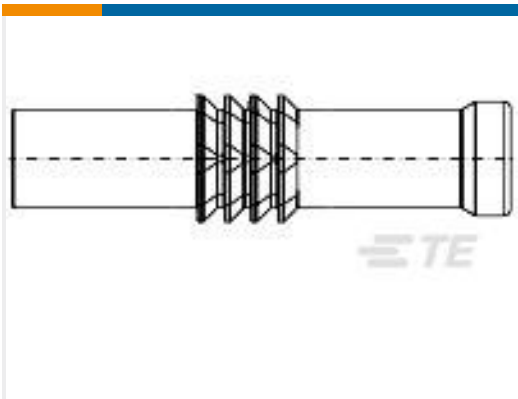

TE Part # 1811633-1
SEAL PLUG



TE Part # 322366
DG 22-16COM22-18MIL HR R 10




TE Part # YDTS26W25-43PNV001
PLUG ASSY



TE Part # YDTS26W23-53PNV001
PLUG ASSY



TE Part # ZPF000000000000335
006-0912-12 A

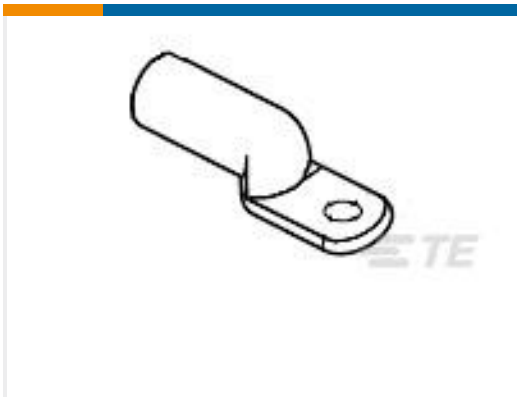

TE Part # 277148-4
TERMINAL,COPALUM R 6 3/8



TE Part # 1662-202-1631
CONTACT



TE Part # 2-330358-2
BNC PLUG KIT

Documents



Product Drawings

MALE BLOCK - 34 PL. SER. "M"

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_201357-3_AL.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_201357-3_AL.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_201357-3_AL.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

M_SERIES_PIN_AND_SOCKET_CONNECTORS

English

Instruction Sheets

Instruction Sheet (U.S.)

English

20 HVC, 34 AND 50 POSITION SERIES "M" CONNECTOR

English

Agency Approvals

Agency Approval Document

English