
205690-2 - ACTIVE

AMP | AMP M Series

TE Internal #: 205690-2 Rectangular Power Connectors, Housing, Receptacle, Cable-to-Cable / Cable-to-Panel, 28 Position, 6.35 mm [.25 in] Centerline, AMP M Series

View on TE.com >

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

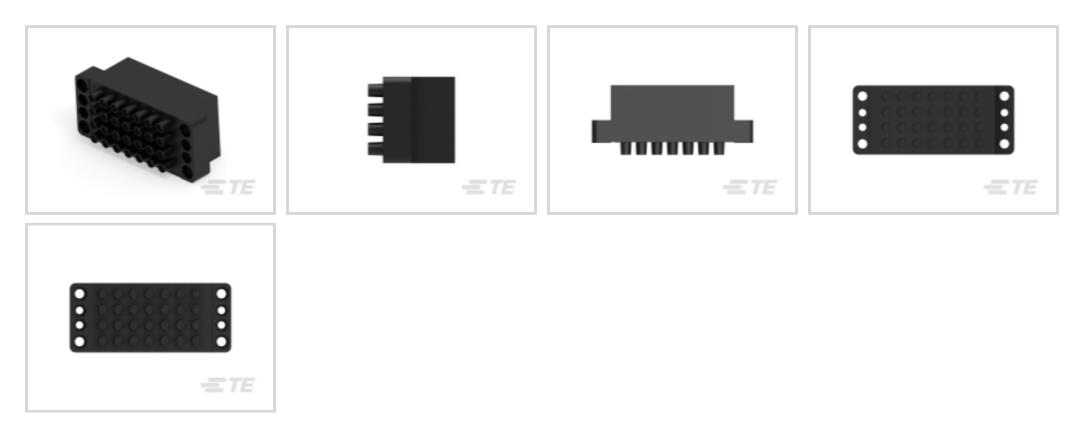

Rectangular Power Connector Type: Housing Connector & Housing Type: Receptacle Connector System: Cable-to-Cable, Cable-to-Panel Number of Positions: 28

Centerline (Pitch): 6.35 mm [.25 in]

Features



Product Type Features

Rectangular Power Connector Type	Housing				
Connector & Housing Type	Receptacle				
Connector System	Cable-to-Cable, Cable-to-Panel				
Sealable	No				
Connector & Contact Terminates To	Wire & Cable				
Configuration Features					
Number of Positions	28				
Number of Power Positions	28				
Number of Signal Positions	28				
Number of Rows	4				
Electrical Characteristics					
Operating Voltage	1800 VDC				
Contact Features					
Contact Current Rating (Max)	13 A				

C For support call+1 800 522 6752

Rectangular Power Connectors, Housing, Receptacle, Cable-to-Cable / Cable-to-Panel, 28 Position, 6.35 mm [.25 in] Centerline, AMP M Series



Contact Retention Within Housing	With
Contact Type	Socket
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Panel Mount Feature	With
Panel Mount Feature Type	Screw Mount
Connector Mounting Type	Panel Mount
Housing Features	
Centerline (Pitch)	6.35 mm[.25 in]
Housing Color	Black
Housing Material	Phenolic
Dimensions	
Connector Height	65.91 mm[2.595 in]
Product Width	28.19 mm[1.11 in]
Product Length	28.45 mm[1.12 in]
Wire Size	.05 – 2 mm²
Row-to-Row Spacing	6.35 mm[.25 in]
Usage Conditions	
Operating Temperature Range	-55 – 150 °C[-67 – 302 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire
Packaging Features	
Packaging Quantity	1
Packaging Method	Package

Product Compliance

For compliance documentation, visit the product page on TE.com>

C For support call+1 800 522 6752

Rectangular Power Connectors, Housing, Receptacle, Cable-to-Cable / Cable-to-Panel, 28 Position, 6.35 mm [.25 in] Centerline, AMP M Series



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

TE Part # 205689-2 PIN BLOCK 28 POS. SPL.

Also in the Series AMP M Series

Rectangular Power Connectors, Housing, Receptacle, Cable-to-Cable / Cable-to-Panel, 28 Position, 6.35 mm [.25 in] Centerline, AMP M Series



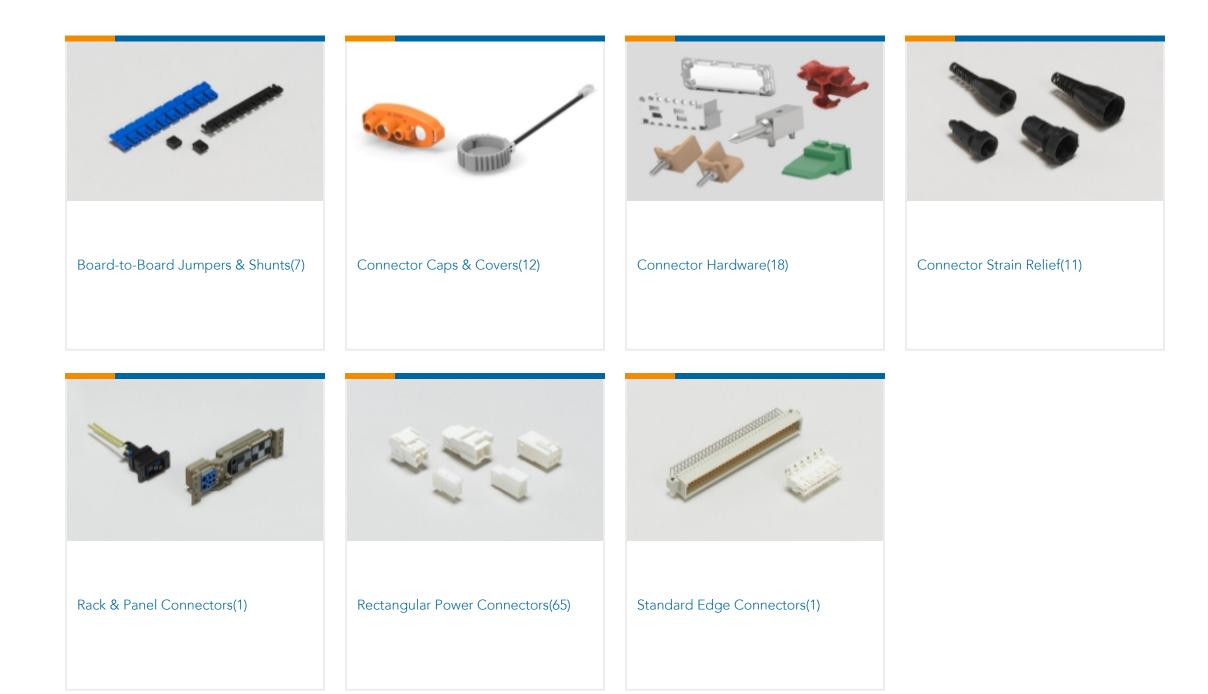

Customers Also Bought



TE Part #211/6/-2	TE Part #201089-4	TE Part #640902-1	TE Part #2-327735-1
17-9 CPC RECEPT	SERIES"M" JACKSCREW SOCKET ASS	RECEPT,PIDG FASTON 22-18 250	PG SPD 22-16 COMM 22-18 MIL 6
	TE DO	ETE	TE TE
TE Part #1-201046-2	TE Part #207234-1	TE Part #329966	TE Part #2-1393117-9
SERIES "M" MIN RECT GUIDE PIN	UNASSM JS KIT,M SERIES	SOLIS R 22-16COMM 22-18MIL 1/2	KUP-11A55-120=KU



Documents

Rectangular Power Connectors, Housing, Receptacle, Cable-to-Cable / Cable-to-Panel, 28 Position, 6.35 mm [.25 in] Centerline, AMP M Series



Product Drawings SOC. BLOCK 28 POS. SPL.

English

CAD Files

Customer View Model

ENG_CVM_CVM_205690-2_M.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_205690-2_M.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_205690-2_M.3d_igs.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages M_SERIES_PIN_AND_SOCKET_CONNECTORS

English

Agency Approvals Agency Approval Document

English

Agency Approval Document

English