


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00057	Connector, dc jack, 3.5x1.35xL16.5 mm, molding style	1	
2	30-00405	Wire, 2C TS, 24 AWG, UL2468, 300V, 80C, 3.0 mm, VW-1, PVC, 87A, white	1	
3	24-00005	Overmold, PVC, white	1	

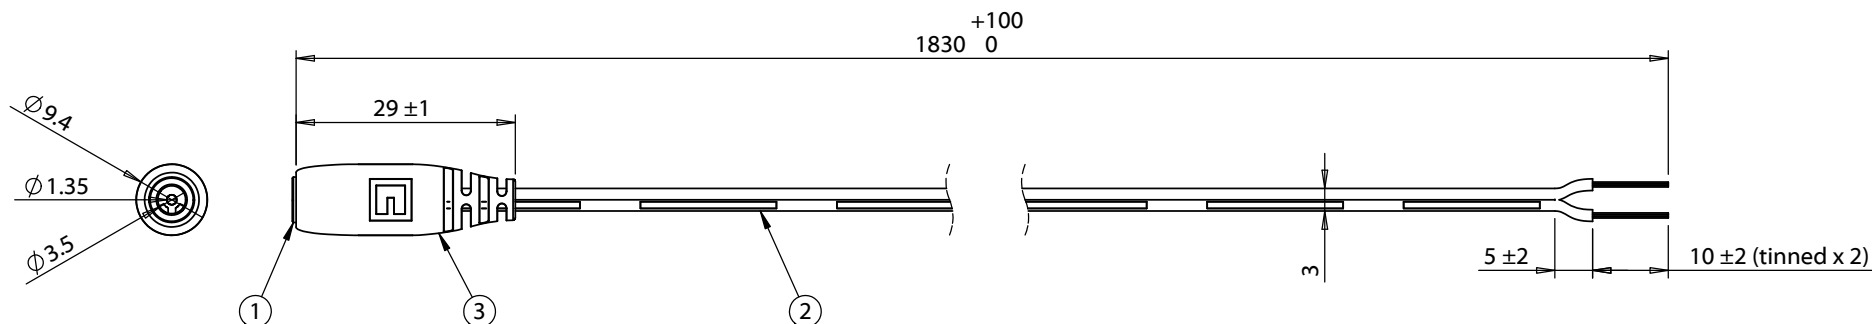

Notes:

Cables individually tied and bundled in groups of 10

Functionally equivalent components may be substituted

4.5 A, 48 Vdc

Wiring Diagram	
50-00057	wire color
center	white with stripe
sleeve	white

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com	
A	12/22/2015	Initial release	Verified:			
			Dimensions are in millimeters.	Function test: no open, no short circuit, no intermittent	Description: Cable, 1830 mm, 3.5x1.35 mm 50-00057 dc jack to stripped tinned, 24 AWG, 30-00405 wire, white	
			Tolerances:			
			X: ± 0.5 mm	Description:	Size: A	
			X.X: ± 0.3 mm			
			X.XX: ± 0.05 mm		Scale: 1:2	
					Part number: 10-01268	
					Sheet 1 of 1	

5

↑

4

3

2

1