ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00056	Connector, dc plug, 3.5x1.35xL20mm, molding style, spring contacts	1	
2	30-00692	Wire, 2C TS, 24 AWG, UL2464, 300V, 80C, 4.0 mm, VW-1, PVC	1	
3	24-00181	Overmold, dc plug, 3.5 mm, Tensility	1	black

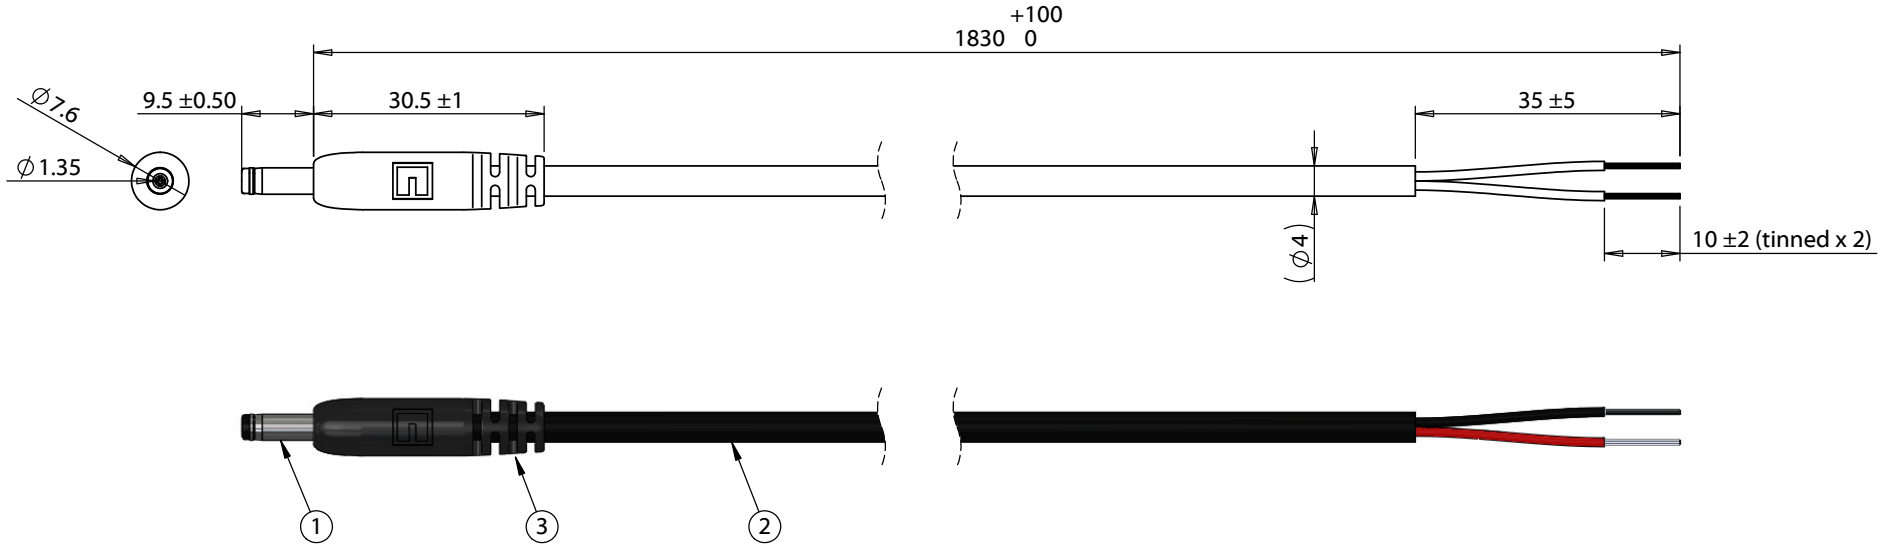

Notes:
Functionally equivalent components may be substituted

Electrical requirements: 4.5 A, 48 Vdc

Wiring Diagram	
50-00056	wire color
center	red
sleeve	black

Revision:	Date:	Description:
A	9/13/2016	Initial release

Prepared: KW Digitally signed by KW Date: 2024.01.29 12:51:25 -08'00'

Verified: BL Digitally signed by BL Date: 2024.01.29 16:36:57 -08'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:

RoHS and REACH compliant

Function test: no open, no short circuit, no intermittent

Description:

Cable, 1830 mm, 3.5x1.35x9.5 mm 50-00056 dc plug to stripped tinned, 24 AWG, 30-00692 wire

TENSILITY

tel 1.541.323.3228 *800* 877.670.7118
fax 1.541.323.4202 *web* tensility.com

Size: A

Part number: 10-02230

Scale: 1:1

Sheet 1 of 1

5 4 3 2 1