


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00136	Connector, dc plug, 4.0x1.7xL19.0 mm, spring contacts, brass nickel plated, yellow insulator	1	
2	50-00047	Connector, dc jack, 4.0x1.7xL16.7 mm, brass nickel plated, molding style	1	
3	30-00404	Wire, 2C TS, 24 AWG, UL2468, 300V, 80C, 3.0 mm, VW-1, PVC, 87A	1	
4	24-00009	Overmold, PVC	1	black
5	24-00004	Overmold, PVC	1	black

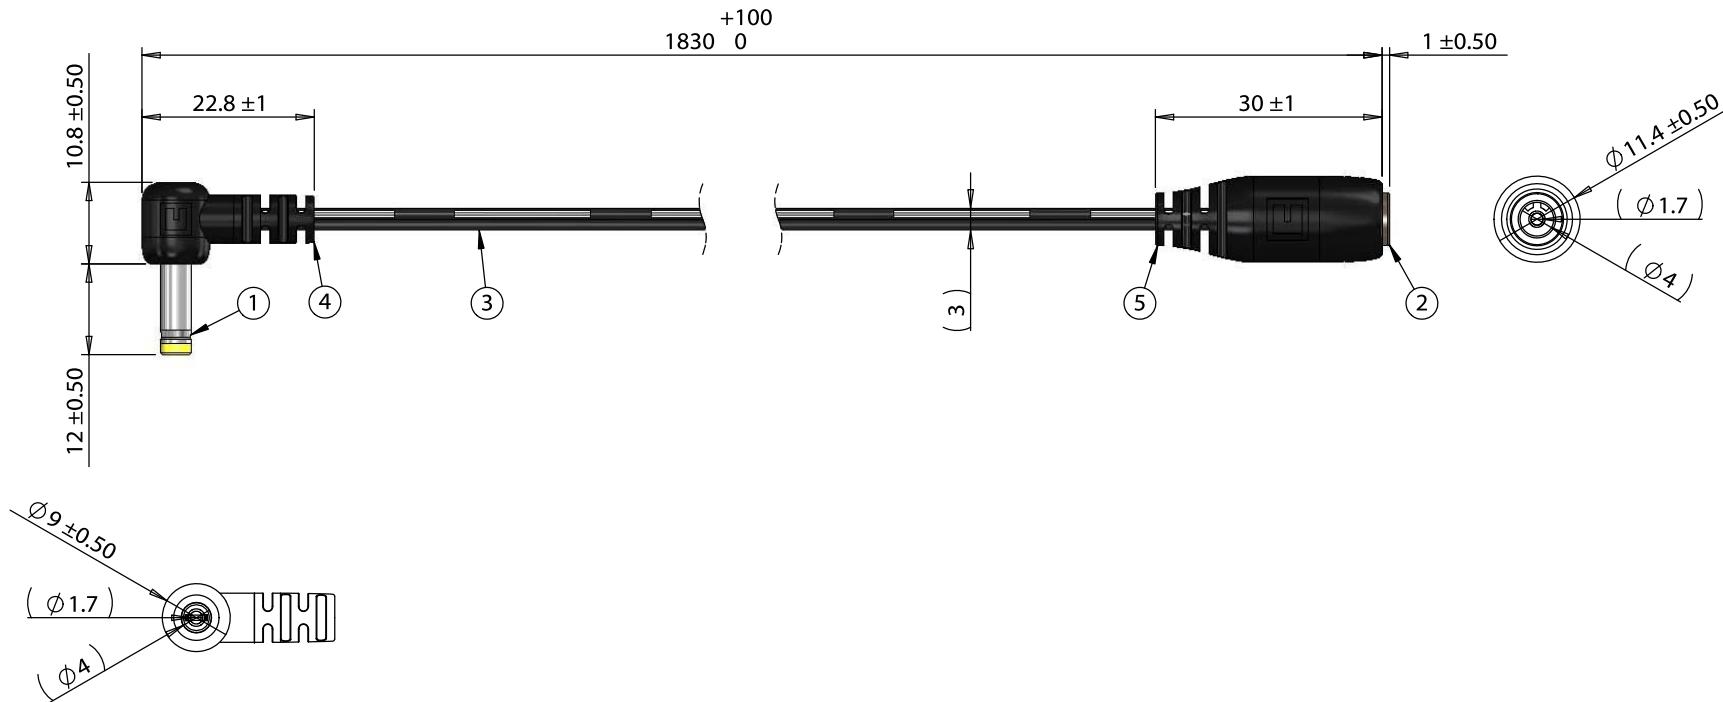

Wiring Diagram		
50-00136	wire color	50-00047
center	black with stripe	center
sleeve	black	sleeve

Notes:

Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared: GL <small>Digitally signed by GL Date: 2018.02.14 09:48:24 -08'00"</small>	Notes: RoHS compliant Function test: no open, no short circuit, no intermittent	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	01/22/2018	Initial release	Verified: AW <small>Digitally signed by AW Date: 2018.02.14 11:15:56 -08'00"</small>	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 1830 mm, 4.0x1.7x12 mm 90° 50-00136 dc plug to 4.0x1.7 mm 50-00047 dc jack, 24 AWG, UL2468
					Size: A Part number: 10-02534
					Scale: 1:1 Sheet 1 of 1